


3-INPUT 1MUTE VIDEO SWITCH

■ GENERAL DESCRIPTION

NJM2273 is a switching IC for switching over from one audio or video input signal to another. Internalizing the mute function which can be operated by 3 inputs. It is a higher performance video switch, with the operating supply voltage 4.75 to 13V, frequency bandwidth 7MHz, crosstalk 75dB (at 4.43MHz).

■ PACKAGE OUTLINE



NJM2273S


■ FEATURES

- 3 Input, 1 - Output
- Internalizing Mute Function
- Operating Voltage (4.75~13.0V)
- Crosstalk 75 dB(at 4.43MHz)
- Wide Bandwidth Frequency 7MHz(2V<sub>r-p</sub> Input)
- Package Outline SIP9
- Bipolar Technology

■ APPLICATIONS

- VCR, Video Camera, AV-TV, Video Disk Player.

■ BLOCK DIAGRAM

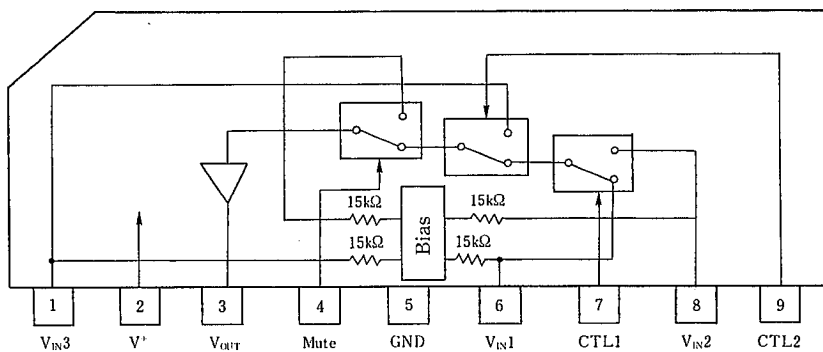

NJM2273S

5

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	14	V
Power Dissipation	P <sub>D</sub>	(SIP9) 500	mW
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

## ■ ELECTRICAL CHARACTERISTICS

(V\*=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I <sub>CC1</sub>	V*=5V (Note1)	4.5	6.5	8.5	mA
Operating Current (2)	I <sub>CC2</sub>	V*=9V (Note1)	5.8	8.3	10.8	mA
Voltage Gain	G <sub>V</sub>	V <sub>I</sub> = 100kHz, 2V <sub>P-P</sub> , V <sub>O</sub> /V <sub>I</sub>	-0.7	-0.2	+0.3	dB
Frequency Gain (1)	G <sub>F1</sub>	V <sub>I</sub> = 2V <sub>P-P</sub> , V <sub>O</sub> (7MHz)/V <sub>O</sub> (100kHz)	-1.0	0	+1.0	dB
Frequency Gain (2)	G <sub>F2</sub>	V <sub>I</sub> = 1V <sub>P-P</sub> , V <sub>O</sub> (10MHz)/V <sub>O</sub> (100kHz)	—	0	—	dB
Differential Gain	DG	V <sub>I</sub> = 2V <sub>P-P</sub> , Standard Staircase Signal	—	0.3	—	%
Differential Phase	DP	V <sub>I</sub> = 2V <sub>P-P</sub> , Standard Staircase Signal	—	0.3	—	deg
Output offset Voltage	V <sub>OS</sub>	(Note2)	-30	0	+30	mV
Crosstalk	CT	V <sub>I</sub> = 2V <sub>P-P</sub> , 4.43MHz, V <sub>O</sub> /V <sub>I</sub>	—	-75	—	dB
Muting Crosstalk	C <sub>TM</sub>	V <sub>I</sub> = 2V <sub>P-P</sub> , 4.43MHz, V <sub>O</sub> /V <sub>I</sub>	—	-60	—	dB
Switch Change Over Voltage	V <sub>CH</sub>	All inside switch ON	2.5	—	—	V
Switch Change Over Voltage	V <sub>CL</sub>	All inside switch OFF	—	—	1.0	V

(Note1) S1=S2=S3=S4=S5=S6=1

(Note2) Measure the output DC voltage difference between the following modes at S1=S2=S3=1

a) S4=S5=S6=1 b) S4=2, S5=S6=1 c) S5=2, S6=1 d) S6=2

## ■ CONTROL INPUT - OUTPUT SIGNAL


CTL1	CTL2	MUTE	OUTPUT SIGNAL
L	L	L	V <sub>IN1</sub>
H	L	L	V <sub>IN2</sub>
L/H	H	L	V <sub>IN3</sub>
L/H	L/H	H	Inside DC

■ TERMINAL EXPLANATION

PIN NO.	PIN NAME	VOLTAGE	INSIDE EQUIVALENT CIRCUIT
6 8 1	V <sub>IX1</sub> V <sub>IX2</sub> V <sub>IX3</sub> (Input)	2.5V	
7 9 4	CTL1 CTL2 Mute (Switching)		
3	V <sub>OUT</sub> (Output)	1.8V	
2	V <sup>+</sup>	5V	
5	GND		

5


## ■ TEST CIRCUIT

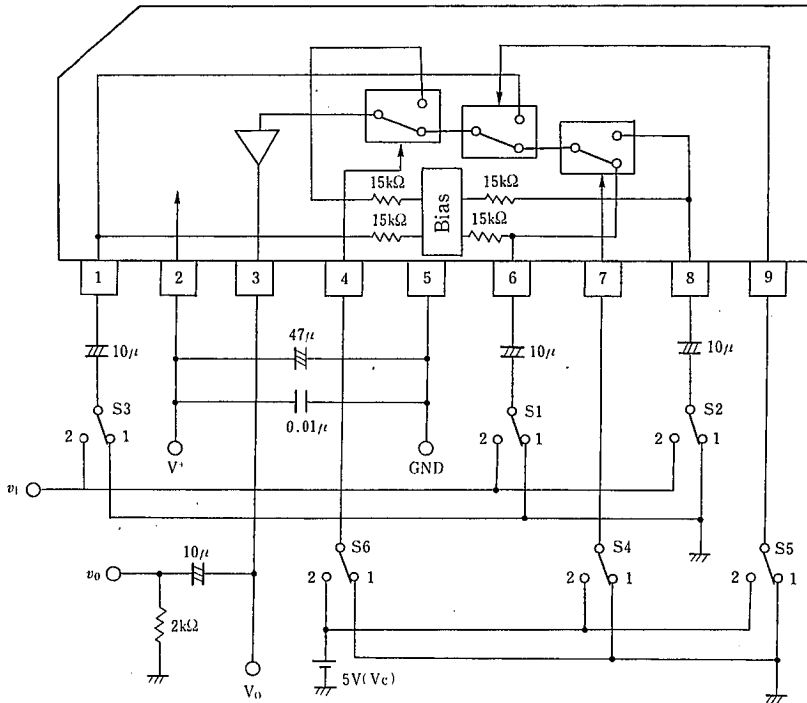


PARAMETER	S 1	S 2	S 3	S 4	S 5	S 6	TEST PART
I <sub>cc1</sub>	1	1	1	1	1	1	V <sup>+</sup>
I <sub>cc2</sub>	1	1	1	1	1	1	
G <sub>v1</sub>	2	1	1	1	1	1	v <sub>o</sub>
G <sub>t1</sub>	2	1	1	1	1	1	
DG <sub>1</sub>	2	1	1	1	1	1	
DP <sub>1</sub>	2	1	1	1	1	1	
V <sub>OS1</sub>	1	1	1	2	1	1	V <sub>o</sub>
CT <sub>1</sub>	2	1	1	2	1	1	v <sub>o</sub>
CT <sub>2</sub>	2	1	1	1	2	1	
CT <sub>3</sub>	1	2	1	1	1	1	
CT <sub>4</sub>	1	2	1	2	2	1	
CT <sub>5</sub>	1	1	2	1/2	1	1	
CT <sub>M1</sub>	2	1	1	1	1	2	v <sub>o</sub>
CT <sub>M2</sub>	1	2	1	2	1	2	
CT <sub>M3</sub>	1	1	2	1/2	2	2	
V <sub>OS1</sub>	1	1	1	2	1	1	V <sub>o</sub>
V <sub>C1</sub>	2	1	1	V <sub>c</sub>	1	1	V <sub>c</sub>
THD	2	1	1	1	1	1	v <sub>o</sub>

■ TYPICAL CHARACTERISTICS


Operating Current 1 vs. Temperature

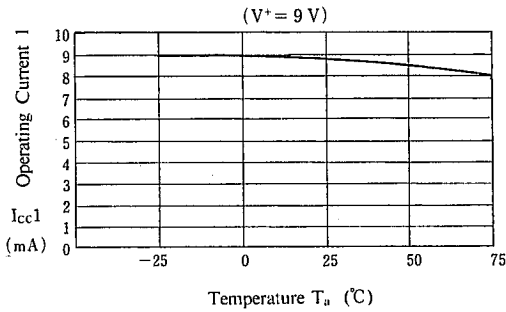


Operating Current 2 vs. Temperature

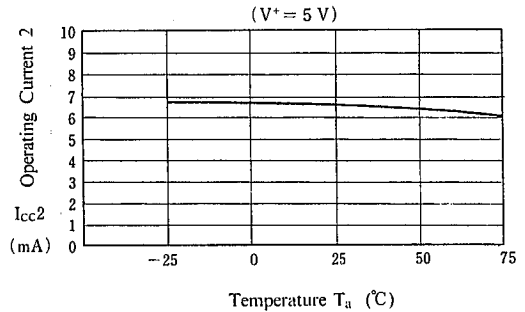


Voltage Gain 1 vs. Temperature

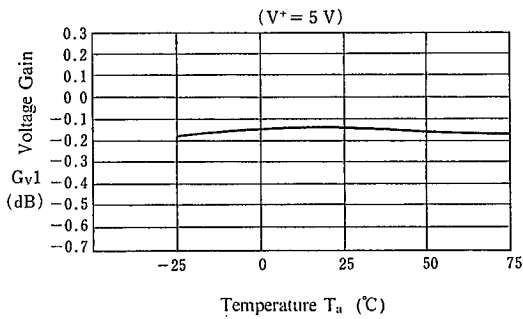


Frequency Gain 1 vs. Temperature  $T_a$  (°C)

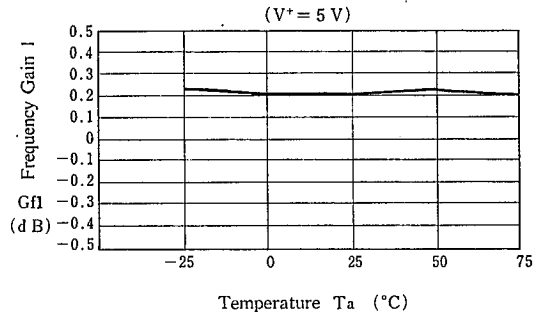

Differential Gain 1 vs. Temperature

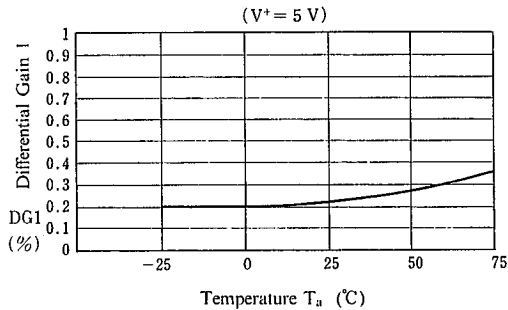


Differential Phase 1 vs. Temperature

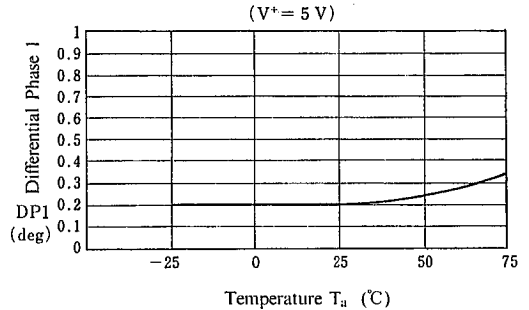


## TYPICAL CHARACTERISTICS


### Offset Voltage 1 vs. Temperature

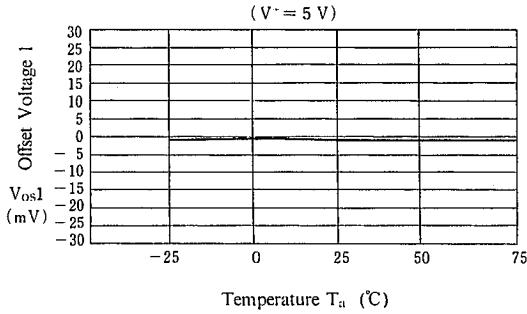


### Switch Change Over 1 vs. Temperature

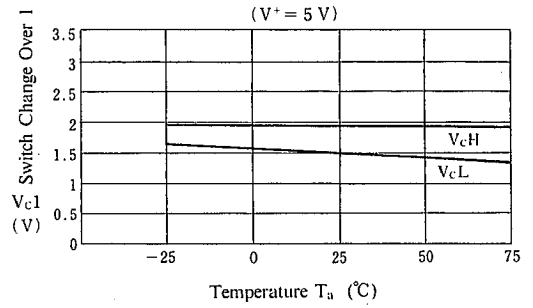


### Crosstalk 1 vs. Temperature

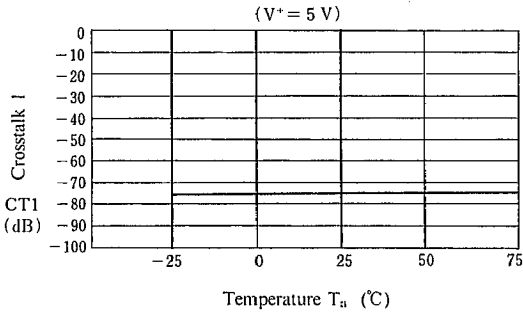


### Crosstalk 2 vs. Temperature

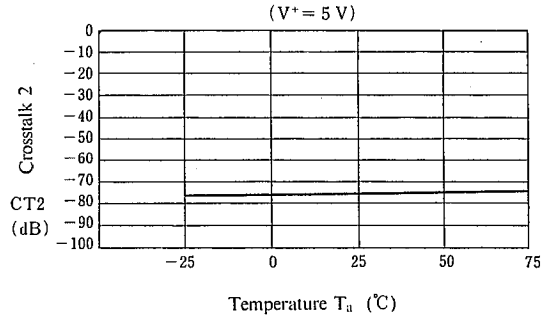

### Crosstalk 3 vs. Temperature

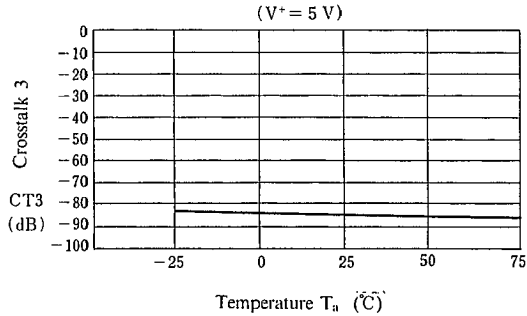


### Crosstalk 4 vs. Temperature

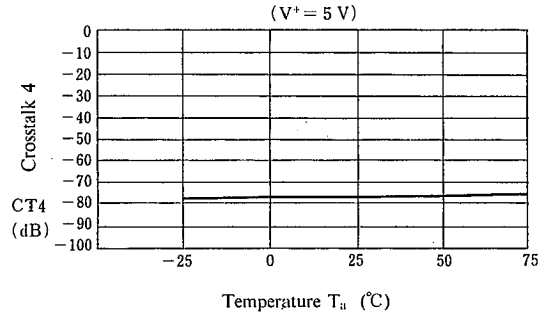

■ TYPICAL CHARACTERISTICS


Crosstalk 5 vs. Temperature

(V<sup>+</sup> = 5 V)

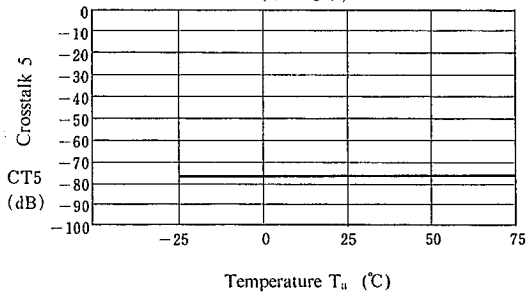


M. Crosstalk 1 vs. Temperature

(V<sup>+</sup> = 5 V)

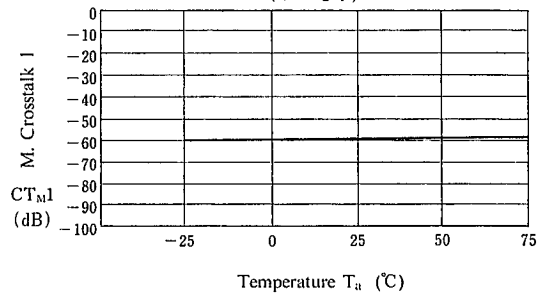


M. Crosstalk 2 vs. Temperature

(V<sup>+</sup> = 5 V)

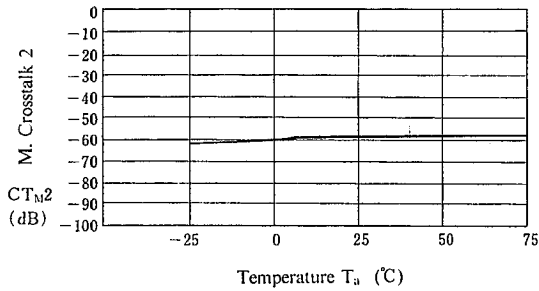


M. Crosstalk 3 vs. Temperature

(V<sup>+</sup> = 5 V)

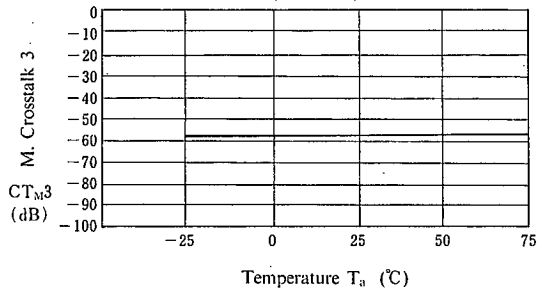


Operating Current vs. Operating Voltage

(Ta = 25°C)

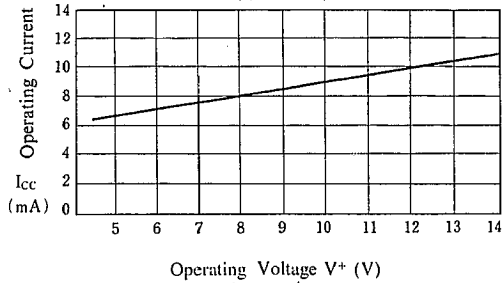

Voltage Gain 1 vs. Operating Voltage

(Ta = 25°C)

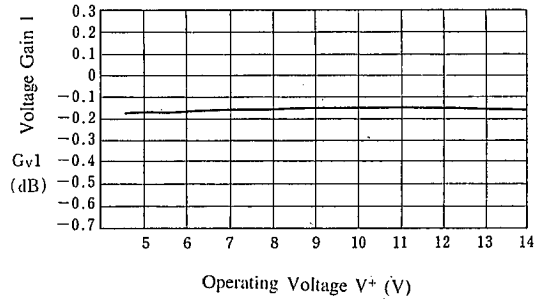


5

## TYPICAL CHARACTERISTICS


### Frequency Gain 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

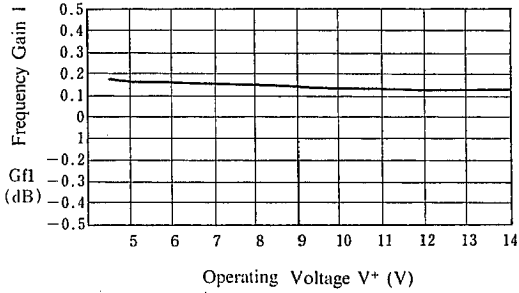


### Differential Gain 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

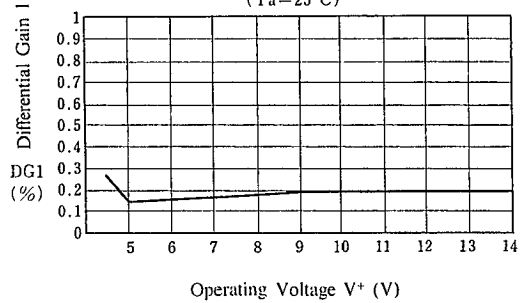


### Differential Phase 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

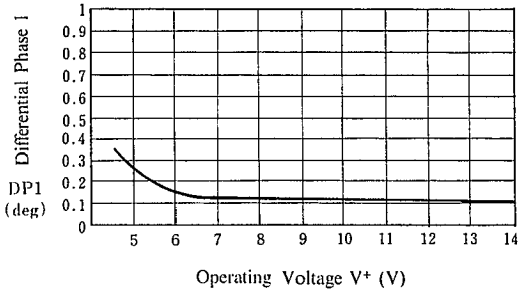


### Offset Voltage 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

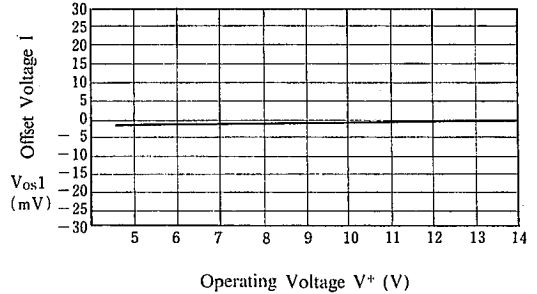


### Switch Change Over 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

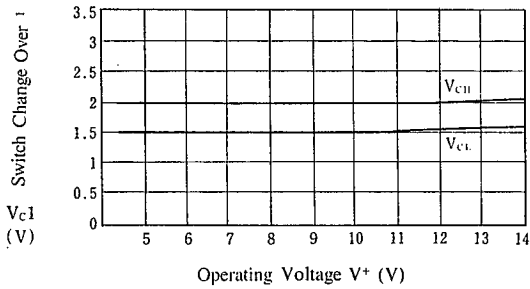

### Crosstalk 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

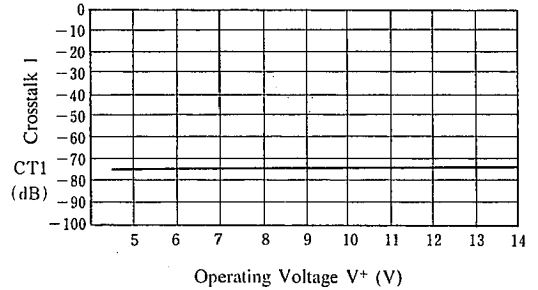




■ TYPICAL CHARACTERISTICS


Crosstalk 2 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

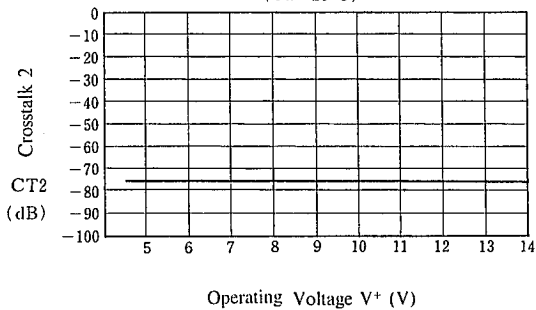


Crosstalk 3 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

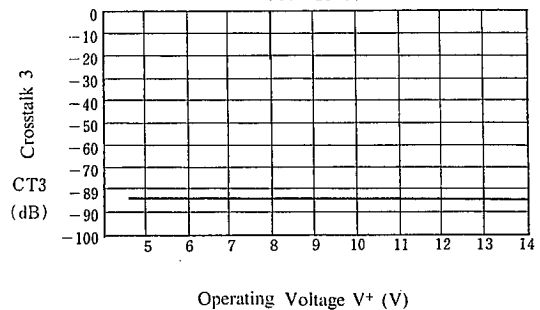


Crosstalk 4 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

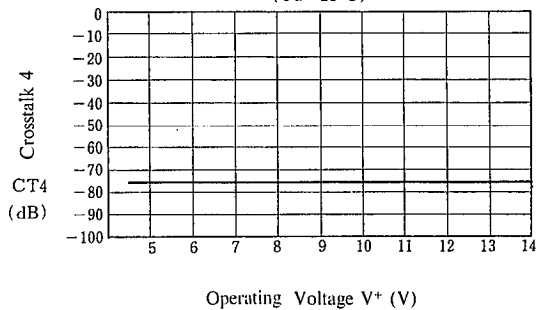


Crosstalk 5 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

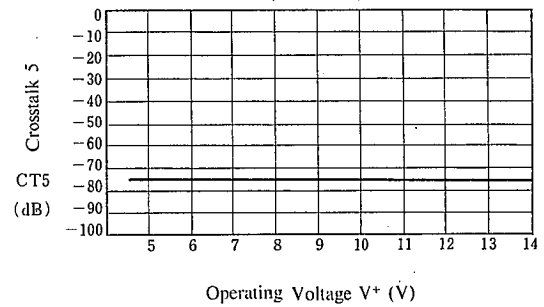


M. Crosstalk 1 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

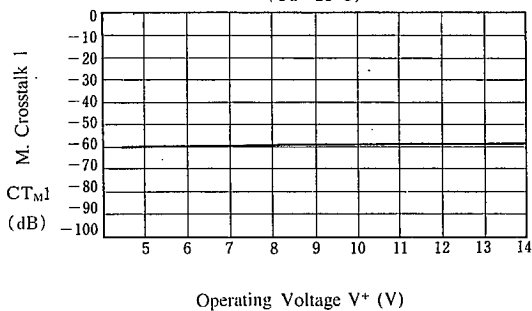


M. Crosstalk 2 vs. Operating Voltage

( $T_a = 25^\circ\text{C}$ )

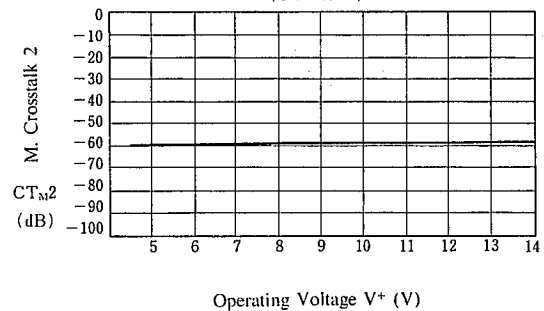


■ TYPICAL CHARACTERISTICS


M. Crosstalk 3 vs. Temperature

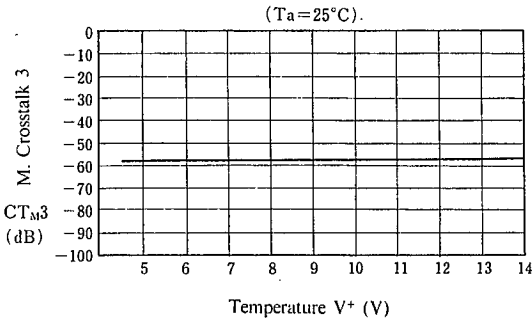


Voltage Gain 1 vs. Frequency

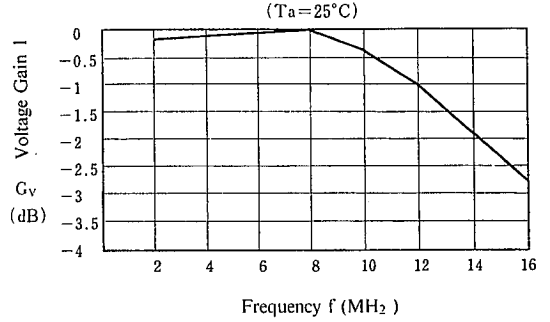


Differential Gain 1 vs. Load Resistor

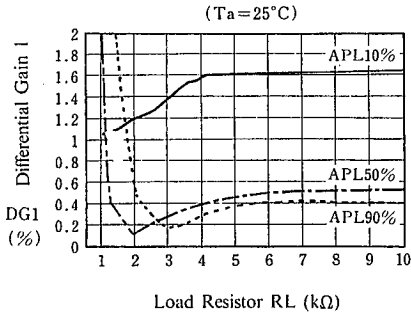


Differential Phase 1 vs. APL

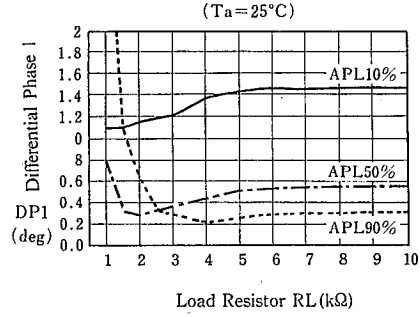

Differential Gain 1 vs. APL

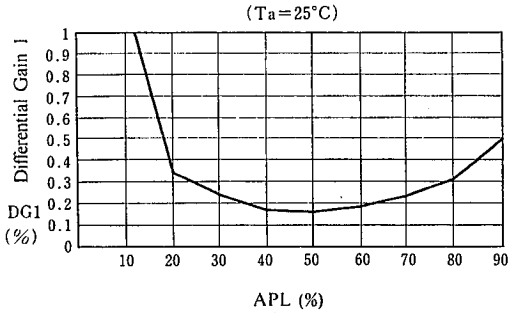

Differential Phase 1 vs. APL

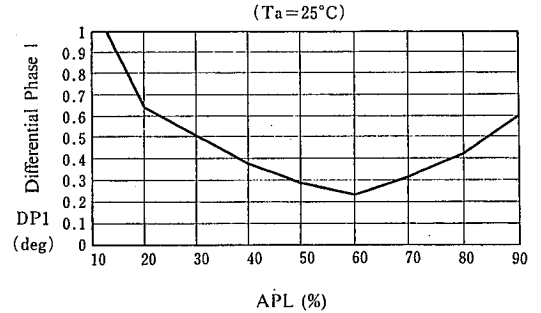


5

■ TYPICAL CHARACTERISTICS

Total Harmonic Distortion 1 vs. Load Resistor

( $T_a=25^\circ\text{C}$ )

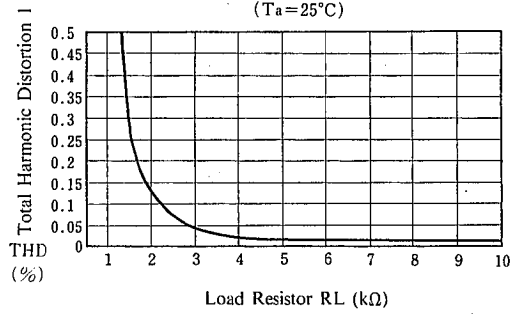

5

## MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.