


MECHANICAL DATA

Dimensions in mm (inches)

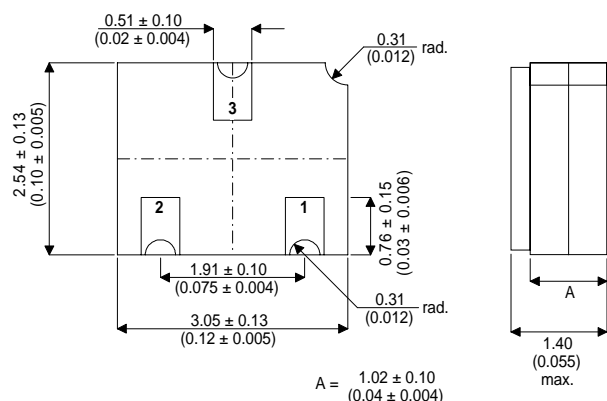

**SCHOTTKY DIODE IN
HERMETIC CERAMIC
SURFACE MOUNT PACKAGE
FOR HIGH RELIABILITY
APPLICATIONS**

**SOT23 CERAMIC
(LCC1 PACKAGE)**

Underside View

PAD 1 — Anode PAD 2 — N/C PAD 3 — Cathode

ABSOLUTE MAXIMUM RATINGS ($T_{MB} = 25^{\circ}\text{C}$ unless otherwise stated)

V_R	Reverse Voltage		30V
I_F	Forward Current ¹	$T_{MB} \leq 25^{\circ}\text{C}$ Derate @ $T_{MB} > 25^{\circ}\text{C}$	200mA See Figure 1
I_{FM}	Peak Forward Current		600mA
T_J	Maximum Operating Junction Temperature		-55 to +135°C
T_{STG}	Storage Temperature Range		-65 to +175°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_R	$V_R = 25\text{V}$			2	μA
	$V_R = 25\text{V}$ $T_A = 85^{\circ}\text{C}$			100	
V_F	$I_F = 1\text{mA}$			0.32	V
	$I_F = 10\text{mA}$			0.40	
	$I_F = 30\text{mA}$			0.50	
C_O	$V_R = 0$ $f = 1\text{MHz}$			10	pF
t_{rr}	$I_F = 100\text{mA}$ to $I_R = 10\text{mA}$ $R_L = 100\Omega$			5	ns

Figure 1 – Power Derating Curve

