

MOS DIGITAL INTEGRATED CIRCUIT **μ PD1937C**

REMOTE CONTROL RECEIVER P-MOS LSI

DESCRIPTION

The μ PD1937C is P-MOS IC for decoding the signal from receiver of remote control system for TV etc.

By using with μ PD1986C which is the transmitter control IC, this IC will provide direct channel selection signal. When μ PC1363C is used as channel selection IC, complete remote control system can be realized. The package is 16 pins plastic dual in-line.

FEATURES


- Capable to receive 27 commands:

| | | |
|-----------------|------------------|--------------|
| Channel 1 - 20 | Channel up, down | Option |
| Volume up, down | Mute on/off | Power on/off |
- Capable to control 5 commands directly:


| | | |
|------------------|-----------------|--------------|
| Channel up, down | Volume up, down | Power on/off |
|------------------|-----------------|--------------|
- Using with μ PC1363C, direct addressing is easily realized.
- Capable to control the volume for 31 steps.

PACKAGE DIMENSIONS

in millimeters (inches)

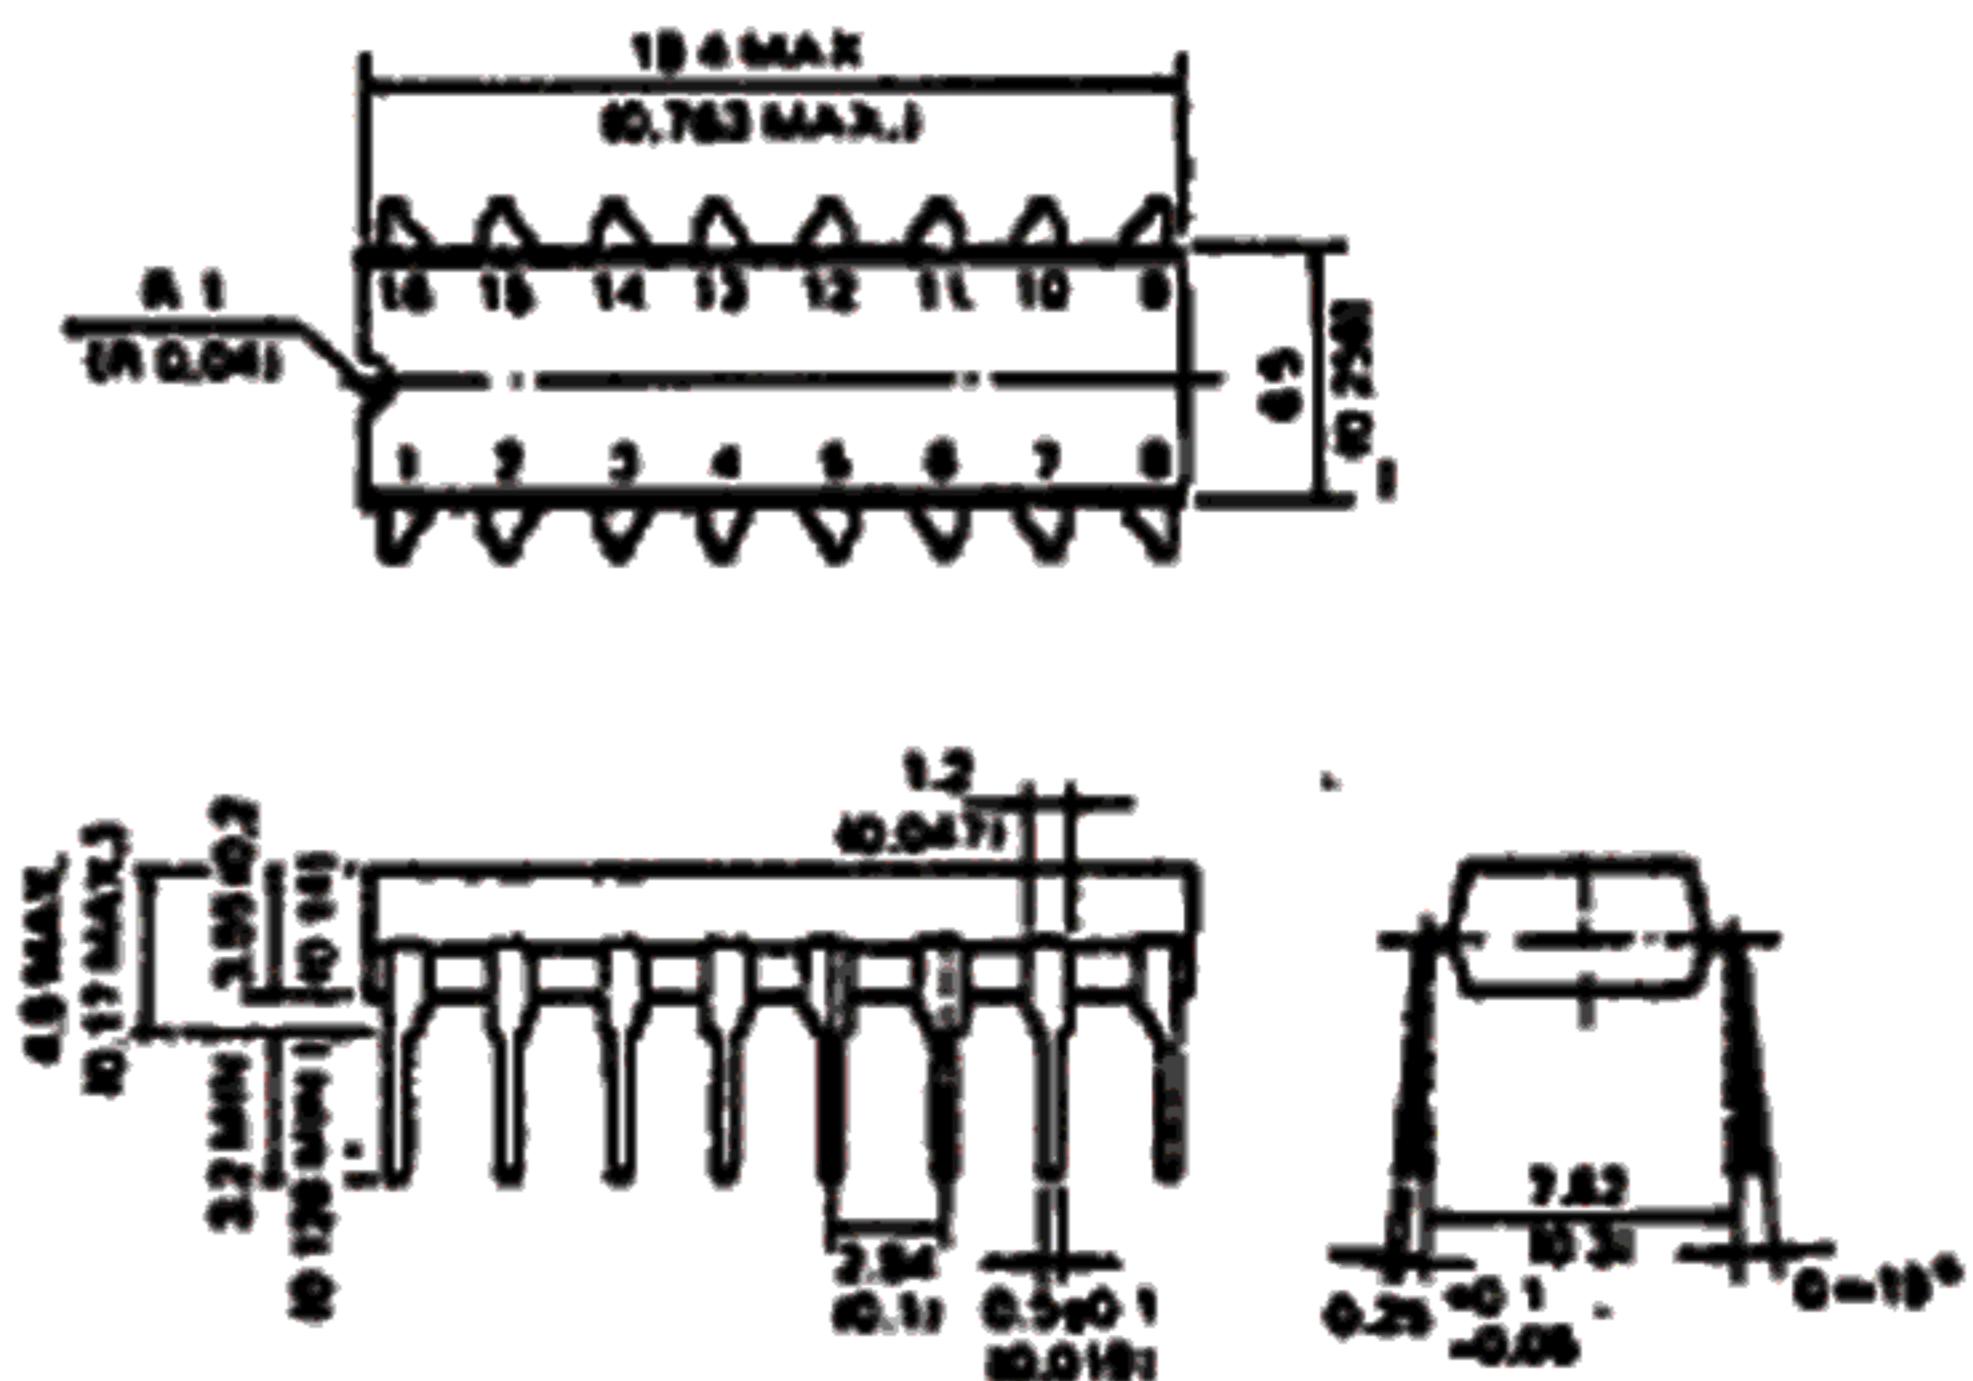

BLOCK DIAGRAM

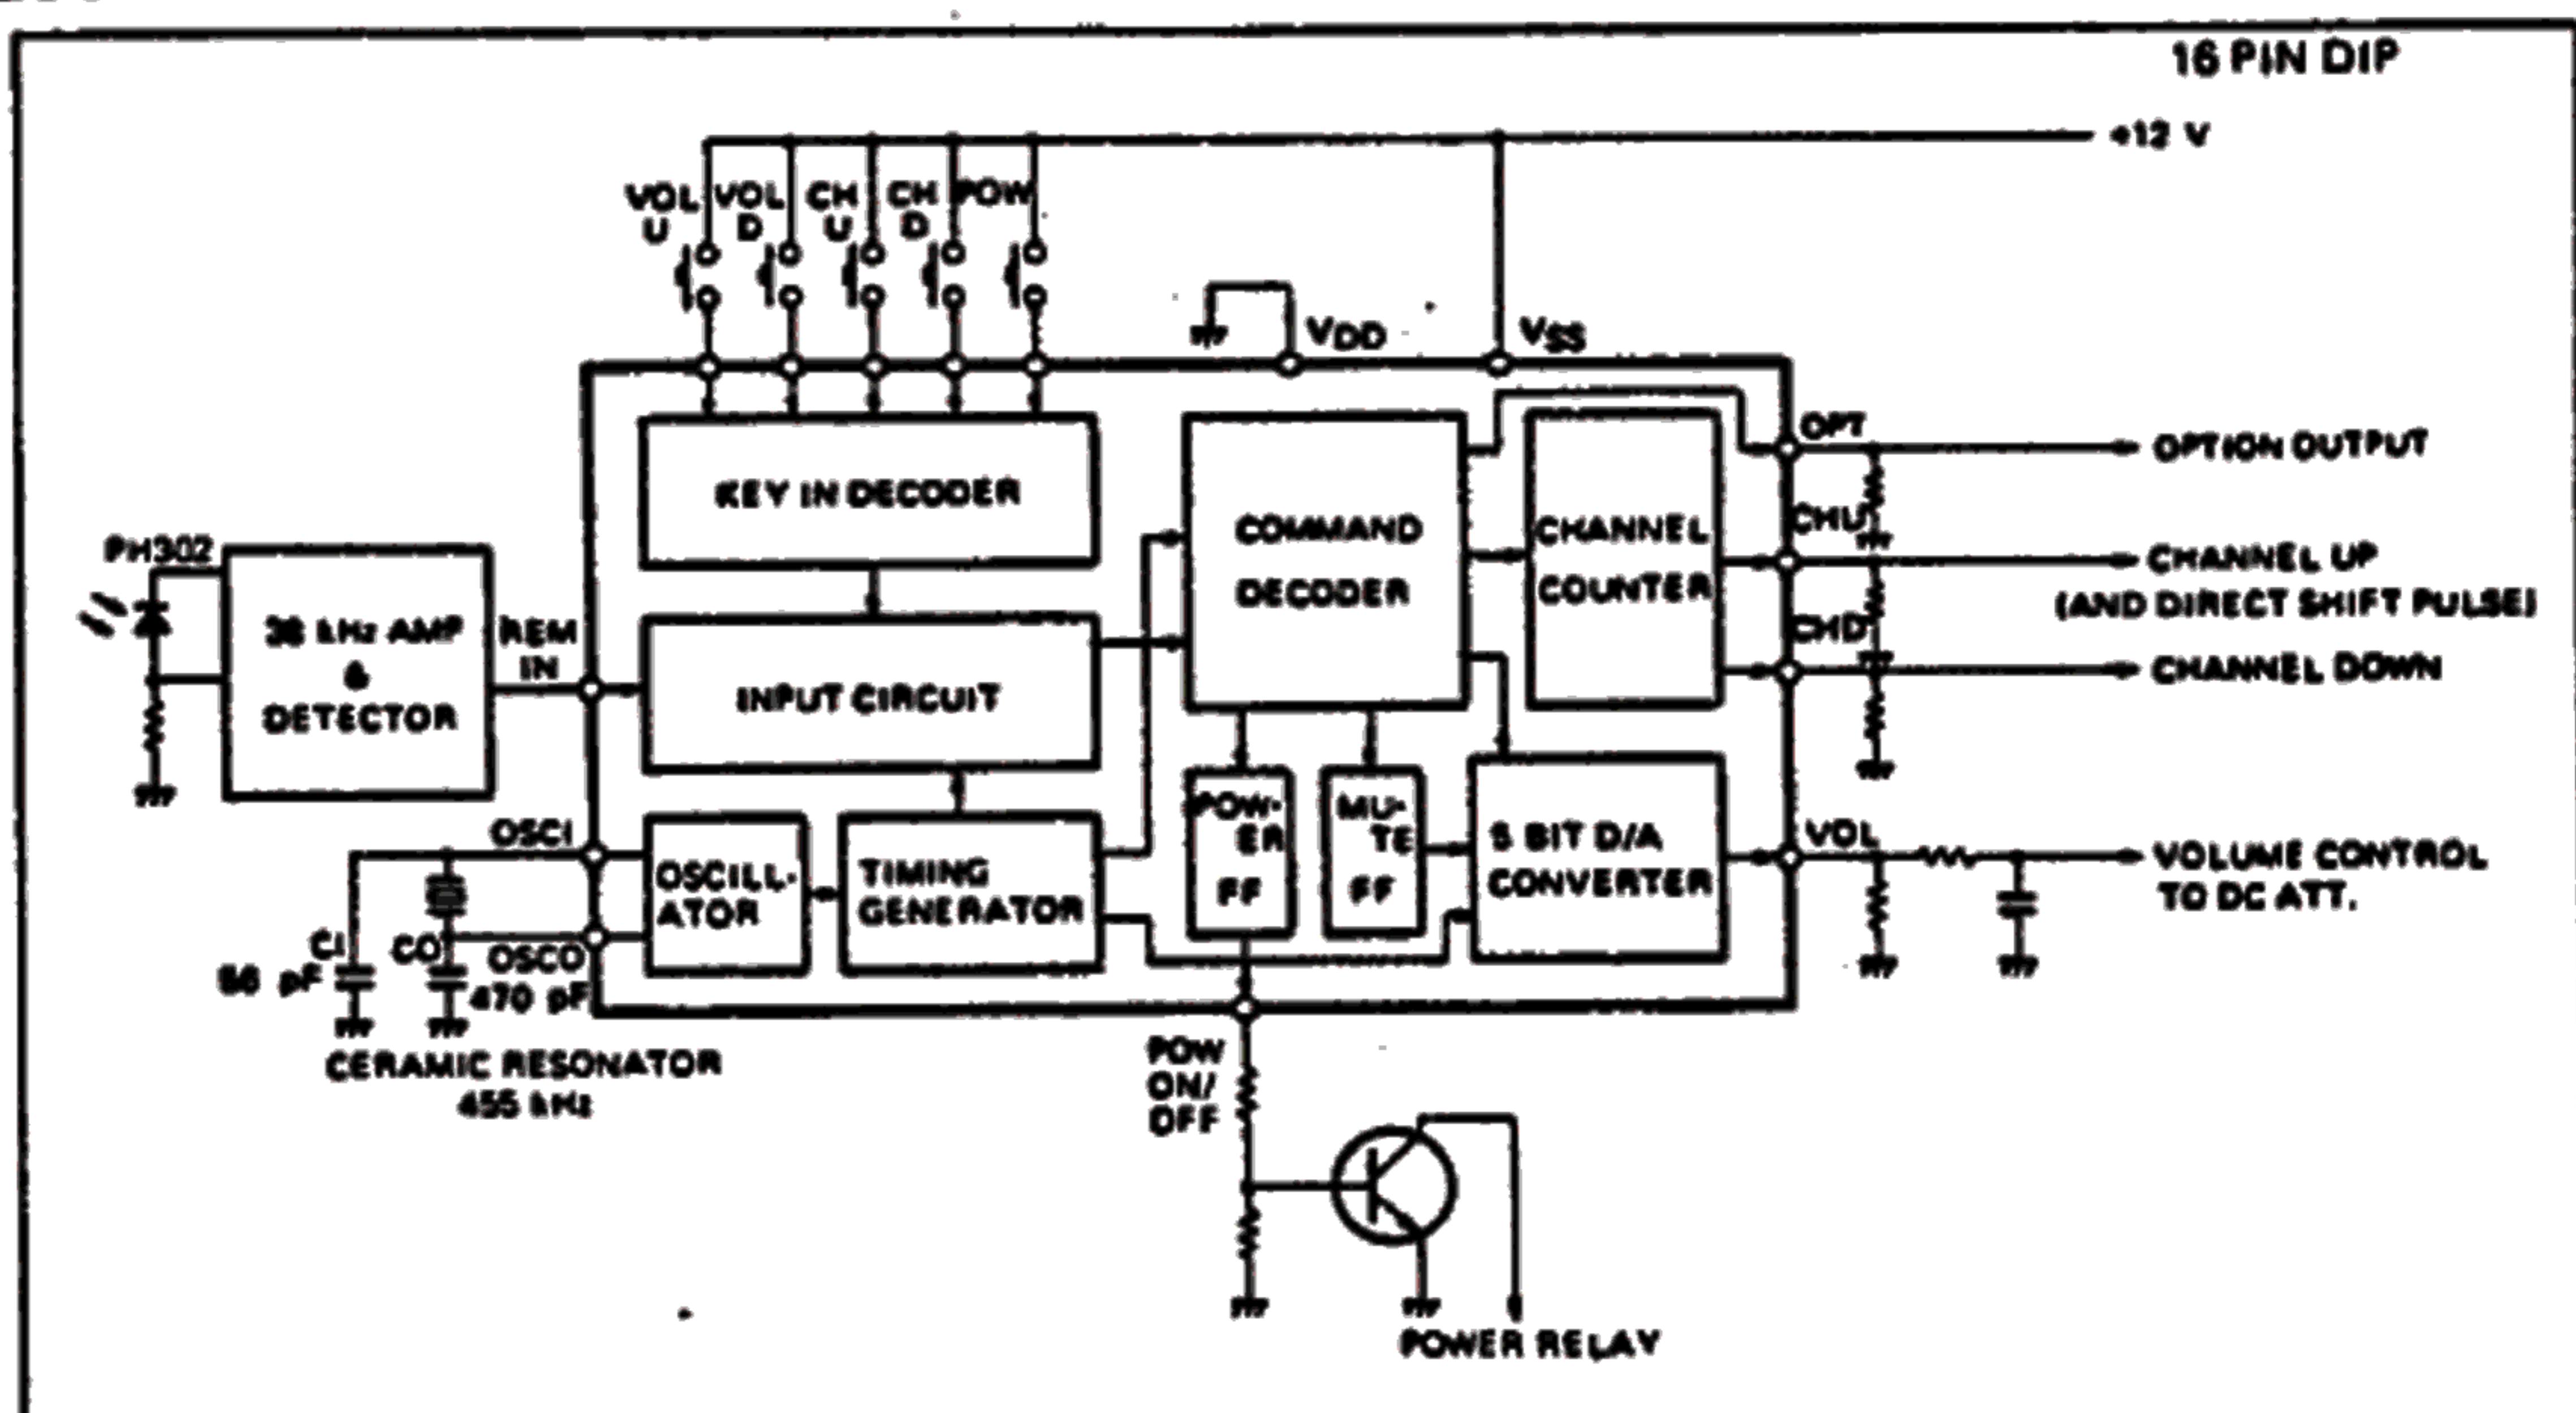

ABSOLUTE MAXIMUM RATINGS (Ta=25 °C)


| | | | |
|-----------------------------|---------------------------------|---------------|----|
| Supply Voltage | VDD-VSS | -15.0 to +0.3 | V |
| Input Voltage | VIN-VSS | -VDD to +0.3 | V |
| Output Current | I _{OH} (CHU, CHD, INI) | -5.0 | mA |
| | I _{OH} (VOL, POW) | -10.0 | mA |
| Power Dissipation | P _d | 360 | mW |
| Operating Temperature Range | T _{opt} | -20 to +75 | °C |
| Storage Temperature Range | T _{stg} | -40 to +125 | °C |

ELECTRICAL CHARACTERISTICS (Ta=-20 to 75 °C, VDD=-9.6 to 14.4 V)

| CHARACTERISTIC | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITIONS |
|-------------------------|--------------------------|------|-------|-------|------|---|
| Supply Voltage | VDD | -9.6 | -12.0 | -14.4 | V | |
| Supply Current | I _{DD} | -4.0 | -10.0 | -20.0 | mA | T _a =25 °C, OSC1=VSS VDD=-12 V |
| Input High Voltage | V _{IH} (1~5,13) | 0 | | -1.5 | V | |
| Input Low Voltage | V _{IL} (1~5,13) | -5.0 | | VDD | V | |
| Input Pull Down Current | I _{IL} (1~5,13) | 5.0 | | 50 | μA | T _a =25 °C, VIN=VSS VDD=-12 V |
| Output High Voltage | V _{OH} (CHU) | | | -2.5 | V | I _{OH} =-1.0 mA |
| Output High Voltage | V _{OH} (CHD) | | | -2.5 | V | I _{OH} =-1.0 mA |
| Output High Voltage | V _{OH} (OPT) | | | -2.5 | V | I _{OH} =-1.0 mA |
| Output High Voltage | V _{OH} (VOL) | | | -2.5 | V | I _{OH} =-5.0 mA |
| Output High Voltage | V _{OH} (POW) | | | -2.5 | V | I _{OH} =-5.0 mA |
| Output Low Current | I _{OL} (1~5,13) | 0 | | 100 | μA | T _a =25 °C, VOL=-11.5 V VDD=-12 V |

μPD1937C


CONNECTION DIAGRAM (Top View)

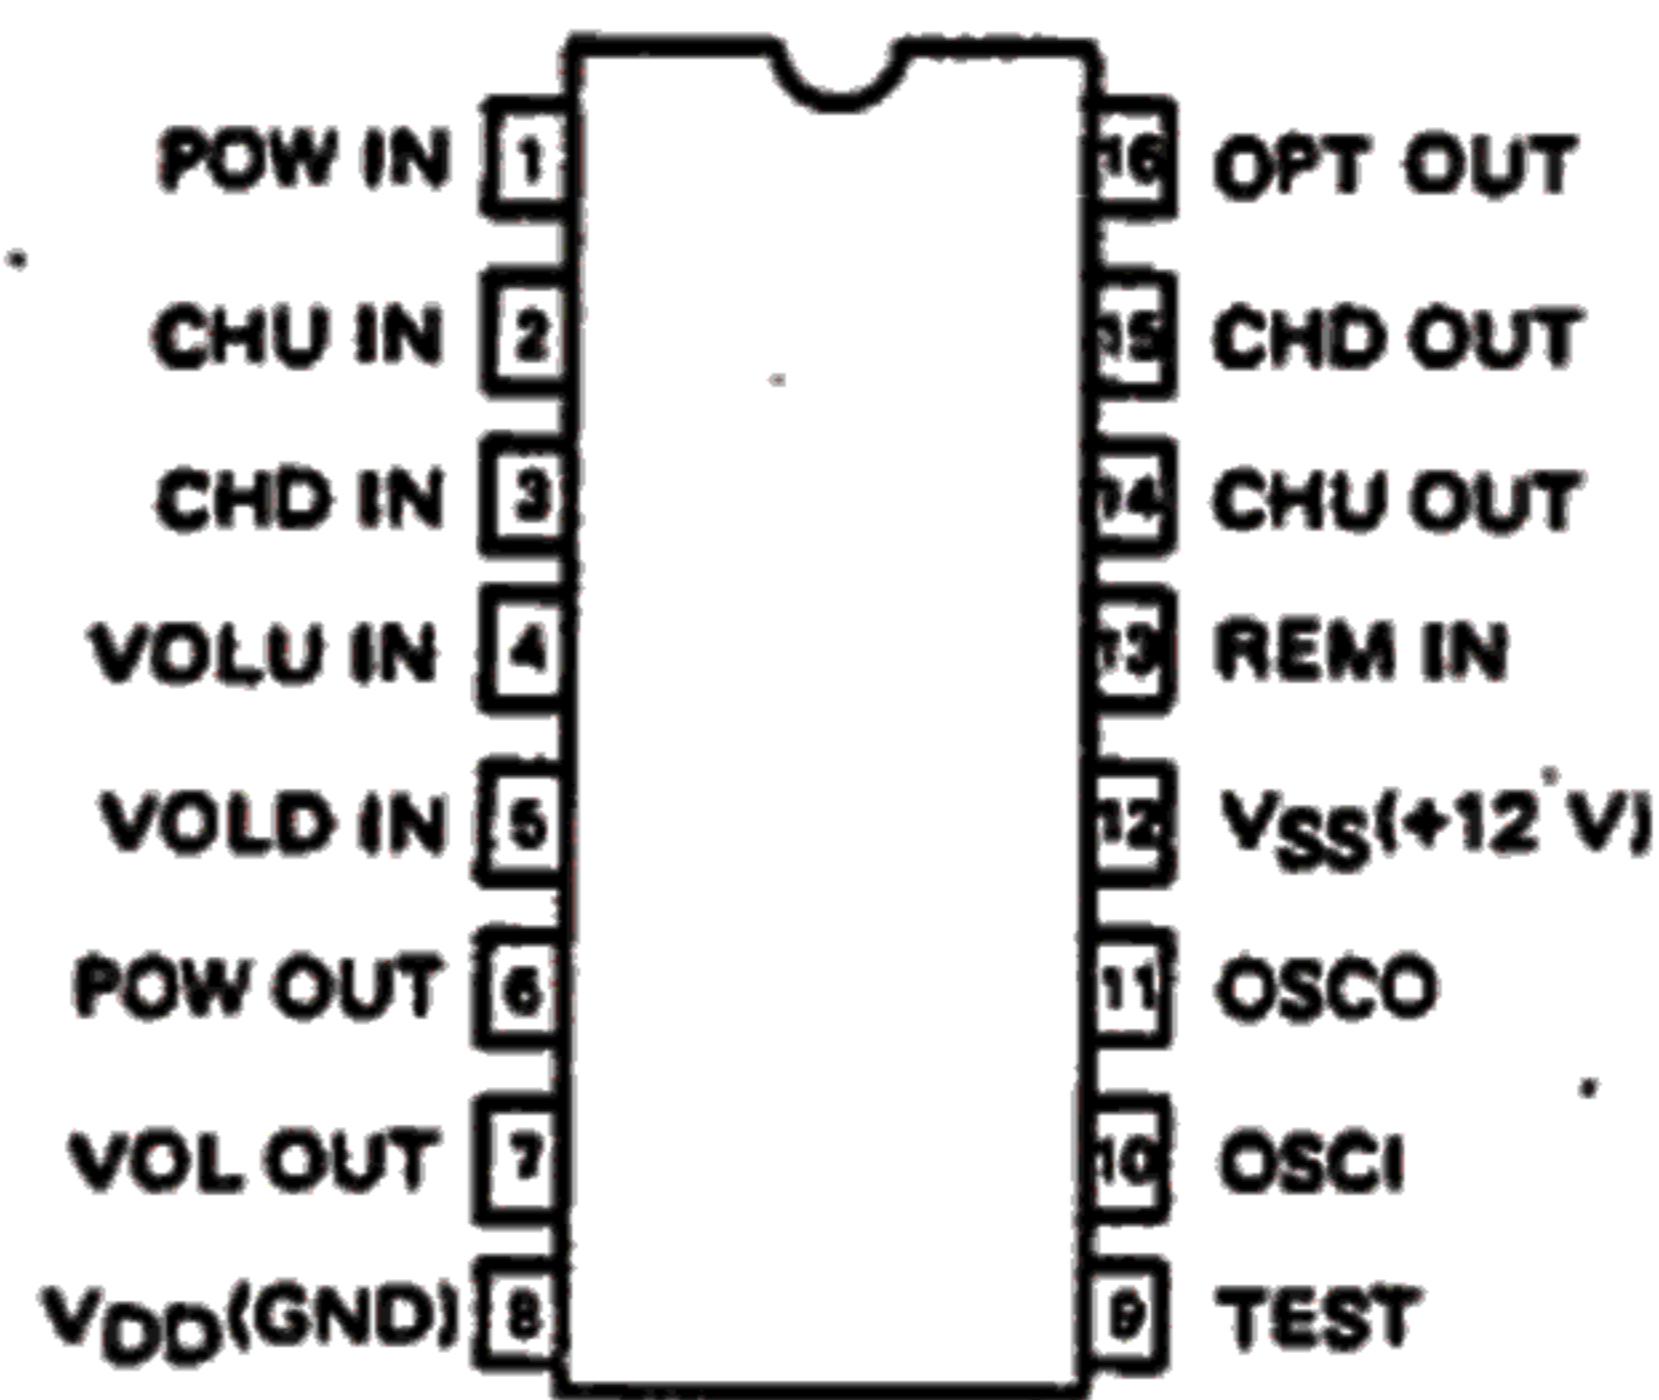

| PIN | FUNCTION | |
|-----|----------|--|
| 8 | VDD | Negative supply GND nominal |
| 12 | VSS | Positive supply +12 V nominal (9.6~14.4 V) |
| 10 | OSCI | Oscillator Input |
| 11 | OSCO | Oscillator Output |
| 13 | REM IN | Remote Signal Input |
| 1 | POW IN | Power ON/OFF Key Input |
| 2 | CHU IN | Channel Up Key Input |
| 3 | CHD IN | Channel Down Key Input |
| 4 | VOLU IN | Volume Up Key Input |
| 5 | VOLD IN | Volume Down Key Input |
| 6 | VOL OUT | Volume Output This output is in the form of a pulse. Connect to CR filter. |
| 7 | POW OUT | Power ON/OFF Output |
| 14 | CHU OUT | Channel Up Pulse Output and Direct Channel Shift Pulse |
| 15 | CHD OUT | Channel Down Pulse Output |
| 16 | OPT OUT | Option Output for free use. |

1) CHANNEL SELECTION OUTPUT

- Direct Channel Operation

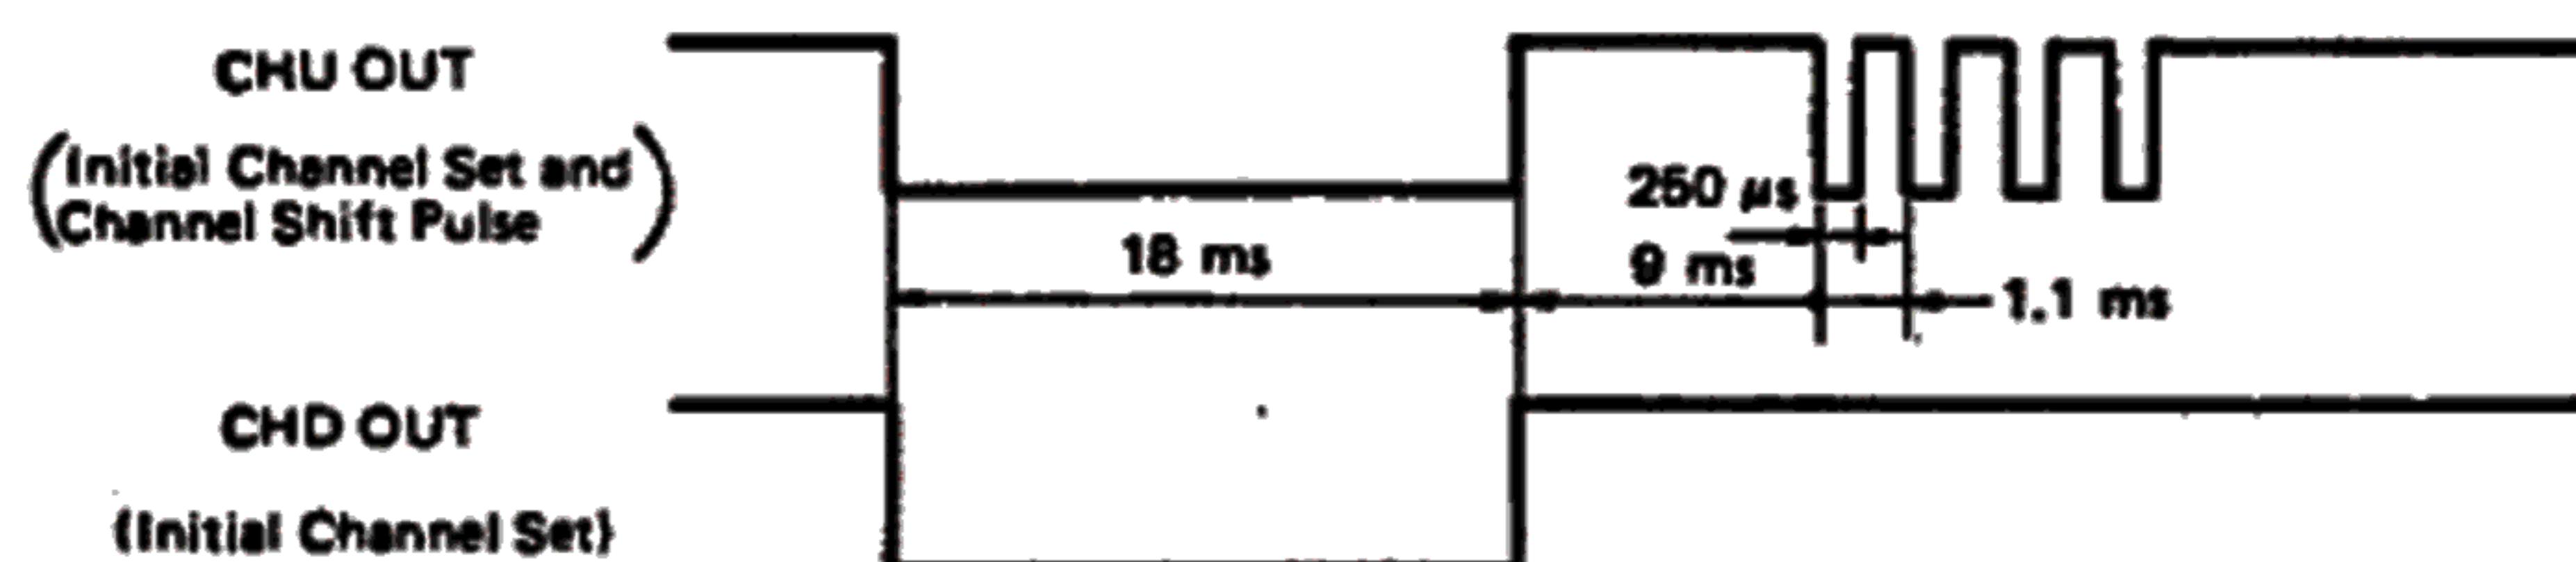


shift pulse = CH number - 1 MAX, 19


- UP, DOWN Channel Operation



2) VOLUME OUTPUT

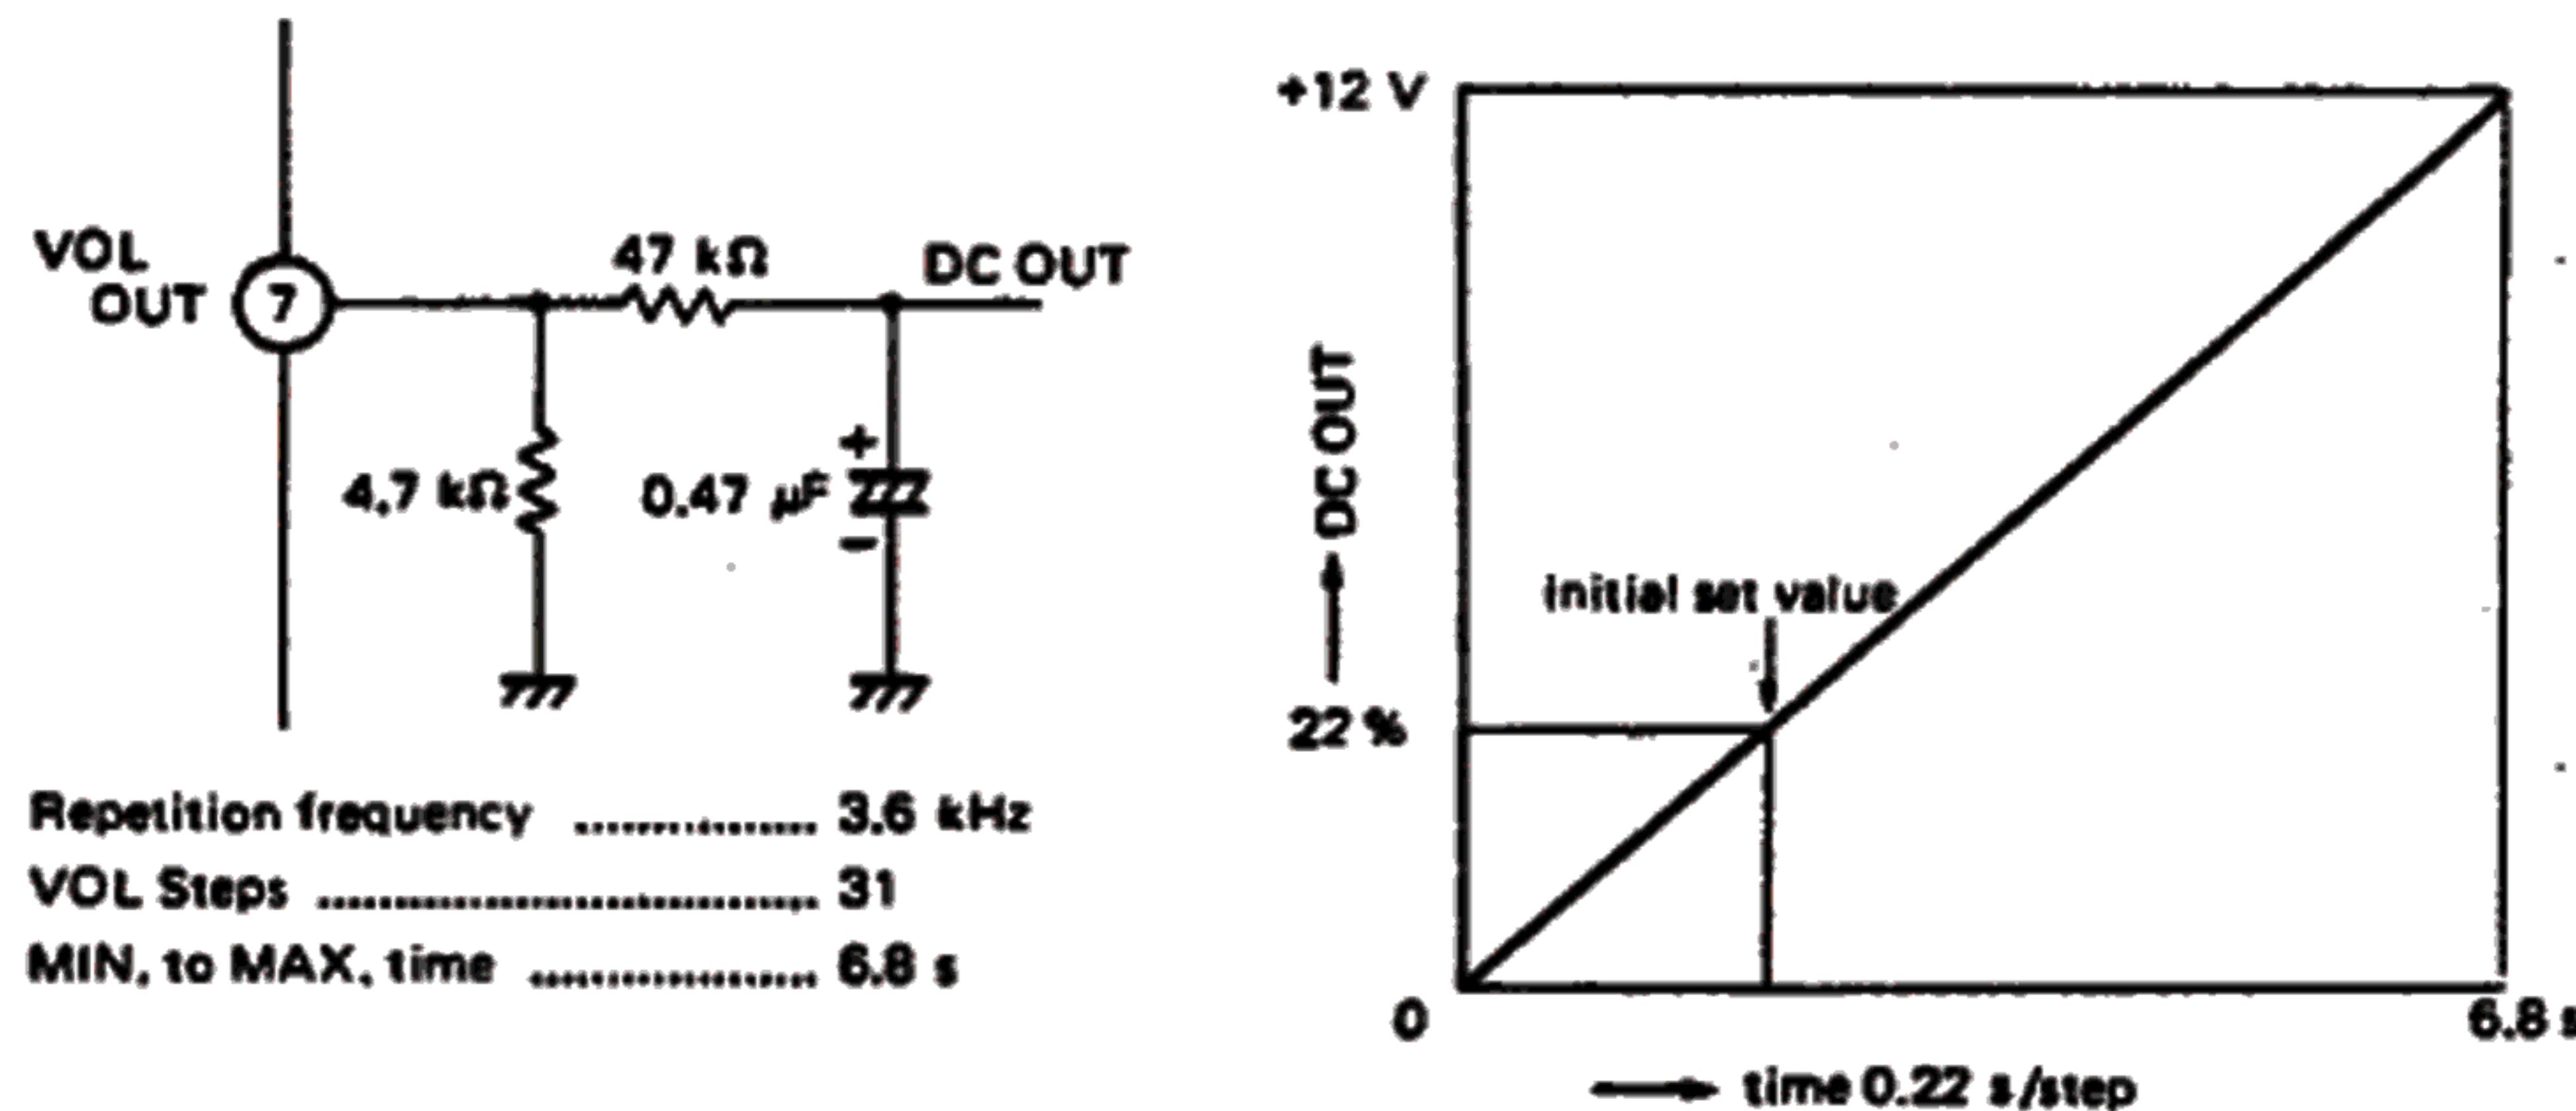


EXAMPLE OF INPUT AMP CIRCUIT

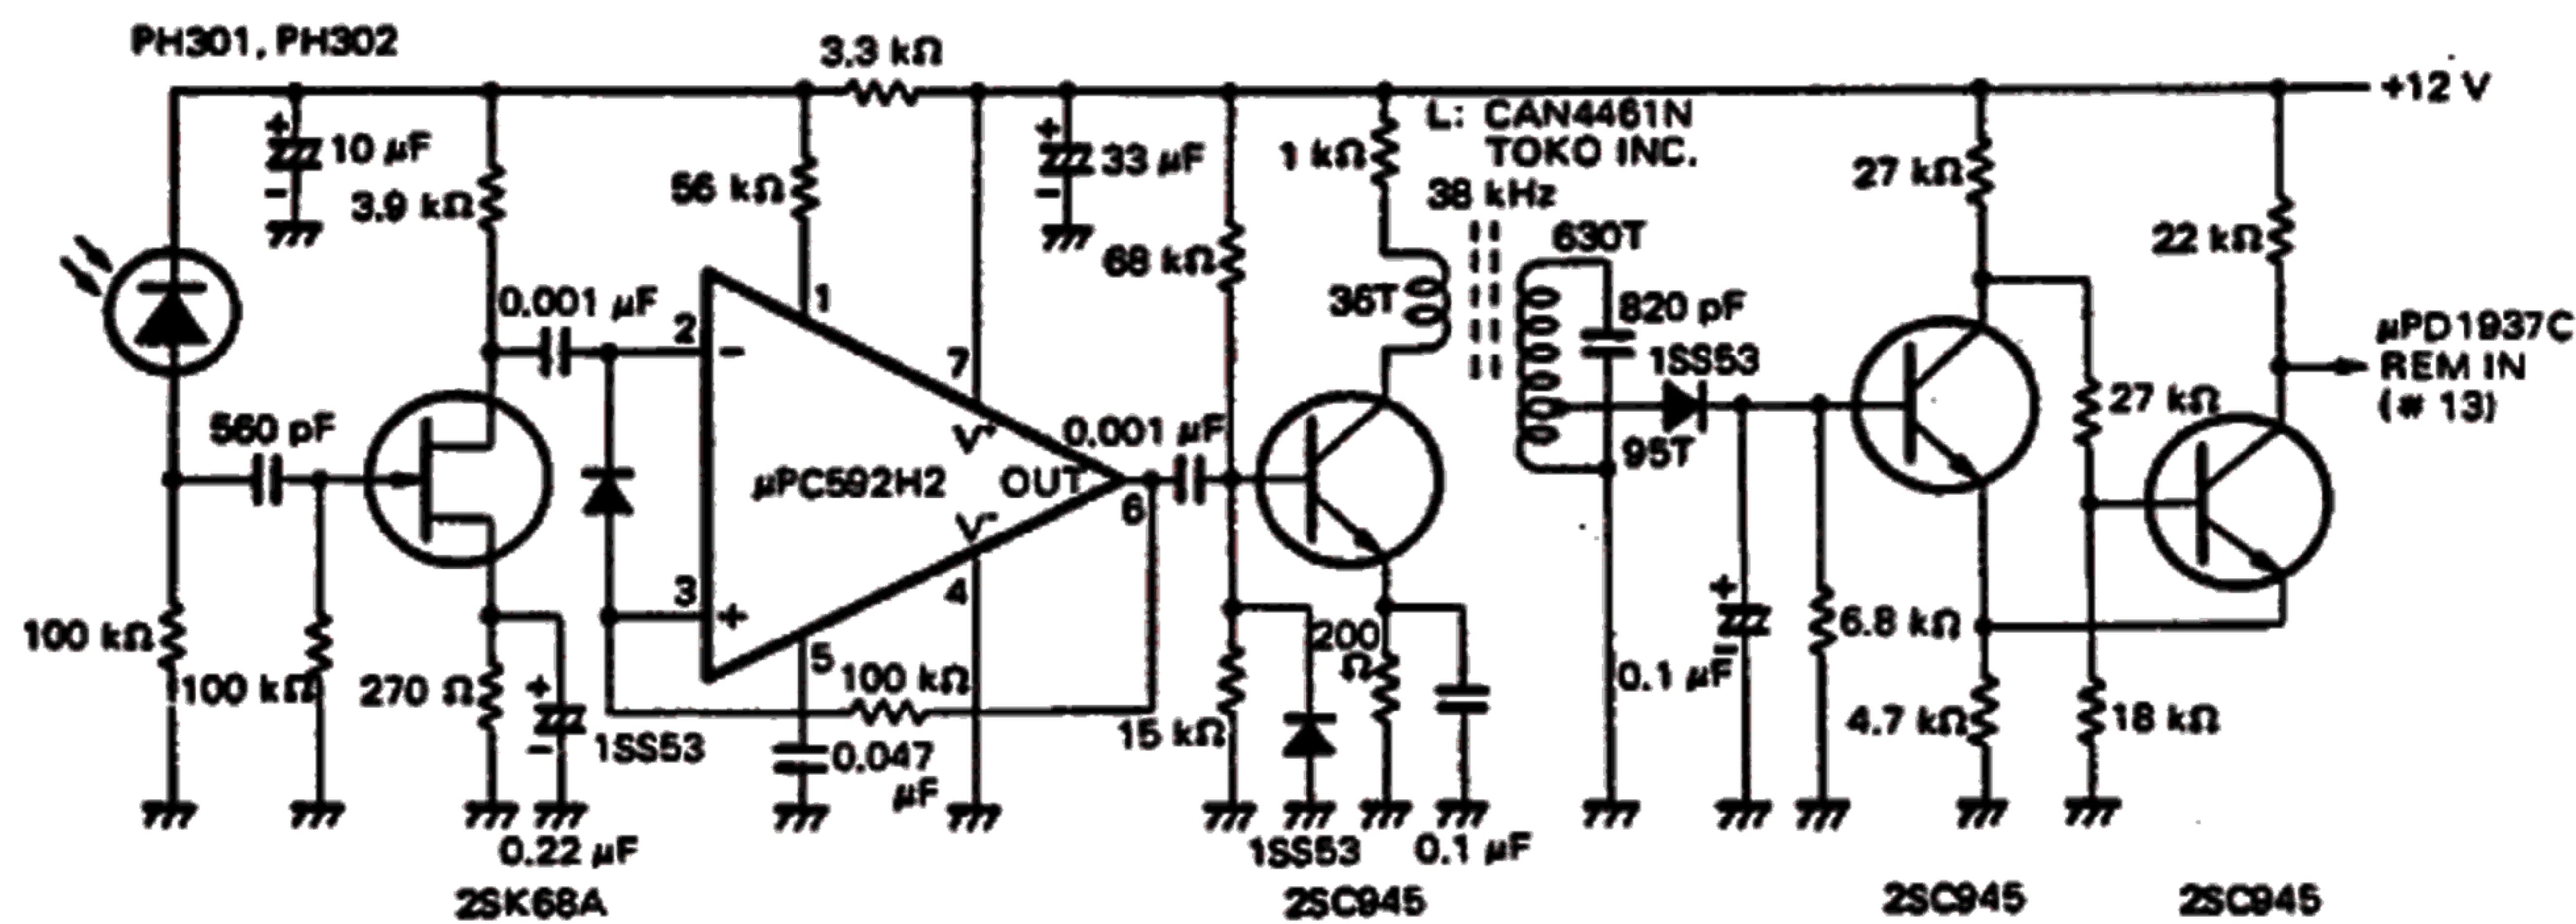

μ PD1937C

OUTPUT WAVE FORM

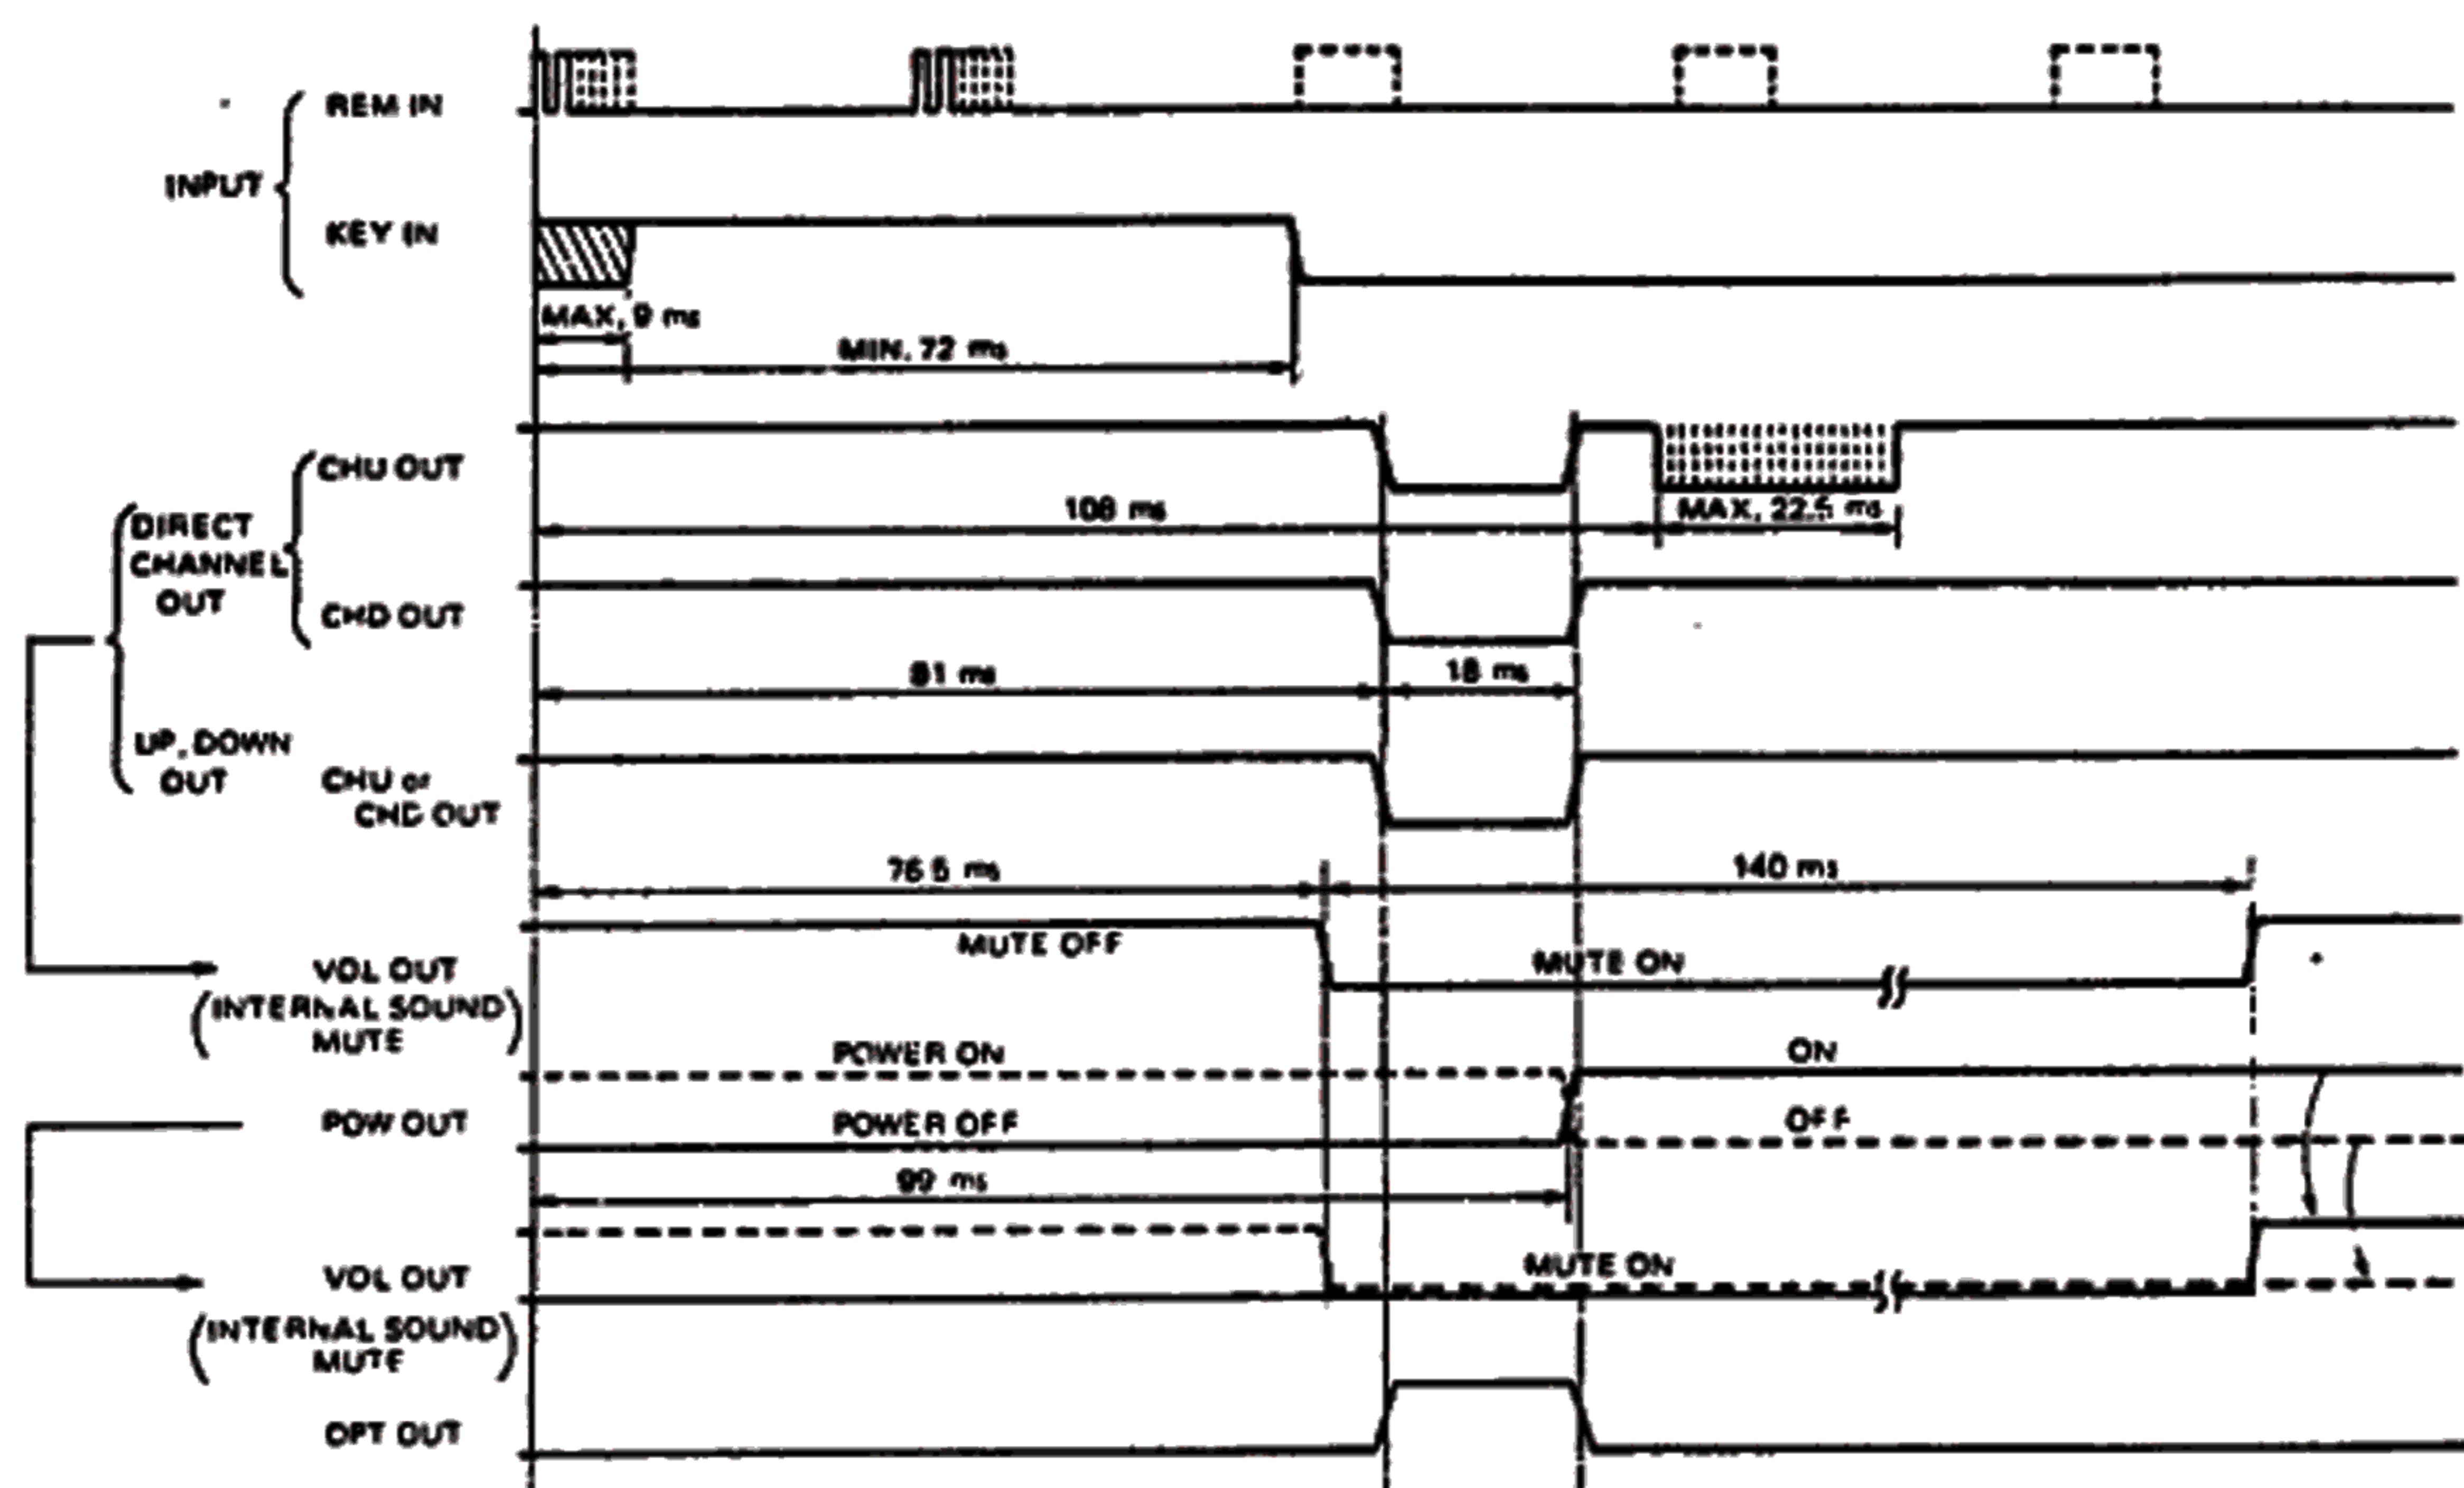

APPLICATION CIRCUIT

EXAMPLE OF TV REMOTE CONTROL
TUNNING SYSTEM USING PH302,
 μ PD1937C and μ PC1363C.

