





# PRODUCT SPECIFICATION

**COSMO**  
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:  
**KAQW210TSB**



SHEET 1 OF 10

- OUTSIDE DIMENSION :

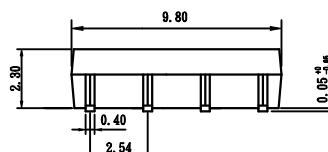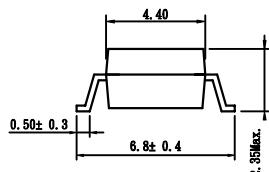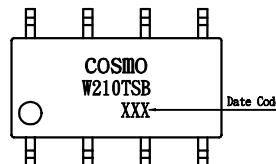

Unit:mm  
Tolerance:± 0.2 mm

- Turn on/Turn off time

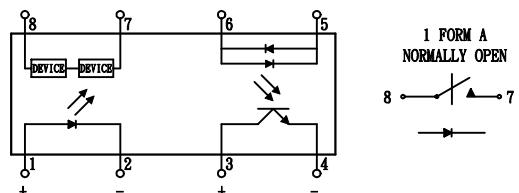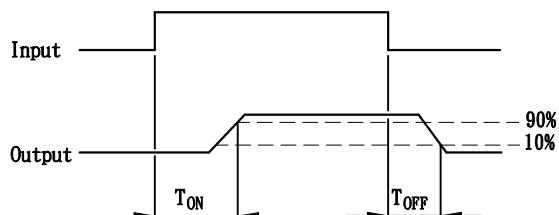

**Absolute Maximum Ratings ( $T_A=25^\circ C$ )**

**Emitter (Input)**

Reverse Voltage . . . . .	5.0V
Continuous Forward Current . . . . .	50mA
Peak Forward Current (1s) . . . . .	1A
Power Dissipation. . . . .	100mW
Derate Linearly from 25° C . . . . .	1.3mW/° C

**Detector (Output)**

Output Breakdown Voltage . . . . .	± 350V
Continous Load Current . . . . .	± 130mA
Power Dissipation . . . . .	500mW

**General Characteristics**

Isolation Test Voltage. . . . .	1500VAC <sub>RMS</sub>
Isolation Resistance	

$V_{IO} = 500V, T_A = 25^\circ C$ . . . . .	$\geq 10^{10} \Omega$
Total Power Dissipation . . . . .	550mW

Derate Linearly form 25° C . . . . .	2.5mW/° C
Storage Temperature Range . . . . .	-40 to +150° C
Operating Temperature Range. . . . .	-40 to +85° C
Junction Temperature . . . . .	100° C
Soldering Temperature, 2mm from case, 10 sec.	260° C

# PRODUCT SPECIFICATION

<b>COSMO</b> ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: <b>KAQW210TSB</b>	SHEET 2 OF 10
---------------------------------------	--	---------------

## Characteristics

( $T_A = 25^\circ C$ )

Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
<b>Emitter (Input)</b>						
Forward Voltage	$V_F$		1.2	1.5	V	$I_F = 10mA$
Operation Input Current	$I_{FON}$			5	mA	$V_L = \pm 20V, I_L = 100mA, t = 10 ms$
Recovery Input Current	$I_{FOFF}$	0.05			mA	$V_L = \pm 20V, I_L = < 5\mu A$
<b>Deterctor (Output)</b>						
Output Breakdown Voltage	$V_B$	350			V	$I_B = 50\mu A$
Output Off-State Leakage	$I_{TOFF}$		0.7	2	$\mu A$	$V_T = 100V, I_F = 0mA$
I/O Capacitance	$C_{ISO}$		6		pF	$I_F = 0, f = 1MHz$
ON Resistance	$R_{ON}$		28	35	$\Omega$	$I_L = 100mA, I_F = 10mA$
Turn-on Time	$T_{ON}$		0.1	0.5	ms	$I_F = 10mA, V_L = \pm 20V$
Turn-off Time	$T_{OFF}$		0.3	0.5	ms	$t = 10ms, I_L = \pm 100mA$

Mos Relay Schematic and Wiring Diagrams						
Type	Schematic	Output configuration	Load	Con-nection	Wiring diagram	
KAQW210TSB	 1a	AC/DC	-		 	

# PRODUCT SPECIFICATION


**COSMO**  
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:  
**KAQW210TSB**


SHEET 3 OF 10

## DATA CURVE


Load current vs. ambient temperature  
Allowable ambient temperature:  
 $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

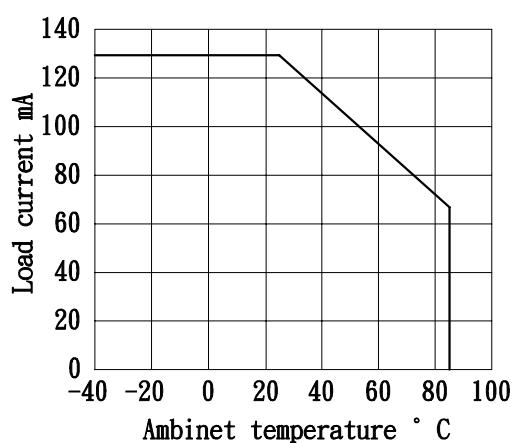


On resistance vs. ambient temperature  
Across terminals 7 and 8 pin  
LED current: 5mA  
Continuous load current: 130 mA(DC)

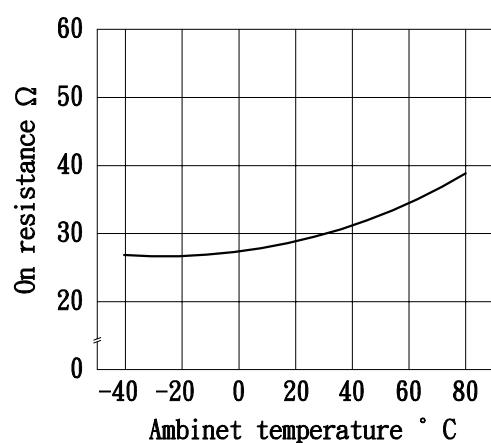

Turn on time vs. ambient temperature  
Load voltage 350 V(DC)  
LED current : 5mA  
Continuous load current: 130mA(DC)

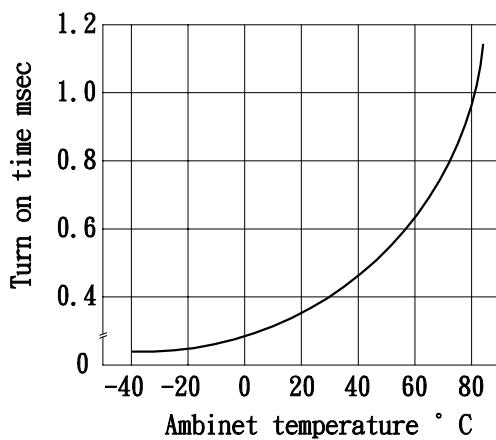

Turn off time vs. ambient temperature  
LED current: 5mA; Load voltage: 350V(DC)  
Continuous load current: 130mA(DC)

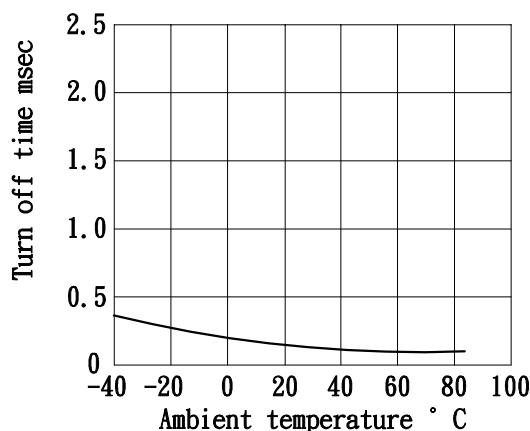


# PRODUCT SPECIFICATION

<b>COSMO</b> ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: <b>KAQW210TSB</b>	SHEET 4 OF 10
---------------------------------------	--	---------------


LED operate vs. ambient temperature  
Load voltage: 350V(DC)

Continuous load current: 130mA(DC)

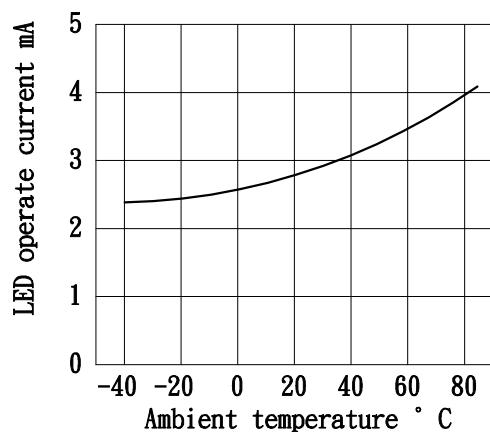


LED turn off current vs. ambient temperature  
Load voltage: 350V(DC)

Continuous load current: 130mA(DC)

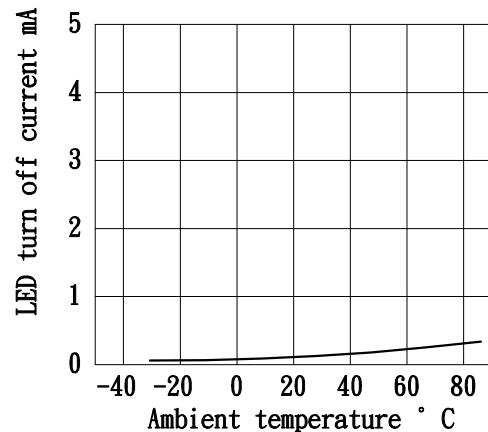

LED dropout voltage vs. ambient temperature


LED current: 5 to 50mA

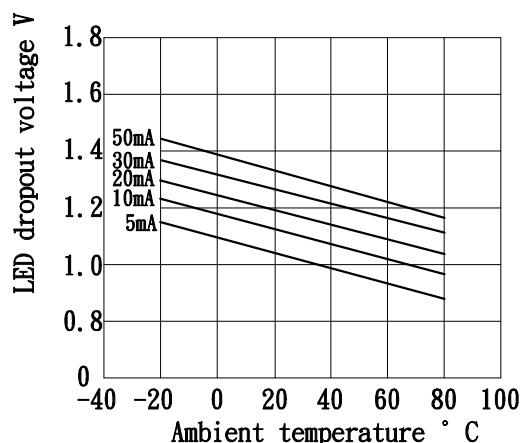

Voltage vs. current characteristics of output at MOS FET portion

Measured portion: across terminals 7 and 8 pin

Ambient temperature: 25° C

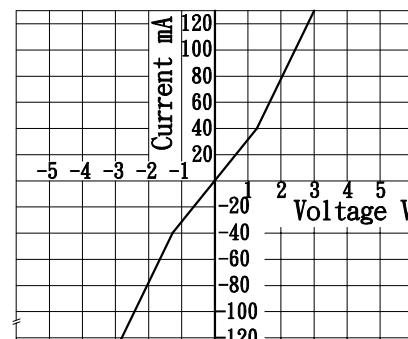


# PRODUCT SPECIFICATION

**COSMO**  
ELECTRONICS CO., LTD.


PHOTO MOS RELAYS:  
**KAQW210TSB**

SHEET 5 OF 10


LED forward current vs. turn on time  
Across terminals 7 and 8pin; Load voltage: 350V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25° C

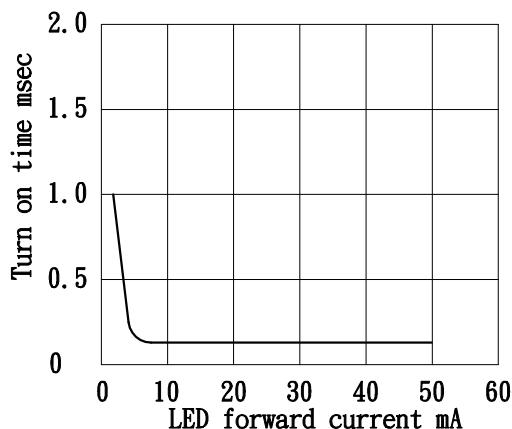


Off state leakage current  
Across terminals 7 and 8pin  
Ambient temperature: 25° C

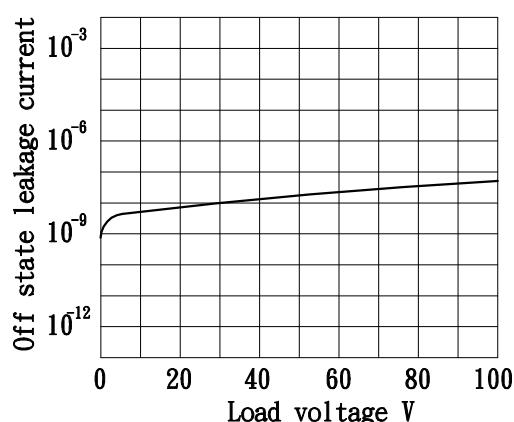

LED forward current vs. turn off time  
Across terminals 7 and 8pin; Load voltage: 350V(DC); Continuous load current: 130 mA(DC); Ambient temperature: 25° C

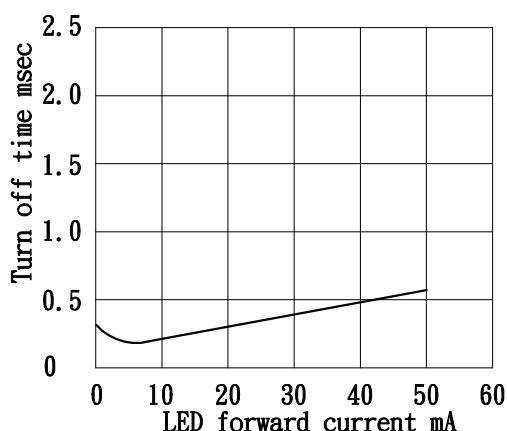

Applied voltage vs. output capacitance  
Across terminals 7 and 8pin  
Frequency: 1MHz; Ambient temperature: 25° C

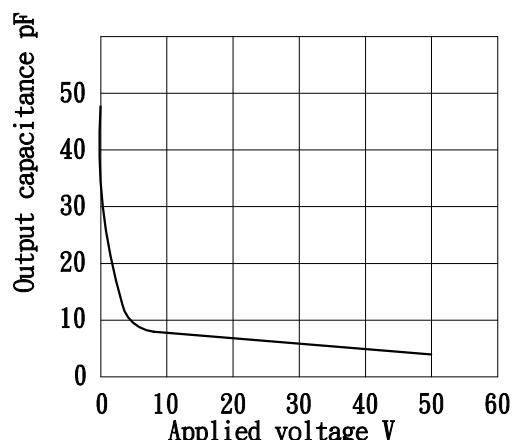

# PRODUCT SPECIFICATION

**COSMO**  
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:  
**KAQW210TSB**


SHEET 6 OF 10

## USING METHODS

Examples of resistance value to control LED forward current  $I_F$


Photo MOSRELAY

( $I_F = 5\text{mA}$ )

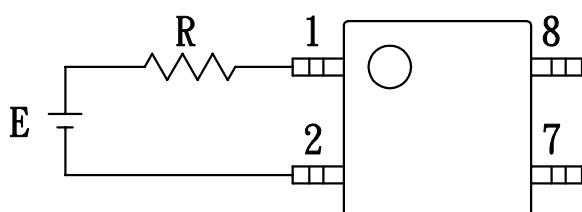

E	R
3. 3V	Approx. 240 ohm
5V	Approx. 540 ohm
12V	Approx. 1. 8K ohm
15V	Approx. 2. 4K ohm
24V	Approx. 4K ohm

- (1) LED forward current must be more than 5mA, at E min.
- (2) LED forward current must be less than 50mA, at E max.

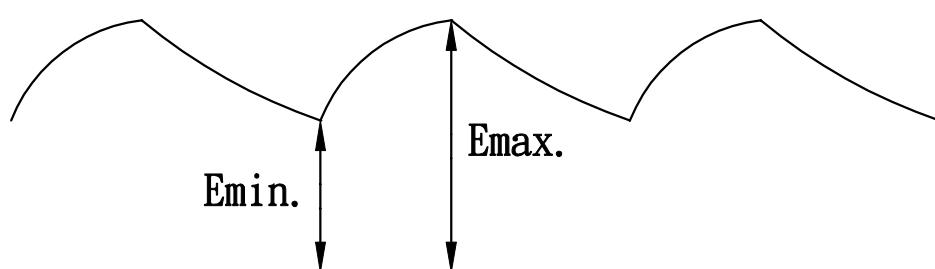

# PRODUCT SPECIFICATION



**COSMO**  
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:  
**KAQW210TSB**

SHEET 7 OF 10

## USING METHODS

Regulate the spike voltage generated on the inductive load as follows

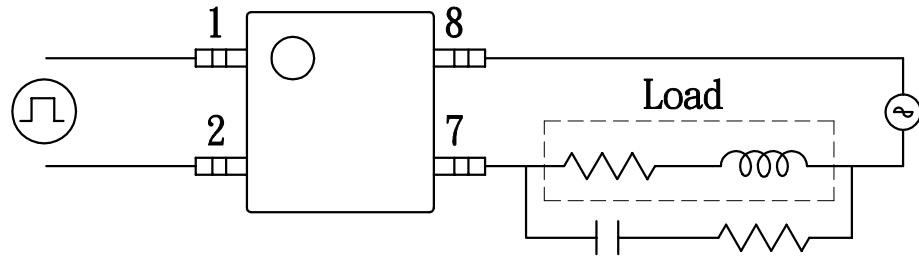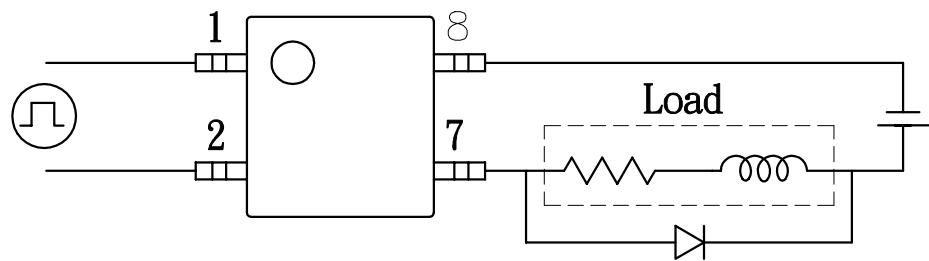

R-C Snubber

# PRODUCT SPECIFICATION

<b>COSMO</b> ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: <b>KAQW210TSB</b>	SHEET 8 OF 10
---------------------------------------	--	---------------

- Absolute Maximum Ratings

(Ta=25°C)


Parameter		Symbol	Rating	Unit
Input	Forward current	IF	± 50	mA
	Peak forward current	IFM	± 1	A
	Power dissipation	PD	70	mW
Output	Collector-emitter voltage	VCEO	60	V
	Emitter-collector voltage	VECO	6	V
	Collector current	Ic	50	mA
	Collector power dissipation	Pc	150	mW
Total power dissipation		Ptot	200	mW
Isolation voltage 1 minute		Viso	3750	Vrms
Operating temperature		Topr	-30 to +100	° C
Storage temperature		Tstg	-55 to +125	° C
Soldering temperature 10 second		Tsol	260	° C

- Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	VF	IF=± 20mA	-	1.2	1.4	V
	Peak forward voltage	VFM	IFM =± 0.5A	-	-	3.5	V
	Terminal capacitance	Ct	V=0, f=1kHz	-	30	-	pF
Output	Collector dark current	ICBO	VCE=20V, IF=0	-	-	0.1	uA
	Current transfer ratio	CTR	IF=± 1mA, VCE=5V	30	100	-	%
	Collector-emitter saturation voltage	VCE(sat)	IF=± 20mA, IC=1mA	-	0.1	0.3	V
	Isolation resistance	Riso	DC500V	5x10 <sup>10</sup>	10 <sup>11</sup>	-	ohm
Transfer characteristics	Floating capacitance	Cf	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency	fc	Vcc=5V, IC=2mA, RL=100ohm	-	80	-	kHz
	Response time (Rise)	tr	Vcc=2V, IC=2mA, RL=100ohm	-	5	20	us
	Response time (Fall)	tf		-	4	20	us

Fig. 1 Current Transfer Ratio vs.  
Forward Current

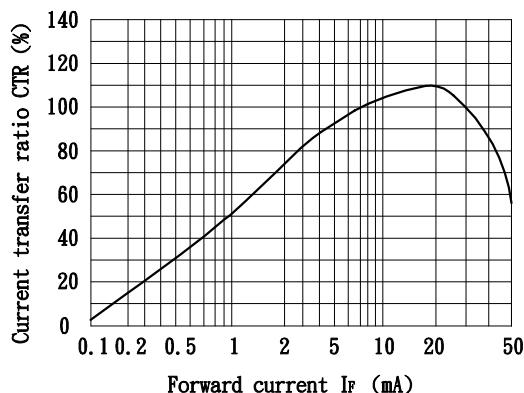


# PRODUCT SPECIFICATION

**COSMO**  
ELECTRONICS CO., LTD.


PHOTO-SMOS RELAYS:  
**KAQW210TSB**

SHEET 9 OF 10


**Fig. 2 Collector Power Dissipation vs. Ambient Temperature**

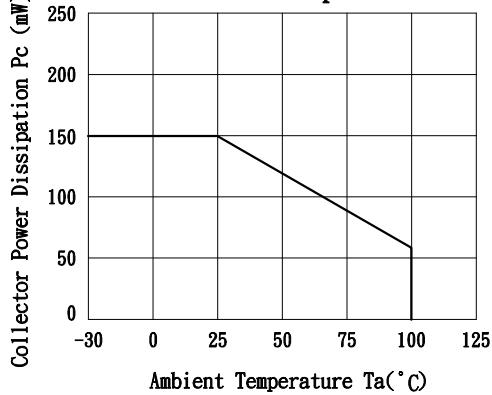


**Fig. 4 Forward Current vs. Ambient Temperature**

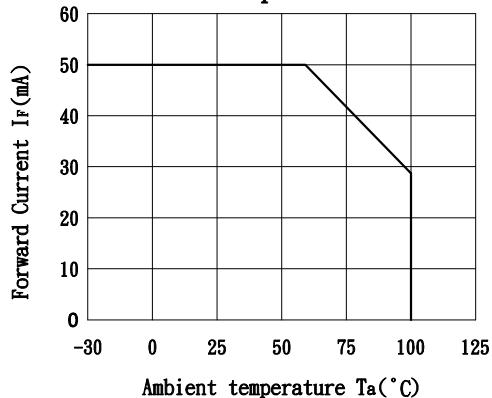


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

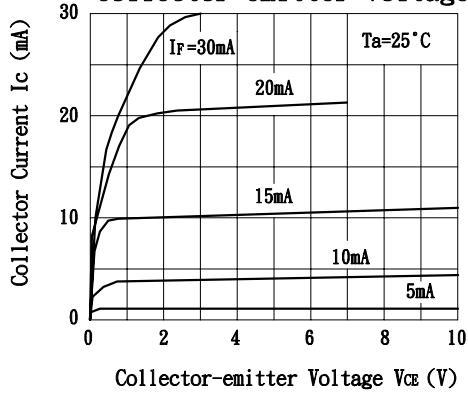


**Fig. 3 Collector Dark Current vs. Ambient Temperature**

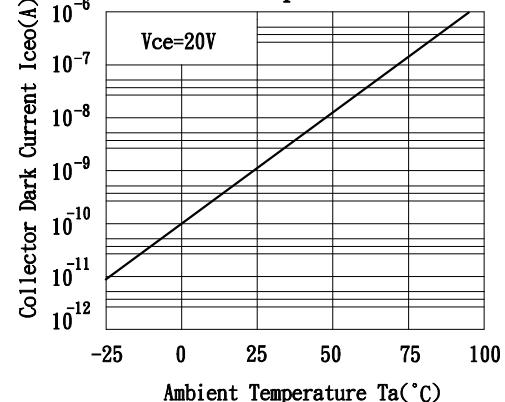

**Fig. 5 Forward Current vs. Forward Voltage**

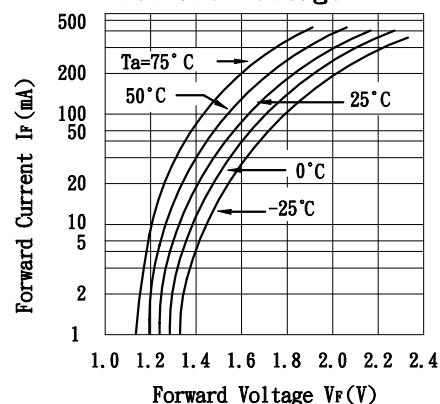

**Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature**

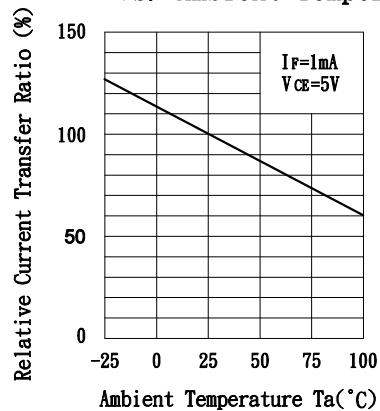


# PRODUCT SPECIFICATION

**COSMO**  
ELECTRONICS CO., LTD.


PHOTO MOS RELAYS:  
**KAQW210TSB**

SHEET 10 OF 10


**Fig. 8** Collector-emitter Saturation Voltage vs. Ambient Temperature

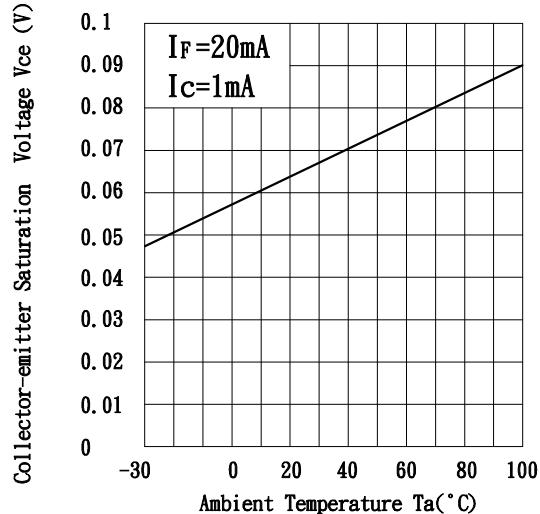

**Fig. 9** Collector-emitter Saturation Voltage vs. Forward Current

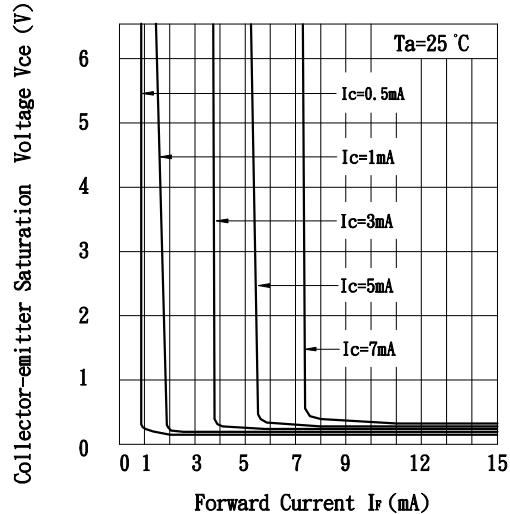

**Fig. 10** Response Time vs. Load Resistance

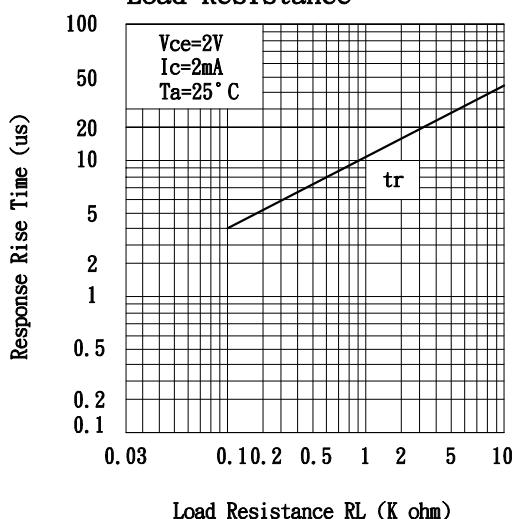

**Fig. 11** Response Time vs. Load Resistance

