

PC905

Long Creepage Distance Photocoupler with Built-in Voltage Detection Circuit

※ Lead forming type (I type) is also available. (PC905I)


※ TÜV (DIN-VDE0884) approved type is also available as an option.

■ Features

1. Built-in voltage deviation detection circuit
2. Long creepage distance type
(Creepage distance : 8mm or more)
3. Conforms to European Safety Standard
(Internal insulation distance : 0.5mm or more)
4. High collector-emitter voltage(V_{CEO} : 70V)
5. High isolation voltage between input and output (V_{iso} : 5 000V_{rms})
6. Recognized by UL, file No. E64380
Approved by BSI (BS415 : No. 6990, BS7002 : No. 7567)
Approved by SEMKO No. 963501101
Approved by DEMKO No. 392592

■ Outline Dimensions

(Unit : mm)

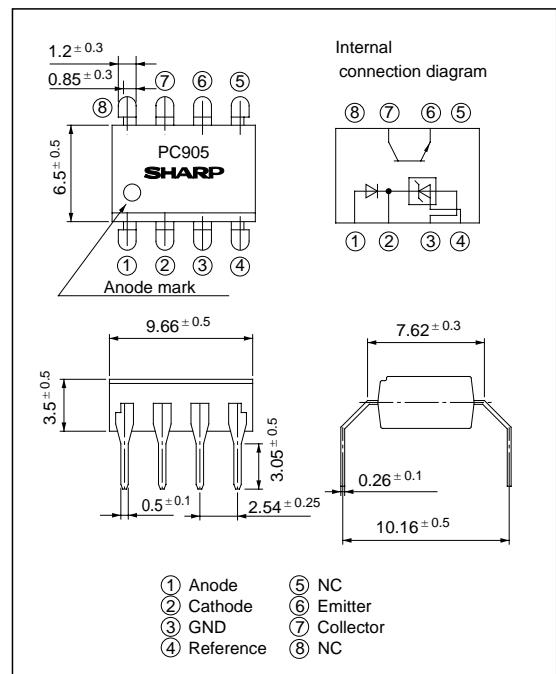

■ Applications

1. Switching power supplies

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Anode current	I _A	50	mA
	Anode voltage	V _A	30	V
	Reference input current	I _{REF}	10	mA
	Power dissipation	P	250	mW
Output	Collector-emitter voltage	V _{CEO}	70	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	50	mA
	Collector power dissipation	P _C	150	mW
Total power dissipation		P _{tot}	350	mW
^{*1} Isolation voltage		V _{iso}	5 000	V _{rms}
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 125	°C
^{*2} Soldering temperature		T _{sol}	260	°C

*1 40 to 60% RH, AC for 1 minute

*2 For 10 seconds

■ Electro-optical Characteristics

(Ta = 25°C unless otherwise specified.)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Fig.
Input	Reference voltage	V_{REF}	$V_K = V_{REF}$, $I_A = 10mA$	2.40	2,495	2.60	V 1
	* ₃ Temperature change in reference voltage	$V_{REF}(\text{dev})$	$V_K = V_{REF}$, $I_A = 10mA$, $T_a = -25 \text{ to } +85^\circ\text{C}$	-	8	40	mV 1
	Voltage variation ratio in reference voltage	$\Delta V_{REF}/\Delta V_A$	$I_A = 10mA$, $\Delta V_A = 30V$, V_{REF}	-	- 1.4	- 5	mV/V 2
	Reference input current	I_{REF}	$I_A = 10mA$, $R_3 = 10k\Omega$	-	2	10	μA 3
	* ₄ Temperature change in reference input current	$I_{REF}(\text{dev})$	$I_A = 10mA$, $R_3 = 10k\Omega$, $T_a = -25 \text{ to } +85^\circ\text{C}$	-	0.4	3	μA 3
	Minimum drive current	I_{MIN}	$V_K = V_{REF}$	-	1	2	mA 1
	OFF-state anode current	I_{OFF}	$V_A = 30V$, $V_{REF} = GND$	-	0.1	2	μA 4
	Anode-cathode forward voltage	V_F	$V_K = V_{REF}$, $I_A = 10mA$	-	1.2	1.4	V 1
Output	Collector dark current	I_{CEO}	$V_{CE} = 20V$	-	10^{-9}	10^{-7}	A 5
Transfer characteristics	* ₅ Current transfer ratio	CTR	$V_K = V_{REF}$, $I_A = 10mA$, $V_{CE} = 5V$	40	-	320	% 6
	Collector-emitter saturation voltage	$V_{CE}(\text{sat})$	$V_K = V_{REF}$, $I_A = 20mA$, $I_C = 1mA$	-	0.1	0.2	V 6
	Isolation resistance	R_{ISO}	40 to 60% RH, DC500V	5×10^{10}	1×10^{11}	-	Ω -
	Floating capacitance	C_f	$V = 0$, $f = 1MHz$	-	0.6	1.0	pF -

*₃ $V_{REF}(\text{dev}) = V_{REF(\text{MAX.})} - V_{REF(\text{MIN.})}$ *₄ $I_{REF}(\text{dev}) = I_{REF(\text{MAX.})} - I_{REF(\text{MIN.})}$ *₅ $CTR = I_C / I_A \times 100\%$

■ Test Circuit

Fig. 1

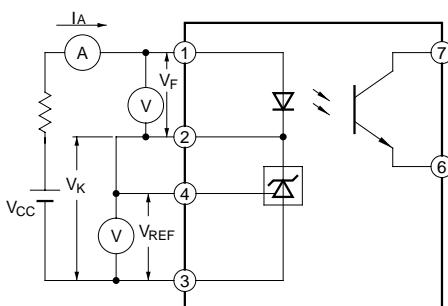
 V_K : Voltage between terminals ② and ③ V_{REF} : Voltage between terminals ③ and ④

Fig. 2

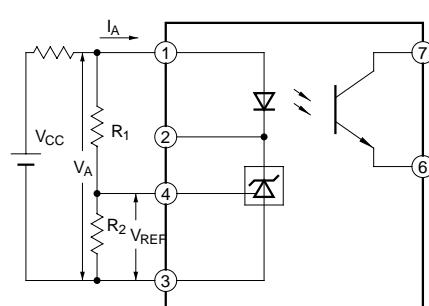


Fig. 3

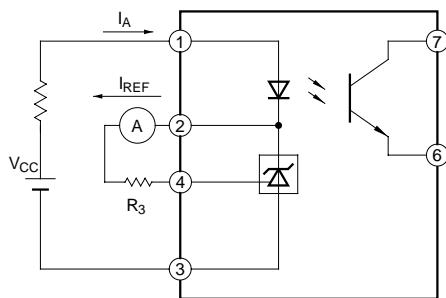


Fig. 4

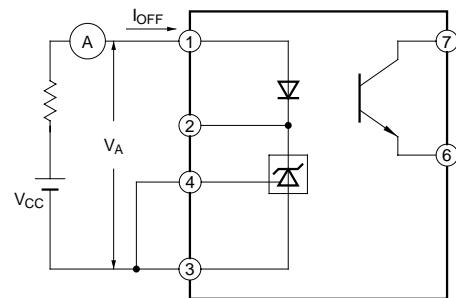


Fig. 5

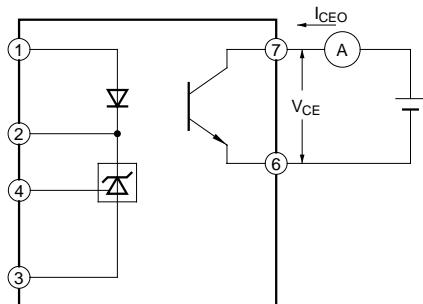


Fig. 6

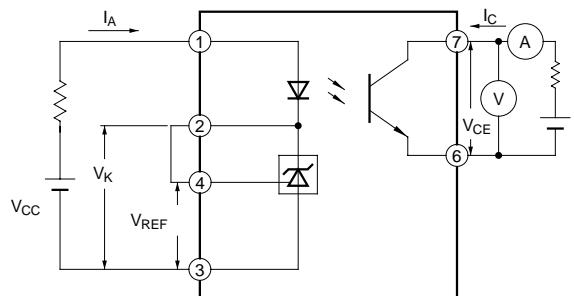


Fig. 7 Anode Current vs. Ambient Temperature

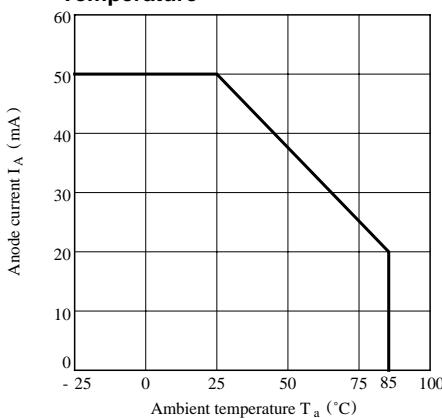


Fig. 8 Input Power Dissipation vs. Ambient Temperature

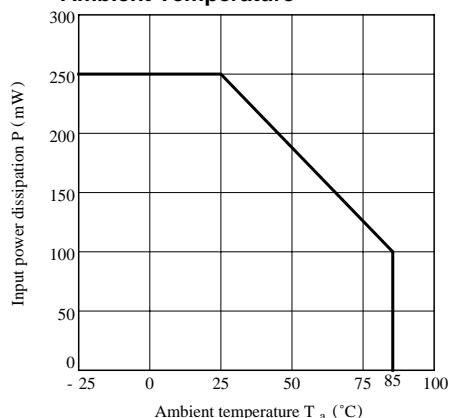


Fig. 9 Collector Power Dissipation vs. Ambient Temperature

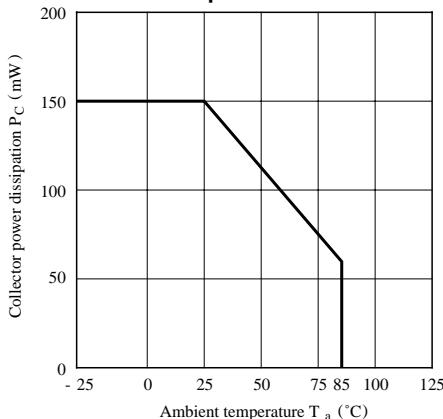


Fig.10 Power Dissipation vs. Ambient Temperature

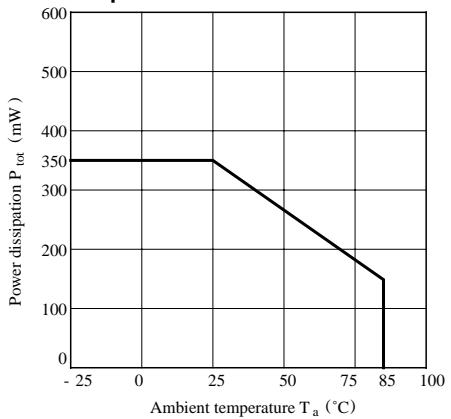


Fig.11 Relative Current Transfer Ratio vs. Ambient Temperature

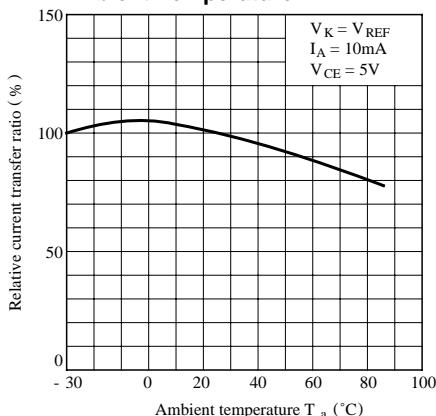


Fig.12 Collector Dark Current vs. Ambient Temperature

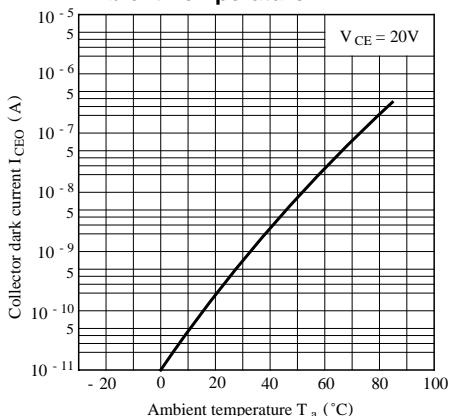


Fig.13-a Anode Current vs. Reference Voltage

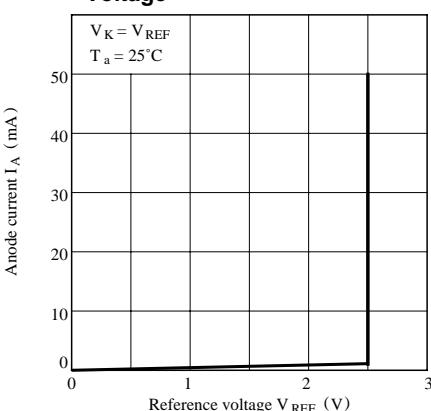


Fig.13-b Anode Current vs. Reference Voltage

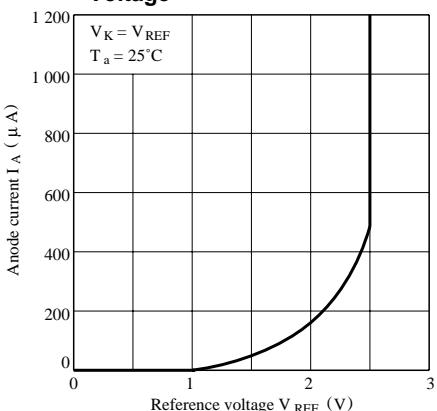


Fig.14 OFF-state Anode Current vs. Ambient Temperature

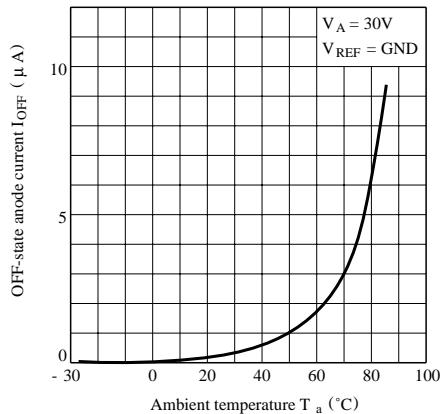


Fig.15 Reference Voltage vs. Ambient Temperature

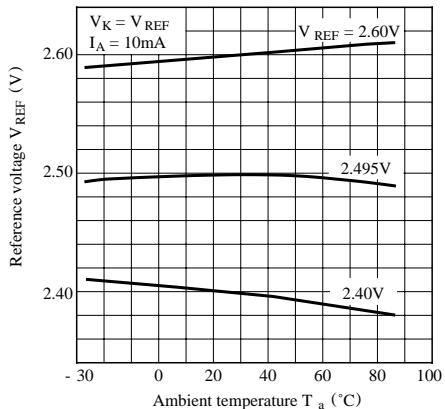


Fig.16 Reference Input Current vs. Ambient Temperature

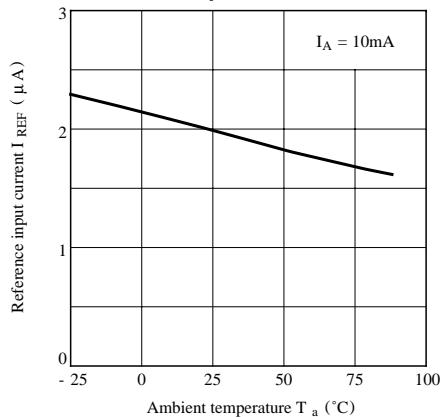


Fig.17 Reference Voltage Change vs. Anode Voltage


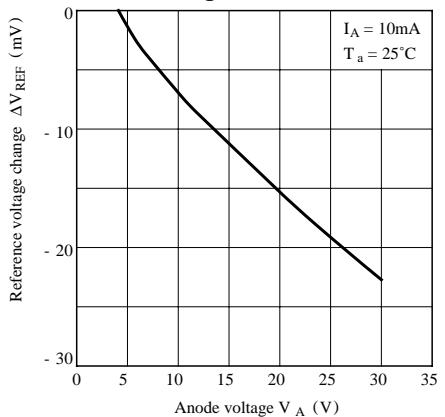


Fig.18-a Voltage Gain (1) vs. Frequency

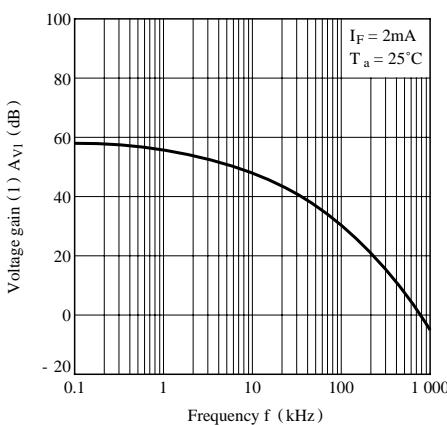

Test Circuit for Voltage Gain (1) vs. Frequency


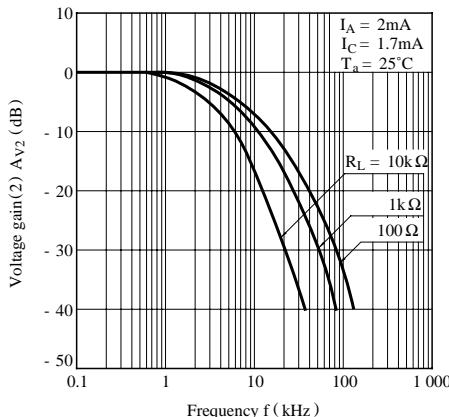
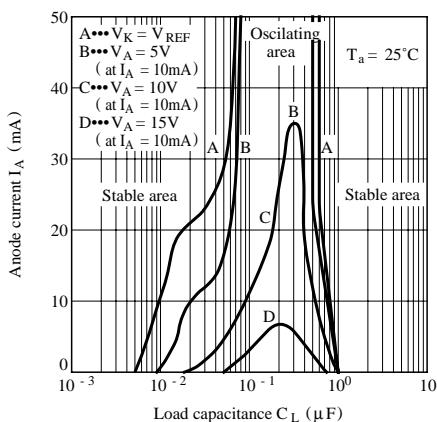
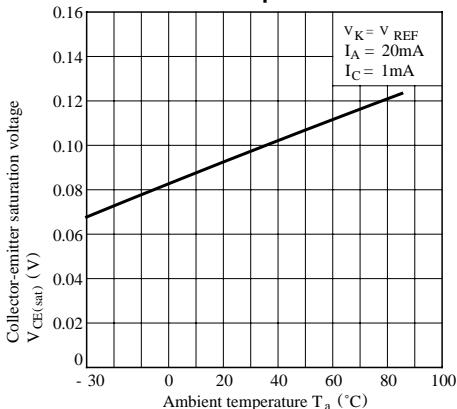
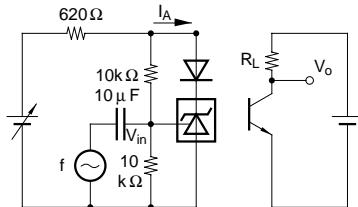



Fig.18-b Voltage Gain (2) vs. Frequency**Fig.19 Anode Current vs. Load Capacitance****Fig.20 Collector-emitter Saturation Voltage vs. Ambient Temperature**

■ Precautions for Use

Handle this product the same as with other integrated circuits against static electricity.

- As for other general cautions, refer to the chapter "Precautions for Use"

Test Circuit for Voltage Gain (2) vs. Frequency**Test Circuit for Anode Current vs. Load Capacitance****Fig.21 Current Transfer Ratio vs. Anode Current**