

# AN6162SC

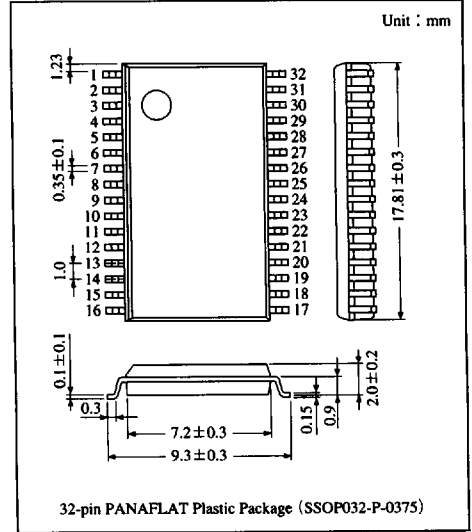
## Narrow Band FM Receiver Circuit

### Overview


The AN6162SC is an FM receiver IC for the cordless telephone sets.

### Features

- Built-in RF amplifier
- Double conversion system
- Built-in waveform shaping comparator
- Built-in squelch circuit



### Block Diagram

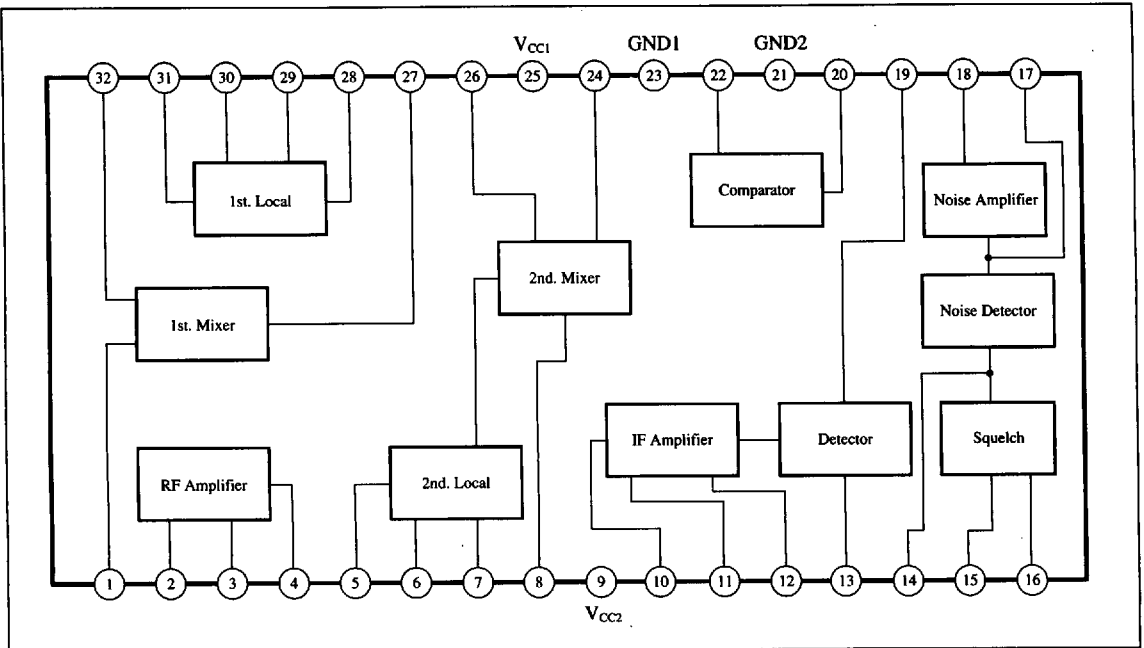

■ 6932852 0013058 312 ■

### ■ Absolute Maximum Ratings (Ta=25°C)

| Parameter                     | Symbol           | Rating      | Unit |
|-------------------------------|------------------|-------------|------|
| Supply voltage                | V <sub>CC</sub>  | 6           | V    |
| Supply current                | I <sub>CC</sub>  | 15          | mA   |
| Power dissipation (Ta=75°C)   | P <sub>D</sub>   | 294         | mW   |
| Operating ambient temperature | T <sub>opr</sub> | -20 to +75  | °C   |
| Storage temperature           | T <sub>stg</sub> | -55 to +125 | °C   |

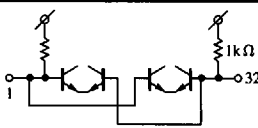






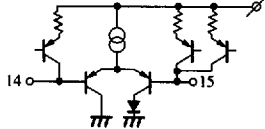


### ■ Recommended Operating Range (Ta=25°C)

| Parameter                      | Symbol          | Range     |
|--------------------------------|-----------------|-----------|
| Operating supply voltage range | V <sub>CC</sub> | 2 to 5.5V |

### ■ Electrical Characteristics (Ta=25°C)

| Parameter                     | Symbol           | Condition  | min | typ | max | Unit     |
|-------------------------------|------------------|--|-----|-----|-----|----------|
| Current consumption           | I <sub>CC1</sub> | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz<br>Connect 240 $\Omega$ to the Pin③ and<br>5.1k $\Omega$ to the Pin②       | —   | 6.2 | 9   | mA       |
|                               | I <sub>CC2</sub> | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz<br>Open the Pins③ and ②.   | —   | 3.8 | 5.2 | mA       |
| Output voltage                | V <sub>O</sub>   | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz<br>Input a signal from the Pin⑩ and<br>measure the output at the Pin⑨.     | 100 | 125 | 180 | mVrms    |
| IF input limiting sensitivity | V <sub>L</sub>   | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz<br>Pin⑩ input level when the<br>Pin⑨ output is -3 dB.                      | —   | 55  | 60  | dB $\mu$ |
| Mixer gain                    | G <sub>M</sub>   | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz,<br>Measure the conversion gain between<br>the input Pin④ and output Pin⑧. | 59  | 64  | —   | dB       |
| Total harmonic distortion     | THD              | V <sub>in</sub> =80dB $\mu$ , f <sub>o</sub> =455kHz,<br>f <sub>MOD</sub> =1kHz, $\Delta$ f=10kHz<br>Input a signal from the Pin⑩ and<br>measure the output at the Pin⑨.     | —   | 1   | 8   | %        |

Pin Descriptions

| Pin No. | Pin name                | Description   | Equivalent circuit   |
|---------|-------------------------|---|--|
| 1       | 1st mixer input         | Input pin of the 1st mixer circuit                    |    |
| 2       | RF amplifier collect    | Output pin of the RF amplifier                        |    |
| 3       | RF amplifier emitter    | Emitter ground pin of the RF amplifier                |  |
| 4       | RF amplifier base       | Input pin of the RF amplifier                         |  |
| 5       | 2nd oscillator emitter  | External part connection pin of the 2nd oscillator    |    |
| 6       | 2nd oscillator base     |   |  |
| 7       | 2nd oscillator output   |   |  |
| 8       | 2nd mixer output        | Output of the 2nd mixer circuit                       |    |
| 9       | V <sub>CC2</sub>        | Supply voltage pin                                    |   |
| 10      | IF amplifier input      | Input pin of the IF amplifier                         |  |
| 11      | IF amplifier decoupling | Bypass capacitor connection pin                       |  |
| 12      |                         |   |  |
| 13      | Quadrature coil         | Detection coil connection pin                         |  |
| 14      | Noise detection         | Noise detection level adjustment by external resistor |  |
| 15      | Squelch hysteresis      | Hysteresis width adjustment by external resistor      |  |
| 16      | Squelch output          | Squelch output pin (open collector)                   |  |
| 17      | Noise amplifier output  | Noise amplifier output pin                            |  |

ICs for Telephone


6932852 0013060 T70

■ Pin Descriptions (cont.)

| Pin No. | Pin name              | Description                            | Equivalent circuit |
|---------|-----------------------|--|--------------------|
| 18      | Noise amplifier input | Noise amplifier input pin              |                    |
| 19      | Detection             | Detection signal output pin            |                    |
| 20      | Comparator input      | Comparator input pin                   |                    |
| 21      | GND2                  | Ground pin                             |                    |
| 22      | Comparator output     | Comparator output pin (open collector) |                    |
| 23      | GND1                  | Ground pin                             |                    |
| 24      | 2nd mixer decoupling  | Bypass capacitor connection pin        |                    |
| 25      | V <sub>CC1</sub>      | Supply voltage pin                     |                    |
| 26      | 2nd mixer input       | Input pin of the 2nd mixer circuit     |                    |
| 27      | 1st mixer output      | Output pin of the 1st mixer circuit    |                    |
| 28      | 1st oscillator output | Output pin of the 1st oscillator       |                    |
| 29      | 1st oscillator tank   | Tank coil connection pin               |                    |
| 30      | 1st oscillator tank   | Tank coil connection pin               |                    |
| 31      | Variable cap control  | Variable cap control pin               |                    |
| 32      | 1st mixer input       | Input pin of the 1st mixer current     |                    |


■ 6932852 0013061 907 ■

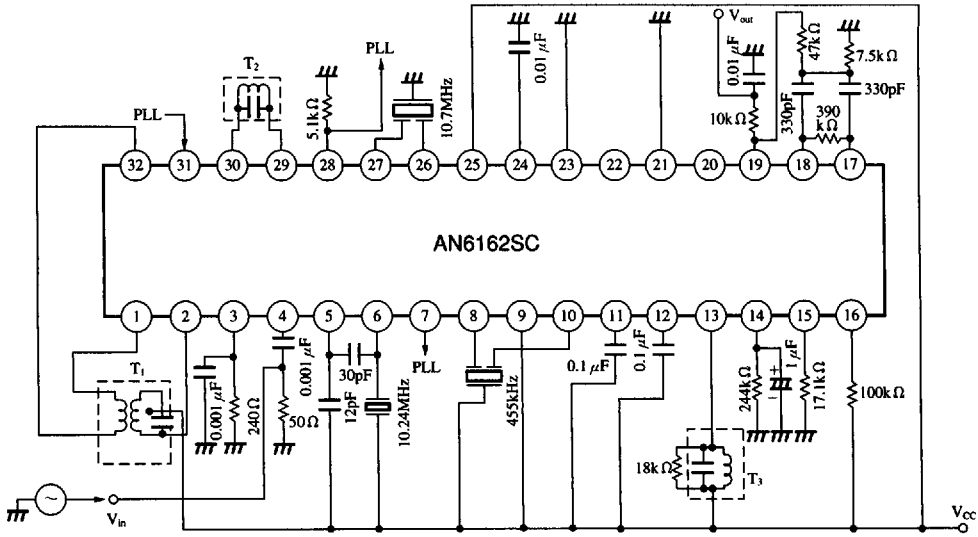■ Application Circuit




■ Characteristics Curve

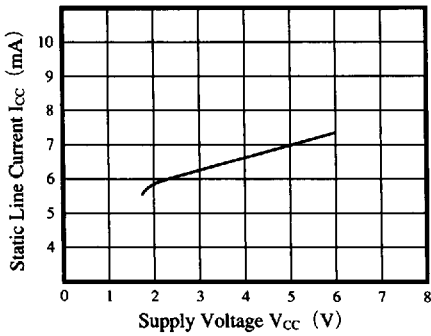$I_{CC} - V_{CC}$  Characteristics



$V_O - V_{in}$  Characteristics

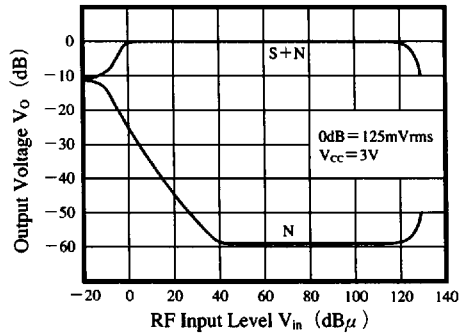

ICs for Telephone

6932852 0013062 843

Panasonic