


## CMOS 8-Bit Microcontroller

**TMP87PM53F**

The 87PM53 is a One-Time PROM microcontroller with low-power 256 K bits electrically programmable read only memory for the 87CM53 system evaluation. The 87PM53 is pin compatible with the 87CM53. The operations possible with the 87CM53 can be performed by writing programs to PROM. The 87PM53 can write and verify in the same way as the TC571000D using an adaptor socket BM11104 and an EPROM programmer.

Part No.	OTP	RAM	Package	OTP Adapter
TMP87PM53F	32 K × 8-bit	1 K × 8-bit	P-QFP80-1420-0.80B	BM11104

P-QFP80-1420-0.80B




980910EBP1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance/Handling Precautions.
- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Pin Assignments (Top View)

P-QFP80-1420-0.80B

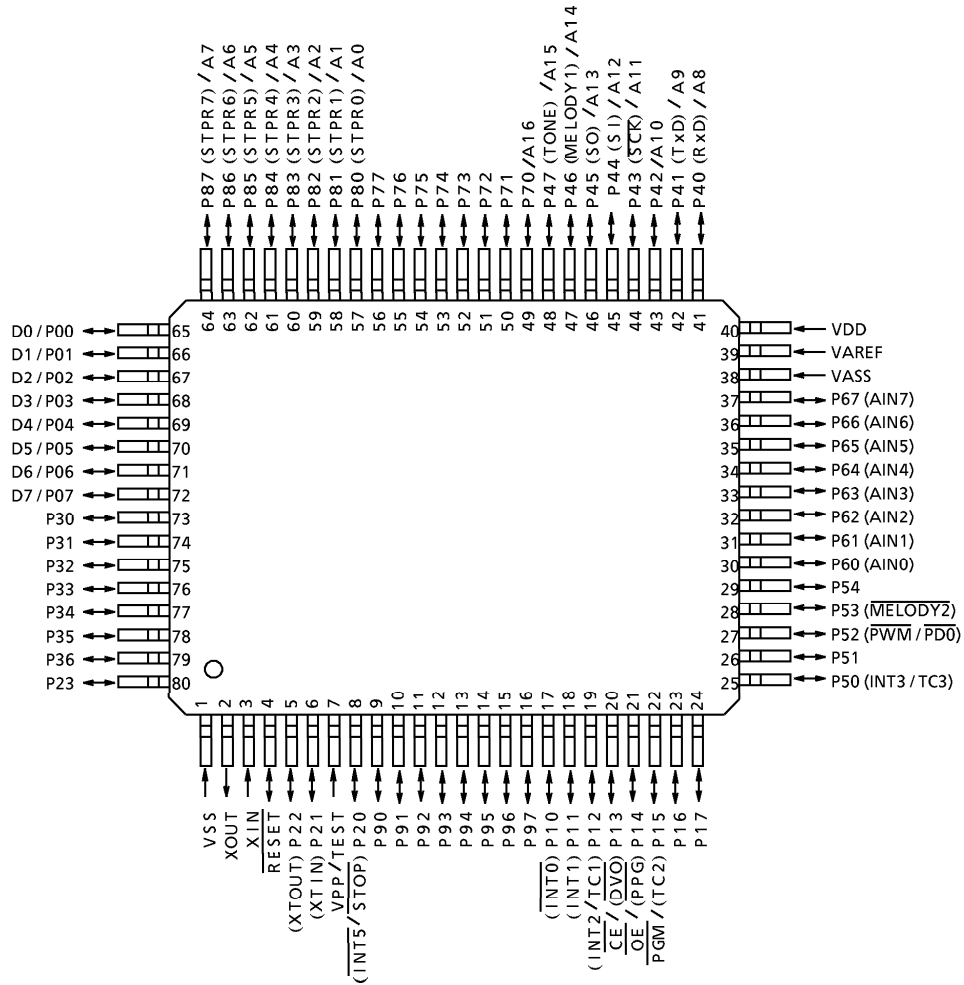

**Pin Function**

The 87PM53 has two modes: MCU and PROM.

(1) MCU mode

In this mode, the 87PM53 is pin compatible with the 87CM53 (fix the TEST pin at low level.)

(2) PROM mode

Pin Name (PROM mode)	Input/Output	Functions	Pin Name (MCU mode)
A16	Input	PROM address inputs	P70
A15 to A8			P47 to P40
A7 to A0			P87 to P80
D7 to D0	I/O	PROM data input/outputs	P07 to P00
$\overline{CE}$	Input	Chip enable signal input (active low)	P13
$\overline{OE}$		Output enable signal input (active low)	P14
$\overline{PGM}$		Program mode signal input	P15
VPP	Power supply	+ 12.75 V / 5 V (Program supply voltage)	TEST
VCC		+ 6.25 V / 5 V	VDD
GND		0 V	VSS
P36 to P30	I/O	Pull-up with resistance for input processing.	PROM mode setting pin. Be fixed at high level.
P54 to P50			
P67 to P60			
P77 to P72			
P11		PROM mode setting pin. Be fixed at low level.	
P21			
P71			
P17, P16, P12, P10 P22, P20			
$\overline{RESET}$			
XIN	Input	Connect an 8MHz oscillator to stabilize the internal state.	
XOUT	Output		
VAREF	Power supply	0 V (GND)	
VASS			

**OPERATIONAL DESCRIPTION**

The following explains the 87PM53 hardware configuration and operation. The configuration and functions of the 87PM53 are the same as those of the 87CM53, except in that a one-time PROM is used instead of an on-chip mask ROM.

The 87PM53 is placed in the *single-clock* mode during reset. To use the dual-clock mode, the low-frequency oscillator should be turned on by executing [SET (SYSCR2). XTEN] instruction at the beginning of the program.

**1. OPERATING MODE**

The 87PM53 has two modes: MCU and PROM.

**1.1 MCU Mode**

The MCU mode is activated by fixing the TEST / VPP pin at low level.

In the MCU mode, operation is the same as with the 87CM53 (the TEST / VPP pin cannot be used open because it has no built-in pull-down resistance).

**1.1.1 Program Memory**

The 87PM53 has a 32K × 8-bit (addresses 8000<sub>H</sub>-FFFF<sub>H</sub> in the MCU mode, addresses 18000<sub>H</sub>-1FFFF<sub>H</sub> in the PROM mode) of program memory (OTP).

When the 87PM53 is used as a system evaluation of the 87CM53, the data is written to the program storage area shown in Figure 1-1.

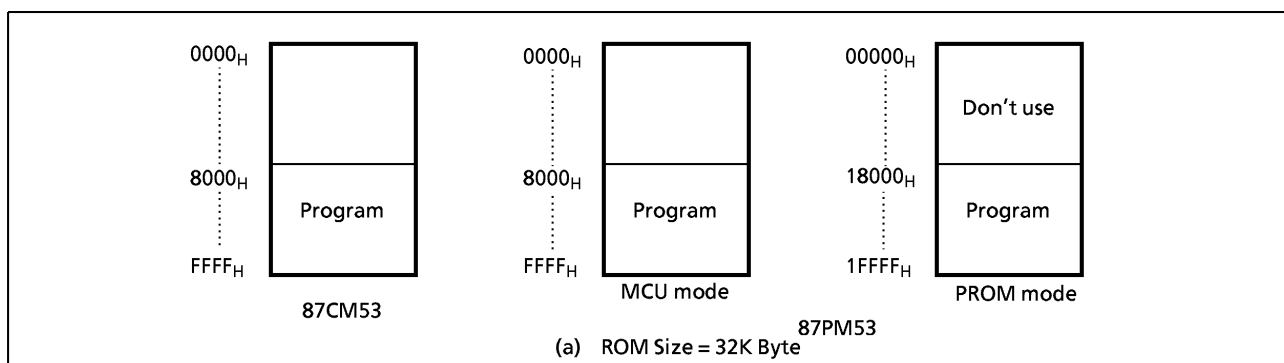


Figure 1.1 Program Memory Area

*Note : Either write the data FF<sub>H</sub> to the unused area or set the PROM programmer to access only the program storage area.*

Electrical Characteristics

(1) 87PM53

Absolute Maximum Ratings (V<sub>SS</sub> = 0 V)

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V <sub>DD</sub>		- 0.3 to 6.5	V
Input Voltage	V <sub>IN</sub>		- 0.3 to V <sub>DD</sub> + 0.3	V
Output Voltage	V <sub>OUT</sub>		- 0.3 to V <sub>DD</sub> + 0.3	V
Output Current (Per 1pin)	I <sub>OUT1</sub>	Ports P0, P1, P2, P4, P5, P6, P7, P8, P9	3.2	mA
	I <sub>OUT2</sub>	Port P3	30	
Output Current (Total)	Σ I <sub>OUT1</sub>	Ports P0, P1, P2, P4, P5, P6, P7, P8, P9	160	mA
	Σ I <sub>OUT2</sub>	Port P3	120	
Power Dissipation [Topr = 70°C]	PD		350	mW
Soldering Temperature (time)	T <sub>sld</sub>		260 (10 s)	°C
Storage Temperature	T <sub>stg</sub>		- 55 to 125	°C
Operating Temperature	Topr		- 30 to 60	°C

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Recommended Operating Conditions (V<sub>SS</sub> = 0 V, Topr = - 30 to 60°C)

Parameter	Symbol	Pins	Conditions	Min	Max	Unit
Supply Voltage	V <sub>DD</sub>		f <sub>c</sub> = 8 MHz	NORMAL1, 2 mode	4.5	V
				IDLE1, 2 mode		
			f <sub>c</sub> ≤ 4.2 MHz	NORMAL1, 2 mode	2.2 Note 2	
				IDLE1, 2 mode		
			f <sub>s</sub> = 32.768 kHz	SLOW mode	2.0	
SLEEP mode						
		STOP mode				
Input High Voltage	V <sub>IH1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5 V	V <sub>DD</sub> × 0.70	V <sub>DD</sub>	V
	V <sub>IH2</sub>	Hysteresis input		V <sub>DD</sub> × 0.75		
	V <sub>IH3</sub>			V <sub>DD</sub> < 4.5 V		
Input Low Voltage	V <sub>IL1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5 V	0	V <sub>DD</sub> × 0.30	V
	V <sub>IL2</sub>	Hysteresis input			V <sub>DD</sub> × 0.25	
	V <sub>IL3</sub>				V <sub>DD</sub> < 4.5 V	
Clock Frequency	f <sub>c</sub>	XIN, XOUT	V <sub>DD</sub> = 4.5 to 5.5 V	3.58	8.0	MHz
			V <sub>DD</sub> = 2.2 to 5.5 V		4.19	
	f <sub>s</sub>	XTIN, XTOUT		30.0	34.0	kHz

Note 1: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

Note 2: Clock frequency f<sub>c</sub>: The supply voltage range of the conditions shows the value in NORMAL1, 2 modes and IDLE1, 2 modes.

Note 3: When the A/D converter is used, V<sub>DD</sub> must be set to ≥ 2.7 V.

D.C. Characteristics (V<sub>SS</sub> = 0 V, T<sub>opr</sub> = -30 to 60°C)

Parameter	Symbol	Pins	Conditions	Min	Typ.	Max	Unit	
Hysteresis Voltage	V <sub>HS</sub>	Hysteresis input		-	0.9	-	V	
Input Current	I <sub>IN1</sub>	TEST	V <sub>DD</sub> = 5.5V V <sub>IN</sub> = 5.5V / 0V	-	-	± 2	μA	
	I <sub>IN2</sub>	Sink open drain port and tri-state port						
	I <sub>IN3</sub>	RESET, STOP						
Input Resistance	R <sub>IN2</sub>	RESET		100	220	450	kΩ	
	R <sub>IN</sub>	P8 pull-up resistor		30	70	150		
Output Leakage Current	I <sub>LO</sub>	Sink open drain port	V <sub>DD</sub> = 5.5V, V <sub>OUT</sub> = 5.5V	-	-	2	μA	
Output High Voltage	V <sub>OH2</sub>	Try-state port	V <sub>DD</sub> = 4.5V, I <sub>OH</sub> = -0.7mA	4.1	-	-	V	
Output Low Voltage	V <sub>OL</sub>	Except XOUT and P3	V <sub>DD</sub> = 4.5V, I <sub>OL</sub> = 1.6mA	-	-	0.4	V	
Output Low Current	I <sub>OL3</sub>	Port P3	V <sub>DD</sub> = 4.5V, V <sub>OL</sub> = 1.0V	-	20	-	mA	
Supply Current in NORMAL 1, 2 mode	I <sub>DD</sub>		V <sub>DD</sub> = 5.5V V <sub>IN</sub> = 5.3V/0.2V f <sub>c</sub> = 8 MHz f <sub>s</sub> = 32.768 kHz	TONE no output	-	9	12	mA
Supply Currnt in IDLE 1, 2 mode				TONE output	-	10.5	13.5	
				TONE no output	-	4.5	6.5	
Supply Currnt in NORMAL 1, 2 mode				TONE output	-	6.0	8.0	
				TONE no output	-	1.5	2.5	
Supply Currnt in IDLE 1, 2 mode				TONE output	-	2.0	3.0	
	TONE no output	-	0.8	1.8				
Supply Current in SLOW mode	I <sub>DD</sub>		V <sub>DD</sub> = 3.0V V <sub>IN</sub> = 2.8V/0.2V f <sub>s</sub> = 32.768 kHz	-	30	60	μA	
				-	15	30	μA	
Supply Current in STOP mode	I <sub>DD</sub>		V <sub>DD</sub> = 5.5V V <sub>IN</sub> = 5.3V/0.2V		0.5	10	μA	

Note 1: Typical values show those at T<sub>opr</sub> = 25°C, V<sub>DD</sub> = 5 V.  
 Note 2: Input current: The current through pull-up or pull-down resistor is not included.

**A/D Conversion Characteristics** ( $V_{SS} = 0V, V_{DD} = 2.7 \text{ to } 5.5V, T_{opr} = -30 \text{ to } 60^\circ C$ )

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Analog Reference Voltage	$V_{AREF}$	$V_{AREF} - V_{ASS} \geq 2.5V$	2.7	—	$V_{DD}$	V
	$V_{ASS}$		$V_{SS}$	—	1.5	
Analog Input Voltage	$V_{AIN}$	$V_{DD} = V_{AREF} = 5.0V$ $V_{SS} = V_{ASS} = 0.0V$	$V_{ASS}$	—	$V_{AREF}$	V
Analog Supply Current	$I_{REF}$		—	0.5	1.0	V
Nonlinearity Error		$V_{DD} = 2.7 \text{ to } 5.5V$	—	—	$\pm 1$	mA
Zero Point Error		$V_{SS} = 0.0V$	—	—	$\pm 1$	
Full Scale Error		$V_{AREF} = 2.700V, 5.000V$	—	—	$\pm 1$	LSB
Total Error		$V_{ASS} = 0.000V$	—	—	$\pm 2$	

*Note: Total Error = total number of each type error excluding quantization error.*

**Tone Output Characteristics** ( $V_{SS} = 0V, V_{DD} = 2.2 \text{ to } 5.5V, T_{opr} = -30 \text{ to } 60^\circ C$ )

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Tone Output Voltage (ROW)	$V_{TONE}$	$R_L \geq 10k\Omega, V_{DD} = 2.2V$	126	150	178	mVrms
Pre-Emphasis High Band (COL/ROW)	PEHB	$PEHB = 20 \log (COL/ROW)$	1	2	3	dB
Output Distortion	DIS		—	—	5	%
Frequency Stability	$\Delta f$	$f_c = 3.84 \text{ MHz}, 4.00 \text{ MHz}, 8.00 \text{ MHz}$ (Except error of osc. frequency)	—	—	0.70	%
		$f_c = 3.58 \text{ MHz}$ (Except error of osc. frequency)	—	—	0.66	
		$f_c = 4.19 \text{ MHz}$ (Except error of osc. frequency)	—	—	0.93	


**A.C. Characteristics**

( $V_{SS} = 0\text{ V}$ ,  $V_{DD} = 4.5\text{ to }5.5\text{ V}$ ,  $T_{opr} = -30\text{ to }60^\circ\text{C}$ )

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Machine Cycle Time	t <sub>cy</sub>	In NORMAL1, 2 mode (gear ratio)	0.5 (1/1)	-	8.9 (1/8)	μs
		In IDLE1, 2 mode (gear ratio)				
		In SLOW mode	117.6		133.3	
		In SLEEP mode				
High Level Clock Pulse Width	t <sub>WCH</sub>	For external clock operation (XIN input) f <sub>c</sub> = 8 MHz	50	-	-	ns
Low Level Clock Pulse Width	t <sub>WCL</sub>					
High Level Clock Pulse Width	t <sub>WSH</sub>	For external clock operation (XTIN input) f <sub>s</sub> = 32.768 kHz	14.7	-	-	μs
Low Level Clock Pulse Width	t <sub>WSL</sub>					

**Recommended Oscillating Condition**

Parameter	Oscillator	Frequency	Recommended Oscillator	Recommended Condition	
				C <sub>1</sub>	C <sub>2</sub>
High-frequency	Ceramic Resonator	8 MHz	KYOCERA KBR8.0M	30 pF	30 pF
		4 MHz	KYOCERA KBR4.0MS		
			MURATA CSA4.00MG		
	Crystal Oscillator	8 MHz	TOYOCOM 210B 8.0000	20 pF	20 pF
4 MHz		TOYOCOM 204B 4.0000			
Low-frequency	Crystal Oscillator	32.768 kHz	NDK MX-38T	15 pF	15 pF

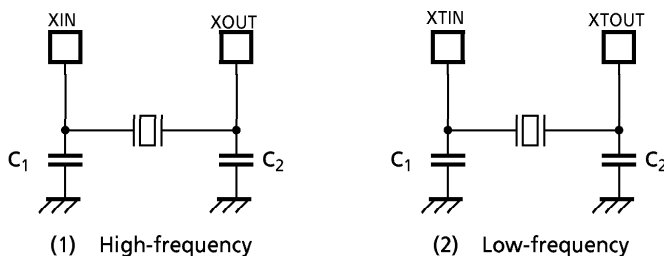

*Note: When it is used in high electrical field, an electrical shield of the package is recommended to retain normal operations*

*Note: To obtain an accurate oscillating frequency the condenser capacity must be adjusted on the sct.*




D.C./A.C. Characteristics (PROM mode) ( $V_{SS} = 0\text{ V}$ )

(1) Read Operation


Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Input High Voltage	$V_{IH4}$		2.2	—	$V_{CC}$	V
Input Low Voltage	$V_{IL4}$		0	—	0.8	V
Power Supply Voltage	$V_{CC}$		4.75	5.0	5.25	V
Program Power Supply Voltage	$V_{PP}$					V
Address Access Time	$t_{ACC}$	$V_{CC} = 5.0 \pm 0.25\text{ V}$	—	$1.5\text{ }t_{cyc} + 300$	—	ns

Note:  $t_{cyc} = 500\text{ ns}$  at 8 MHz

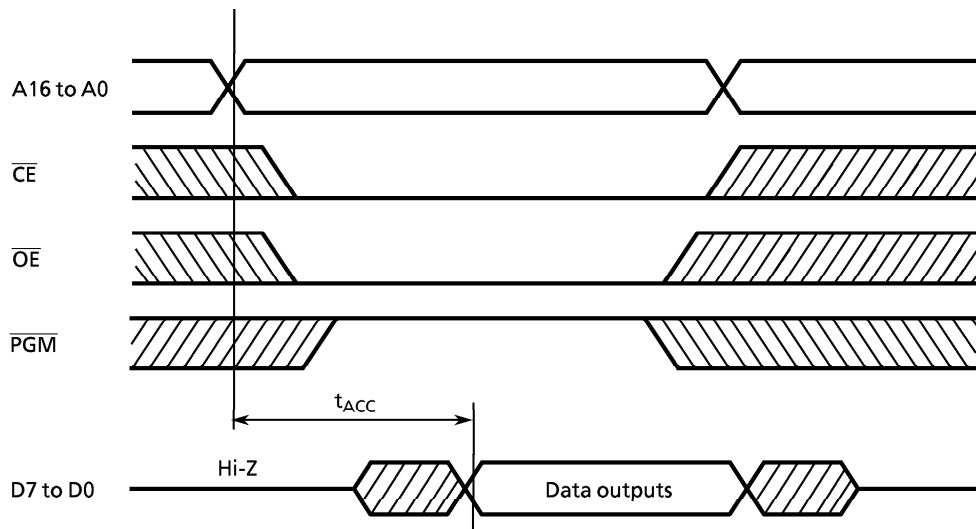

(2) High-Speed Programming Operation ( $T_{opr} = 25 \pm 5^{\circ}\text{C}$ )

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Input High Voltage	$V_{IH4}$		2.2	–	$V_{CC}$	V
Input Low Voltage	$V_{IL4}$		0	–	0.8	V
Power Supply Voltage	$V_{CC}$		6.0	6.25	6.5	V
Program Power Supply Voltage	$V_{PP}$		12.5	12.75	13.0	V
Initial Program Pulse Width	$t_{PW}$	$V_{CC} = 6.0\text{ V}$	0.095	0.1	0.105	ms

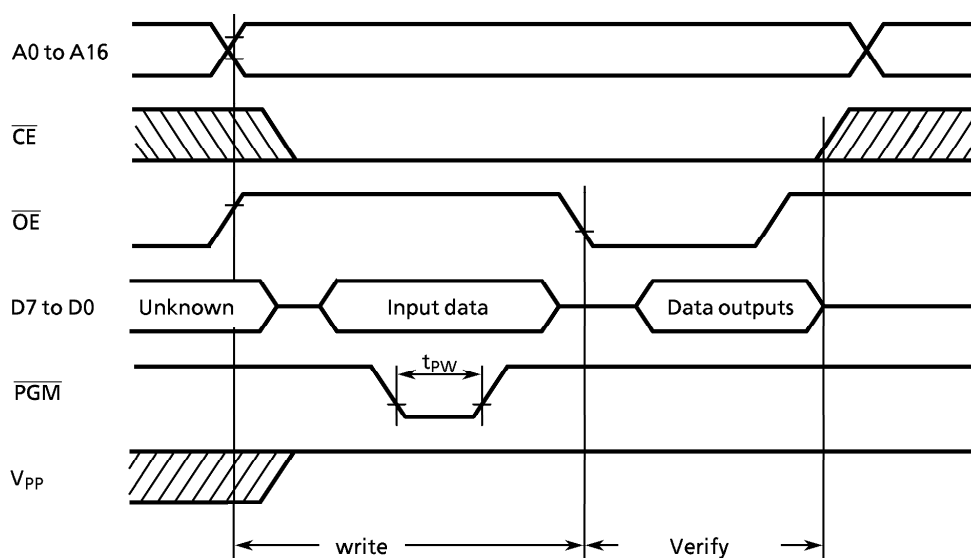

**Note1:** When  $V_{CC}$  power supply is turned on or after,  $V_{PP}$  must be increased.  
 When  $V_{CC}$  power supply is turned off or before,  $V_{PP}$  must be increased.

**Note2:** The device must not be set to the EPROM programmer or picked up from it under applying the program voltage ( $12.5\text{ V} \pm 0.5\text{ V} = \text{V}$ ) to the  $V_{PP}$  pin as the device is damaged.

**Note3:** Be sure to execute the recommended programming mode with the recommended programming adaptor. If a mode or an adaptor except the above, the misoperation sometimes occurs.