

CMOS 8-bit Single Chip Microcomputer

Piggyback/
evaluator type

Description

The CXP82300 is a CMOS 8-bit single chip micro-computer of piggyback/evaluator combined type, which is developed for evaluating the function of the CXP82316/82320/82324.


Features

- Wide-range instruction system (213 instructions) to cover various types of data
 - 16-bit operation/multiplication and division/
Boolean bit operation instructions
- Minimum instruction cycle 400ns at 10MHz operation
- Applicable EPROM LCC type 27C128, LCC type 27C256
(Maximum 24K bytes are available.)
- Incorporated RAM capacity 704 bytes (Including fluorescent display data area)
- Peripheral functions
 - A/D converter 8-bit, 8-channel, successive approximation method
(Conversion time of 32 μ s/10MHz)
 - Serial interface Incorporated 8-bit, 8-stage FIFO (Auto transfer for 1 to 8 bytes), 1 channel
8-bit clock sync type, 1 channel
 - Timer 8-bit timer
8-bit timer/counter
19-bit time base timer
16-bit capture timer/counter
 - Fluorescent display panel controller/driver
Maximum 336 segment display possible
1 to 16-digit dynamic display
Dimmer function
High voltage drive output (40V)
On-chip pull-down resistor (Mask option)
Hardware key scan function (Maximum 16 \times 8 key matrix compatible)
 - Remote control reception circuit 8-bit pulse measurement counter with on-chip 6-stage FIFO
- Interruption 14 factors, 14 vectors, multi-interruption possible
- Standby mode Sleep/stop
- Package 80-pin ceramic QFP

Note) Mask option depends on the type of the CXP82300. Refer to the Products List for details.


Structure

Silicon gate CMOS IC

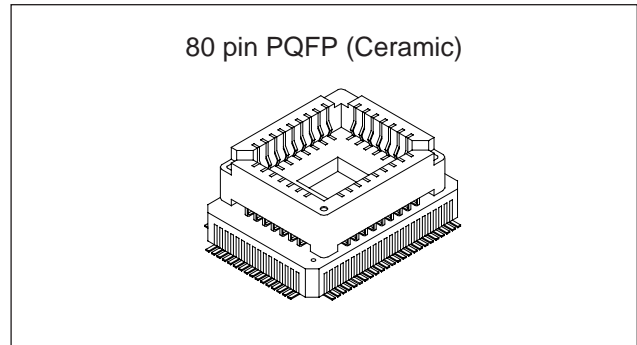


Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

Pin Assignment in Piggyback Mode

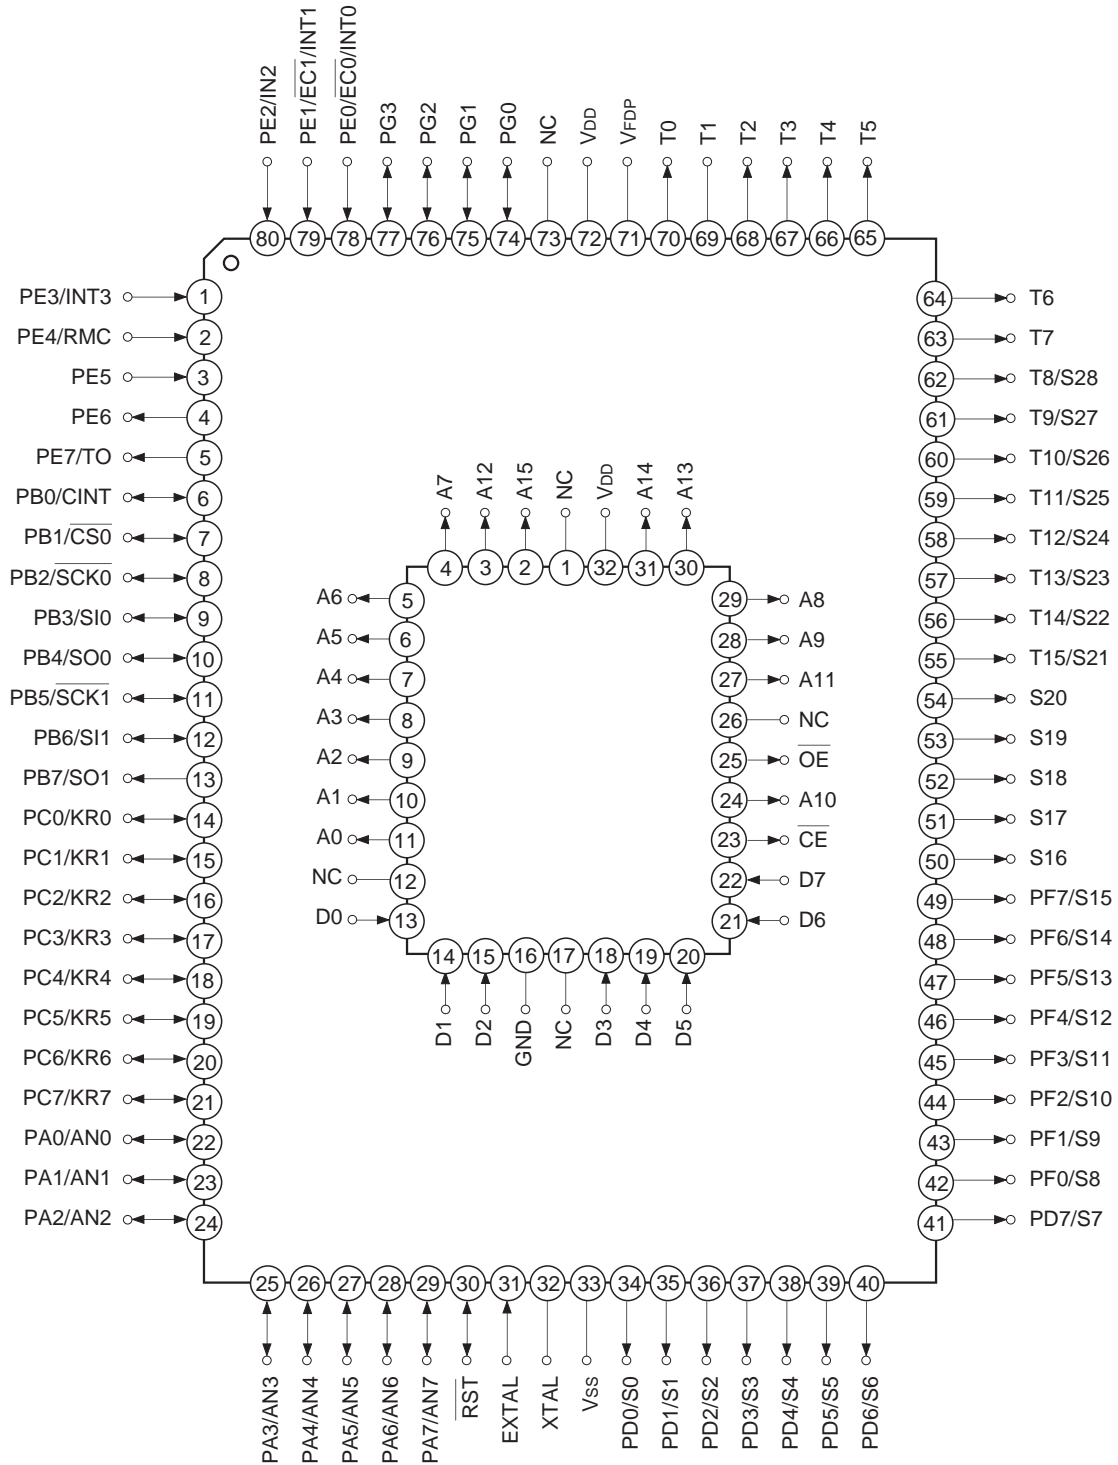

Note NC (Pin 73) is always connected to VDD.

Pin Assignment in Evaluator Mode

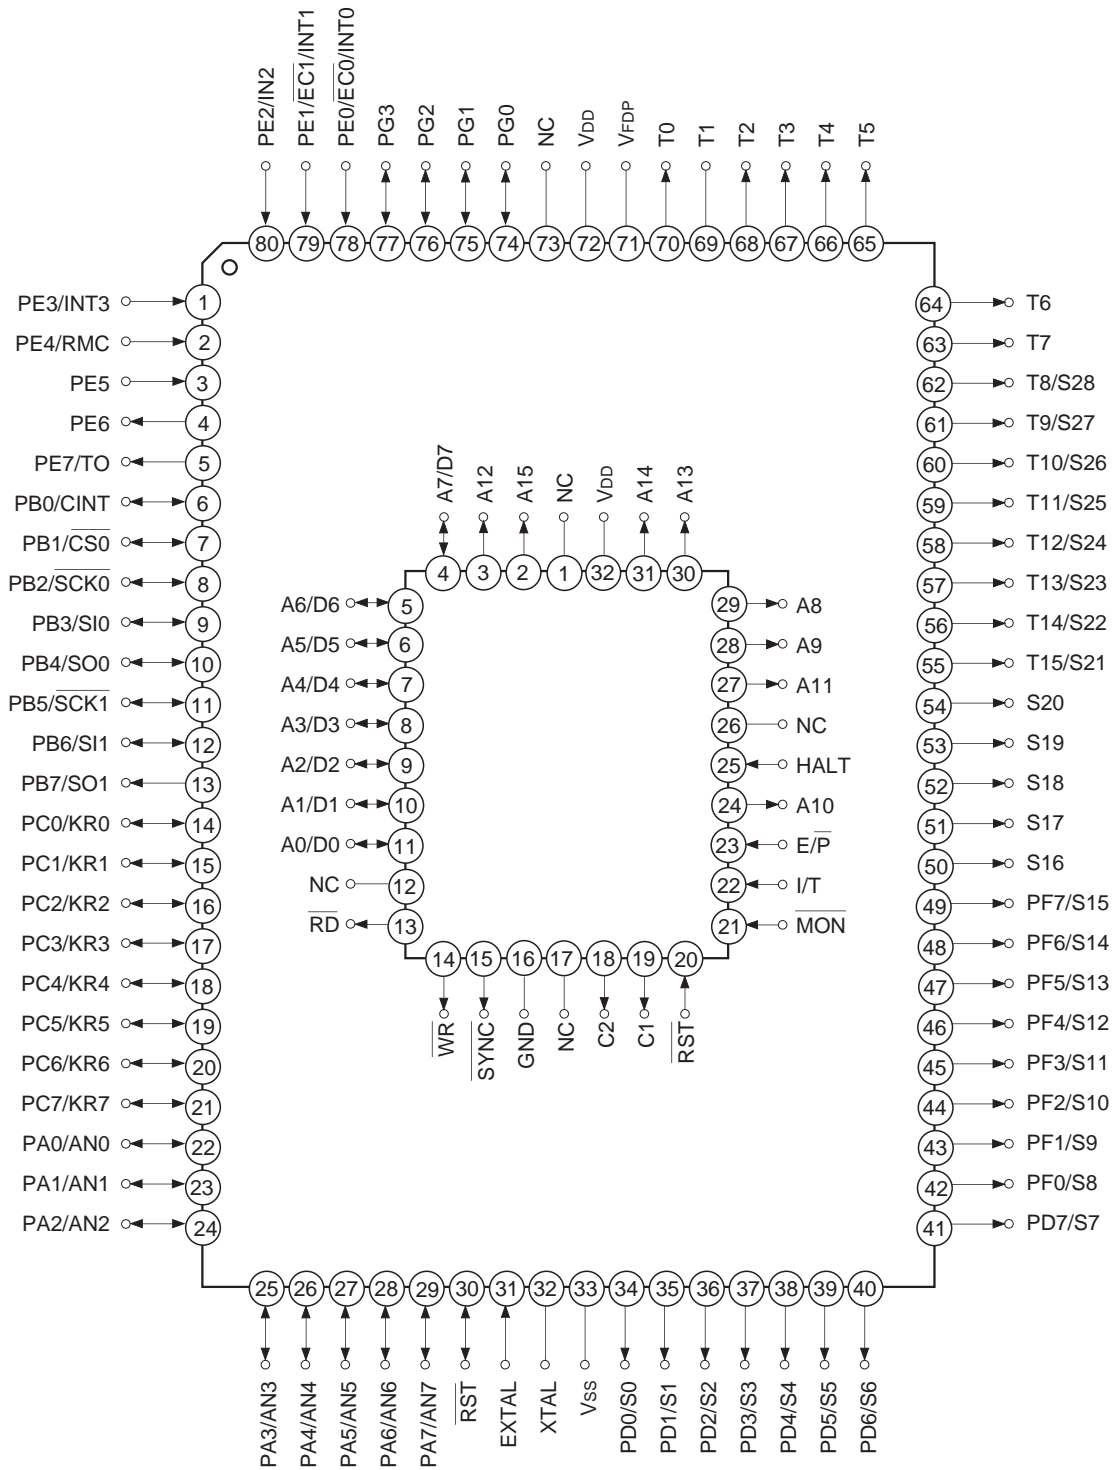


Note NC (Pin 73) is always connected to V_{DD}.

EPROM Read Timing

($T_a = -20$ to $+75^\circ\text{C}$, $V_{cc} = 4.5$ to 5.5V , $V_{ss} = 0\text{V}$ reference)


Item	Symbol	Pins	Min.	Max.	Unit
Address → Data Input delay time	t_{ACC}	A0 to A15 D0 to D7		120	ns
Address → Data Hold time	t_{IH}	A0 to A15 D0 to D7	0		ns

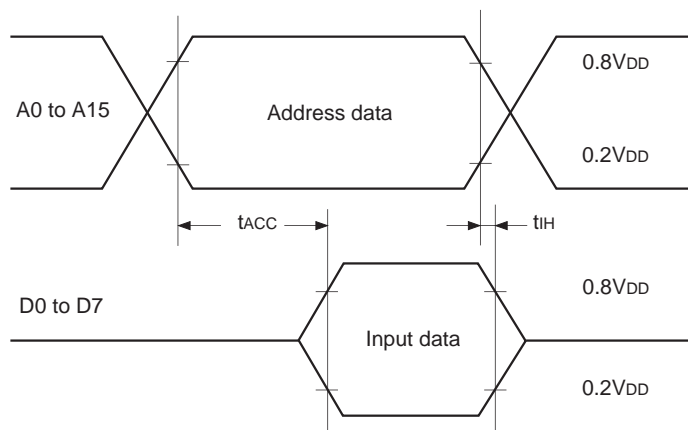

Products List

Option item	Products			
	Mask			Piggyback/evaluator
	CXP82316	CXP82320	CXP82324	CXP82300-U01Q
Package	80-pin plastic QFP			80-pin ceramic PQFP
ROM capacitance	16K bytes	20K bytes	24K bytes	24K bytes
Pull-up resistance for reset pin	Existent/Non-existent			Existent
Power-on reset circuit	Existent/Non-existent			Existent
Pull-down resistance for high voltage drive pin	Existent/Non-existent			Only port for display




Piggyback mode/evaluator mode can be switched as shown below.

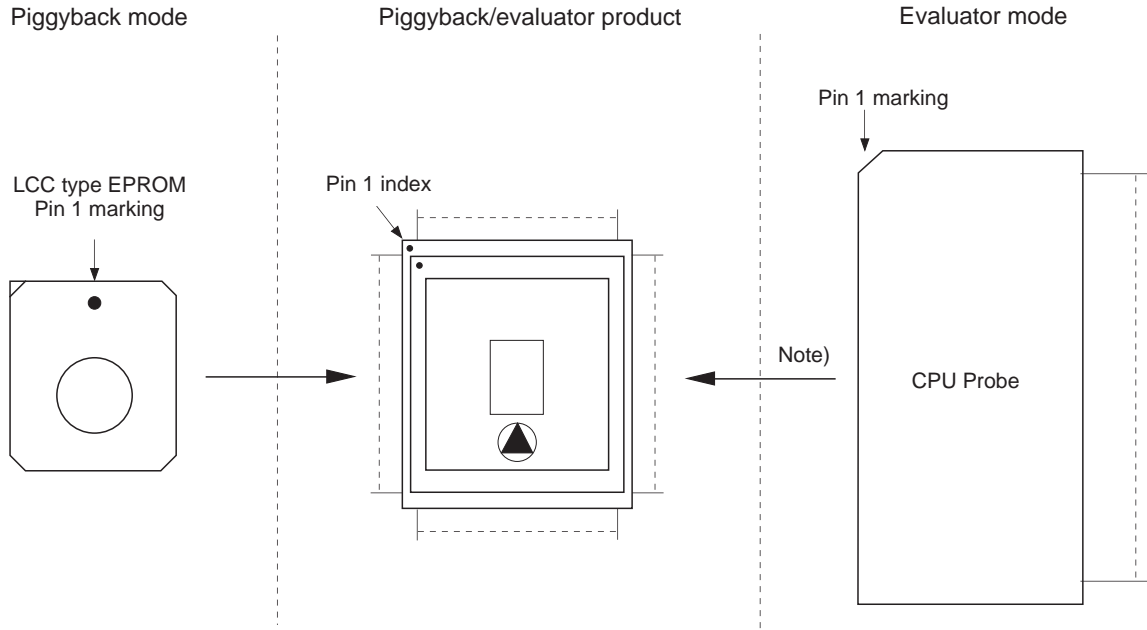

Note) Evaluation cap should be connected to CPU probe.

Package Outline Unit: mm

80PIN PQFP (CERAMIC)

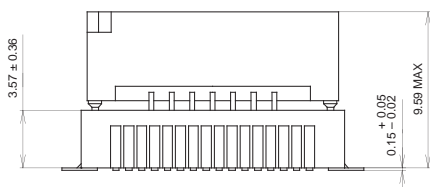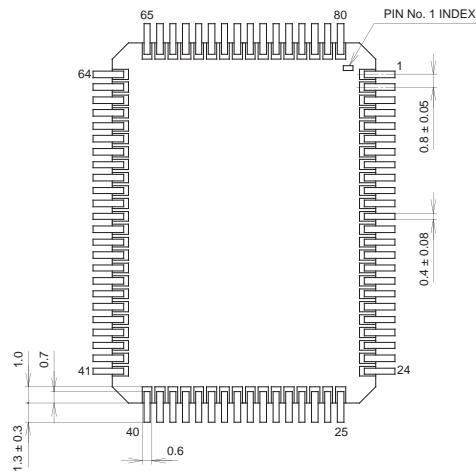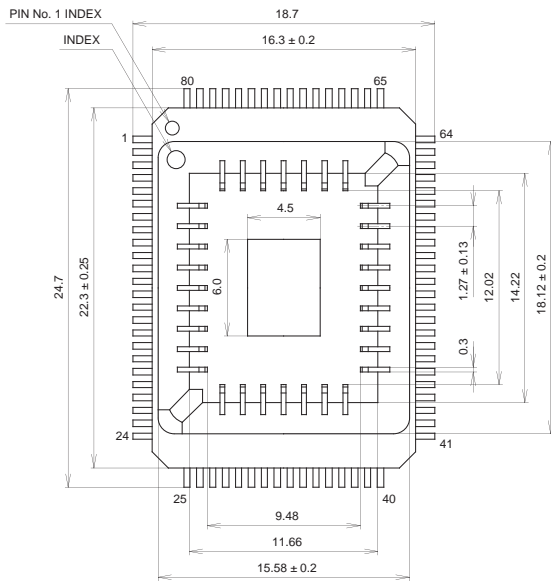

PACKAGE STRUCTURE

PACKAGE MATERIAL	CERAMIC
LEAD TREATMENT	GOLD PLATING
LEAD MATERIAL	42 ALLOY
PACKAGE WEIGHT	5.7g

SONY CODE	PQFP-80C-L01
EIAJ CODE	AQFP080-C-0000-A
JEDEC CODE	