

□ MN103000

Type	MN103000
Command RAM (×64-bit)	16 K-byte
Data RAM (×32-bit)	16 K-byte
Package (Conventional Package)	QFP160-P-2828F *Lead-free (QFP160-P-2828B)
Minimum Instruction Execution Time	17 ns (at 3.3 V to lerrance = ± 5%, 60 MHz)
Interrupts	• RESET • IRQ × 8 • NMI • Timer × 28 • SIF × 4 • DMAC × 4 • WDT • A/D • System error
Timer Counter	<p>Timer counter 0 to 3: 32-bit × 1 (interval timer, event count, timer output, interrupt, clock source for serial I/F, A/D conversion trigger) Clock Source IOCLK; external clock input; underflow of timer counter Interrupt Source underflow of timer counter 0, 1, 2, 3</p> <p>Timer counter 4 to 7: 32-bit × 1 (interval timer, event count, timer output, interrupt, clock source for serial I/F) Clock source IOCLK; external clock input; underflow of timer counter Interrupt source underflow of timer counter 4, 5, 6, 7</p> <p>*: Configuration of each of timer counters 0 to 3 and timer counters 4 to 7 can be changed to 8-, 16- and 24-bit timer counters.</p> <p>Timer counter 8: 16-bit × 1 (interval timer, event count, toggle output (2 lines), PWM output, one-shot output, input capture (2 lines), interrupt, DMA start, generation of timer synchronous output timing) Clock source IOCLK; external clock input; underflow of timer counter Interrupt source overflow of timer counter 8; coincidence with compare capture (2 lines) or at capture</p> <p>Timer counter 9: 16-bit × 1 (interval timer, event count, toggle output (2 lines), PWM output, high-speed PWM output, one-shot output, input capture (2 lines), interrupt, DMA start, generation of timer synchronous output timing) Clock source IOCLK; external clock input; underflow of timer counter Interrupt source overflow of timer counter 9; coincidence with compare capture (2 lines) or at capture</p> <p>Timer counter 10: 16-bit × 1 (interval timer, event count, toggle output (3 lines), PWM output (2 lines), one-shot output, input capture (3 lines), interrupt, DMA start, 2-phase encode) Clock source IOCLK; external clock input; 2-phase encode; underflow of timer counter Interrupt source overflow of timer counter 10; underflow of timer counter 10; coincidence with compare capture (3 lines) or at capture</p> <p>Timer counter 11: 16-bit × 1 (interval timer, event count, toggle output (4 lines), PWM output, inter-offset 3-phase PWM output, one-shot output, input capture (4 lines), interrupt, DMA start, 2-phase encode) Clock source IOCLK; external clock input; 2-phase encode; underflow of timer counter Interrupt source overflow of timer counter 11; underflow of timer counter 11; coincidence with compare capture (4 lines) or at capture</p> <p>Timer counter 12: 16-bit × 1 (interval timer, event count, toggle output (4 lines), PWM output (3 lines), one-shot output, input capture (4 lines), interrupt, 2-phase encode) Clock source IOCLK; external clock input; 2-phase encode; underflow of timer counter Interrupt source overflow of timer counter 12; underflow of timer counter 12; coincidence with compare capture (4 lines) or at capture</p>

Timer Counter (continue)	Watchdog timer: 16-bit to 25-bit × 1		
Serial Interface	Serial 0, 1: 7-bit, 8-bit × 2 (clock synchronous mode, start-stop synchronous mode, I ² C mode) Clock source: (clock synchronous mode, start-stop synchronous mode) IOCLK; underflow of timer counter; external clock (I ² C mode) IOCLK; underflow of timer counter		
I/O Pins	I/O	51	• Common use
	Output	25	• Common use
	Input	13	• Common use
A/D Inputs	10-bit × 8-ch.		
PWM	16-bit × 5-ch.		
ICR	16-bit × 15-ch. (common with OCR)		
OCR	16-bit × 15-ch. (common with ICR)		
Timer Synchronous Output	4-bit (synchronous output) × 2-ch.		
DMAC	4-ch.		

Electrical Characteristics**Supply current**

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	VDD , PVDD , AVDD = 3.3 V VI = VDD or VSS , fosc = 15.0 MHz FRQS pin = Hi level Output open			250	mA
Supply current at SLEEP	IDD2	VDD , PVDD , AVDD = 3.465 V VI = VDD or VSS , fosc = 15.0 MHz FRQS pin = Hi level Output open			50	mA
Supply current at HALT	IDD3	VDD , PVDD , AVDD = 3.465 V VI = VDD or VSS , fosc = 15.0 MHz FRQS pin = Hi level Output open			5	mA
Supply current at stopping	IDD4	VDD , PVDD , AVDD = 3.465 V VI = VDD or VSS , Fosc = Oscillation stopped Output open			300	μA

(Ta = -20°C to +70°C)

See the next page for electrical characteristics (continue), pin assignment and support tool.

Electrical Characteristics (Continue)


A/D conversion performance

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Resolution					10	Bits
A/D conversion absolute error		VREF+ = 3.3 V, VREF- = 0.0 V			± 7	LSB
A/D conversion relative error		A/D conversion clock = 5 MHz			± 5	LSB
A/D conversion time			2.8			μs

(Ta = -20°C to +70°C, AVDD = 3.3 V, AVSS = 0.0 V)

Pin Assignment

() : Conventional Package

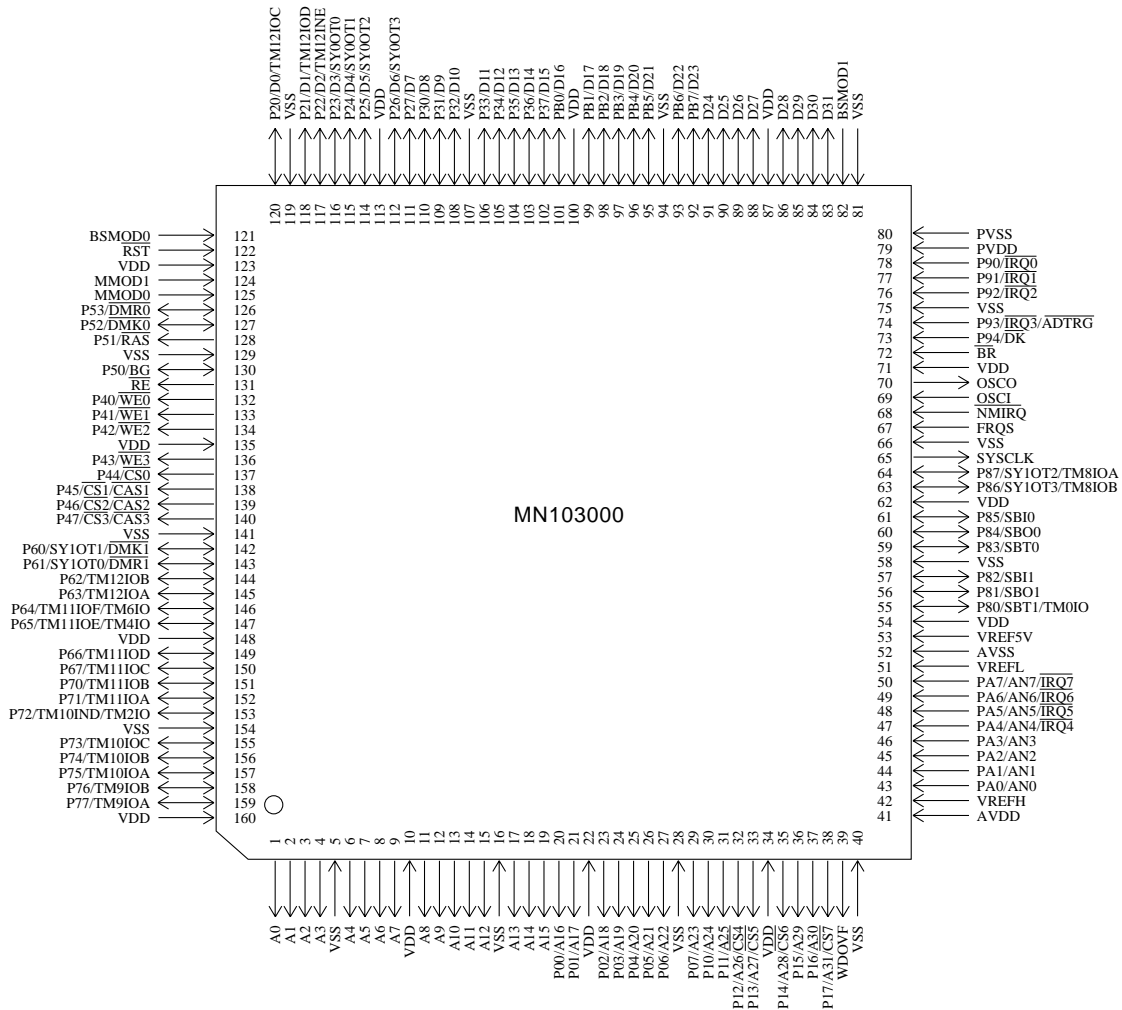

QFP160-P-2828F *Lead-free

(QFP160-P-2828B)

Support Tool

In-circuit Emulator

PX-ICE103000-QFP160-P-2828B

On-board Development Tools

CSIDE-MN10300 (Computex Co., Ltd, product)

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.