



LA7790M

QPSK Transmitter for Cable TV

Overview

The LA7790M is a QPSK data transmitter for digital cable TV applications. By integrating the I/Q quadrature modulator, RF amplifier, electronic volume control, mute control, and other functions onto a single chip, parts count is reduced and set size is miniaturized.

- Varactor diode-based VCO
- Muting
- Electronic volume control
- Power-saving modes
- Switchable output frequency range
- Power supply voltage of 5 V (4.5 to 5.5 V)

Features

- Maximum RF amplifier output level of +10 dBm (75Ω terminator), suitable for directly driving the cable.
- RF output frequency range of 5 to 70 MHz. Frequency range selection function permits broadband designs.
- Electronic volume control for direct-current control of RF output level.
- Muting ensures ample attenuation during periods with no transmission.
- Support for both internal and external bias for I/Q modulation inputs.
- Support for I/Q modulation frequencies up to 10 MHz. (typ: 500 mVp-p)



Functions

- I/Q quadrature modulator
- I/Q input bias power supply
- RF amplifier

Package Dimensions

unit: mm

3108-MFP24D

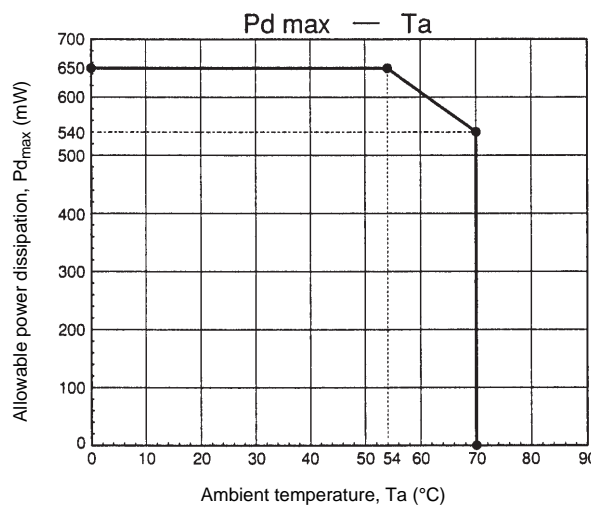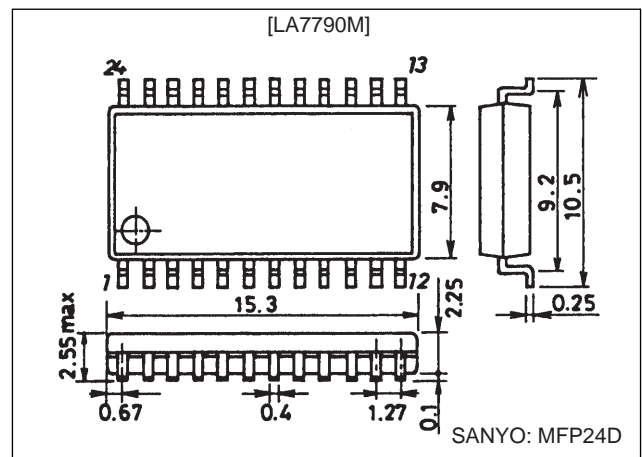

LA7790M

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum power supply voltage	$V_{CC\text{ max}}$	Pins 1, 10, and 24	7	V
Circuit voltage	V_{max}	Pins 1, 12, 17, 20, 21, and 23	V_{CC}	V
Circuit current	I_{11}	Output lead-in current	1	mA
	I_{19}		2	mA
Allowable power dissipation	$P_{d\text{ max}}$	$T_a \leq 54^\circ\text{C}$	650	mW
Operating ambient temperature	T_{opr}		-20 to +70	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Recommended Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Operating power supply voltage	$V_{CC\text{ op}}$	Pins 1, 10, and 24	4.5 to 5.5	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current drain						
Circuit current 1	I_1	With no signal, pin 1	26	33	44	mA
Circuit current 2	$I_{24} + I_{10}$	With no signal, pins 24 and 10	44	55	73	mA
Modulator fo: $f(V_{19}) = 25\text{ MHz}$						
Output frequency range	$f_{(V_{19})}$		5		70	MHz
Output signal level	$V_{19(\text{DSB})}$	Note 1: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	-7	-4	-2	dBm
Output harmonic distortion	$V_{19(\text{HD2})}$	Note 2: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	40			dB
	$V_{19(\text{HD3})}$		35			dB
Output secondary harmonic distortion	$V_{19(2f_o)}$	Note 3: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	20			dB
Output tertiary harmonic distortion	$V_{19(3f_o)}$	Note 3: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	8			dB
Carrier suppression ratio	$V_{19(f_o)}$	Note 4: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	30			dB
Sideband suppression ratio	$V_{19(\text{SSB})}$	Note 5: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{21} = V_{CC}$, $S1 = A$	30			dB
I input level	$V_{4,5}$	$V_{4,5} = V_4 - V_5 $		500		mVp-p
Q input level	$V_{8,9}$	$V_{8,9} = V_8 - V_9 $		500		mVp-p
I input DC voltage	$V_{4,5}$	External DC bias voltage	1.9	2.1	2.3	V
Q input DC voltage	$V_{8,9}$	External DC bias voltage	1.9	2.1	2.3	V
Reference voltage	V_6	Internal DC bias voltage	1.9	2.1	2.3	V
Variable attenuator						
Minimum gain control voltage	V_{21}	$V_{12} = V_{17} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	0		0.5	V
Gain range	$V_{19(\text{GR})}$	Note 6: $V_{20} = V_{23} = \text{GND}$, $V_{12} = V_{17} = V_{CC}$, $S1 = A$, $V_{21} = V_{CC} \rightarrow 0.5\text{ V}$	45			dB
Modulator output impedance	R_{19}	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	80	120	160	Ω
VCO						
Oscillator frequency range	$f_{(\text{osc})}$	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	20		280	MHz
VCO output level	$V_{11(f_o)}$	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	500	700	900	mVp-p
VCO output impedance	R_{11}	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	200	300	400	Ω
Band switch						
Band switch 1 "H" level $f(V_{19}) = 25\text{ MHz}$	V_{17H}	Note 7: $V_{12} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	4			V
Band switch 1 "L" level $f(V_{19}) = 12.5\text{ MHz}$	V_{17L}	Note 7: $V_{12} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$			1	V


Continued on next page.

LA7790M

Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Band switch 2 "H" level $f(V_{11}) = 25 \text{ MHz}$	V_{12H}	Note 7: $V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$	4			V
Band switch 2 "L" level $f(V_{11}) = 12.5 \text{ MHz}$	V_{12L}	Note 7: $V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $S1 = A$			1	V
RF output amplifier						
Maximum output level	$V_1 \text{ max}$	Note 8: $V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $SG3 = -6 \text{ dBm}$, $S1 = A$	7	10	13	dBm
Maximum output distortion	$V_{1(HD2)}$	Note 8: $V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = V_{23} = \text{GND}$, $SG3 = -6 \text{ dBm}$, $S1 = A$	40			dBc
	$V_{1(HD3)}$		40			dBc
Muting						
Muting on voltage	V_{23H}	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = \text{GND}$, $S1 = B$	4			V
Muting off voltage	V_{23L}	$V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = \text{GND}$, $S1 = B$			1	V
Muting attenuation	$V_{1(\text{mute})}$	Note 9: $V_{23} = 1 \text{ V} \rightarrow 4 \text{ V}$ $V_{12} = V_{17} = V_{21} = V_{CC}$, $V_{20} = \text{GND}$, $S1 = B$	70			dB
Power save function						
Power save on voltage	V_{20H}		4			V
Power save off voltage	V_{20L}				1	V
Power save current	I_1	Note 10: $V_{20} = 4 \text{ V}$	0		0.1	mA

Pin Assignment

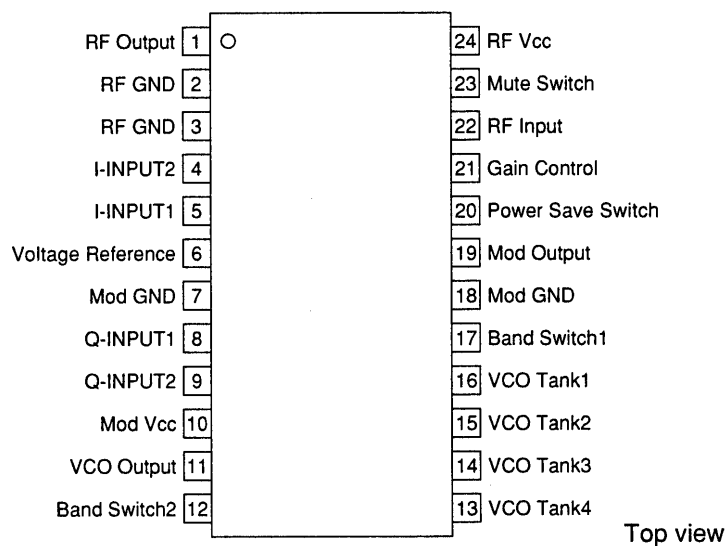


LA7790M

Note 1

Input: SG1 = 1 MHz CW, 500 mVp-p, SG2 = No Signal or
SG2 = 1 MHz CW, 500 mVp-p, SG1 = No Signal

Output:




A09628

Note 2

Input: Same as Note 1

Output:

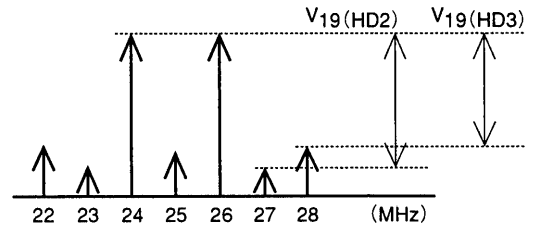


A09629

Note 3

Input: Same as Note 1

Output:

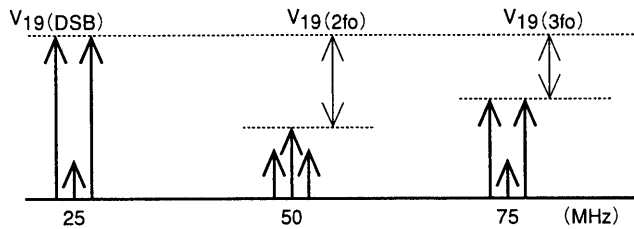


A09630

Note 4

Input: SG1 = SG2 = 1 MHz CW, 500 mVp-p

Output:




A09631

Note 5

Input: SG1 = 1 MHz CW, 500 mVp-p, 0deg
SG1 = 1 MHz CW, 500 mVp-p, 90deg

Output:




A09628

Note 6

Input: SG1 = 1 MHz CW, 500 mVp-p

Output:

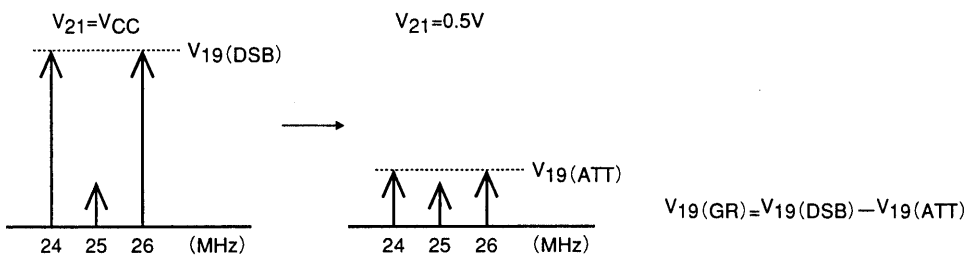


A09633

LA7790M

Note 7

Input: SG1 = 1 MHz CW, 500 mVp-p


Output:

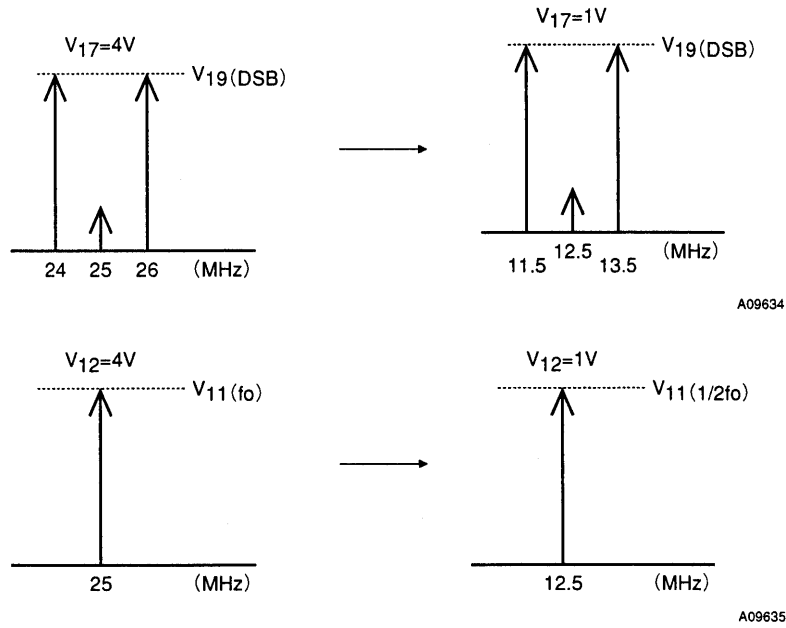

Note 8

Input: SG3 = 25 MHz CW, -6 dBm


Output:

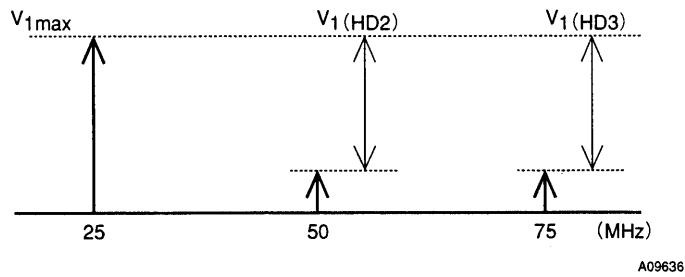

Note 9

Input: SG1 = 1 MHz CW, 500 mVp-p

Output:

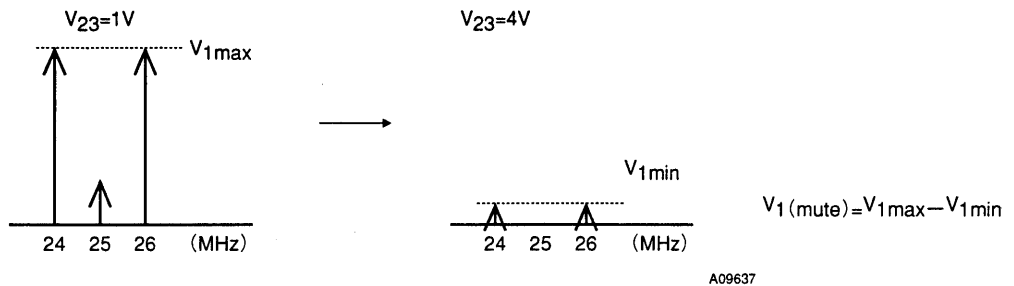


Note 10


I_1 = pin 1 current when $V_{20} = 4 V$ (power save on).

Measurement Circuit

A09638

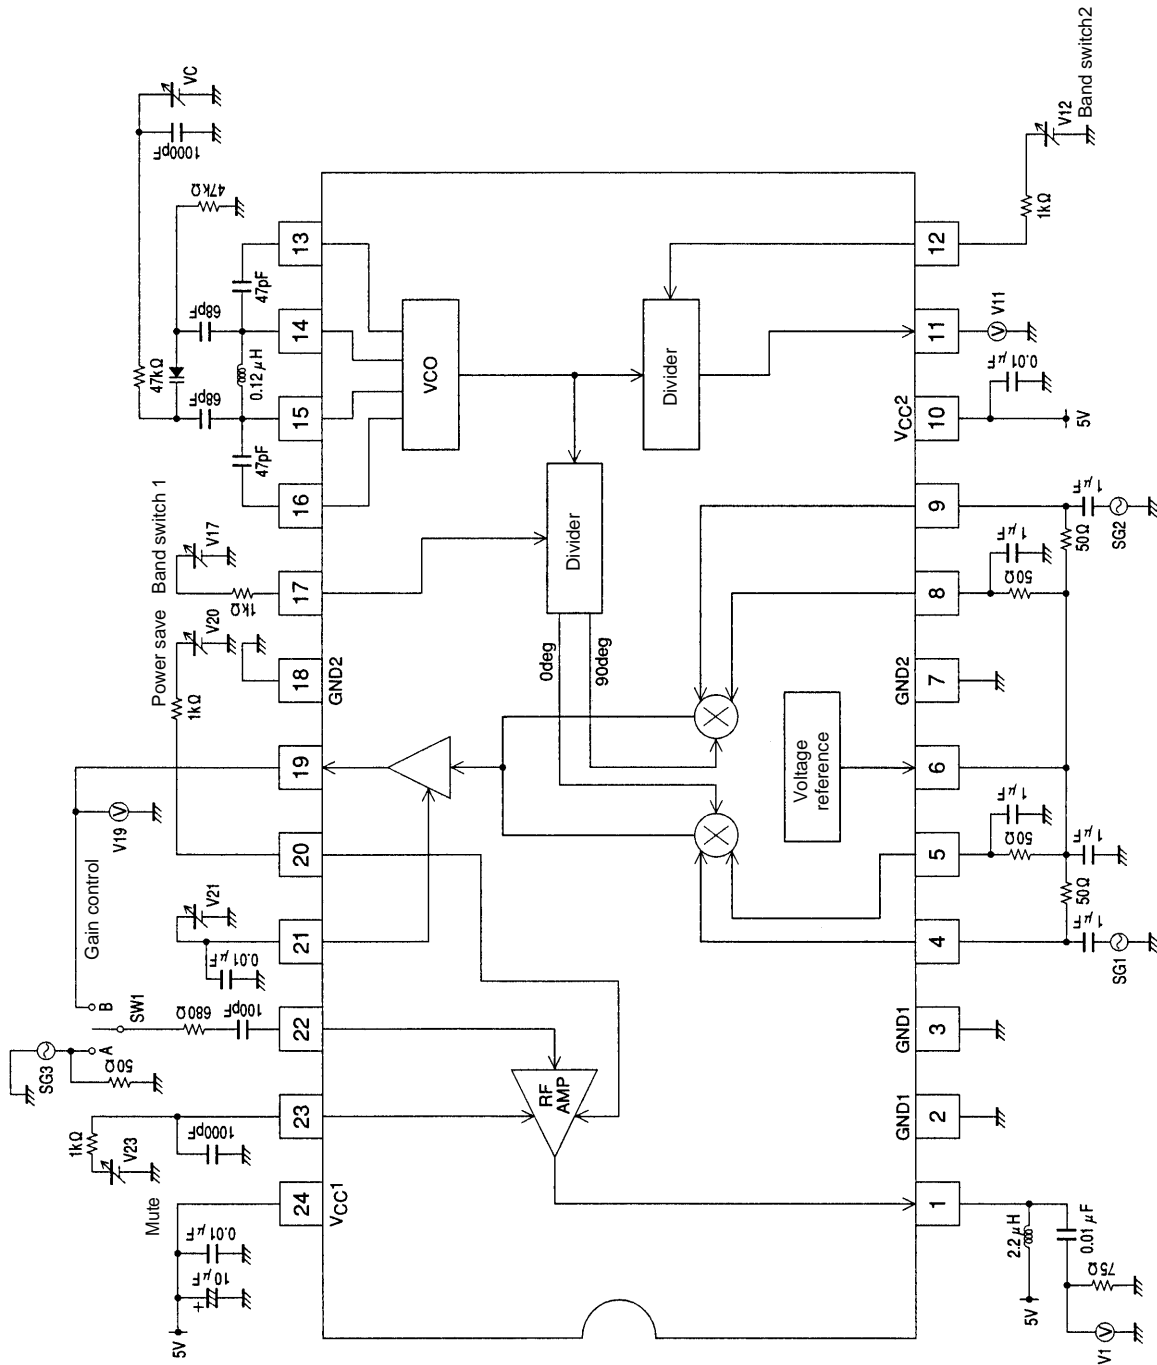

Sample Application Circuit

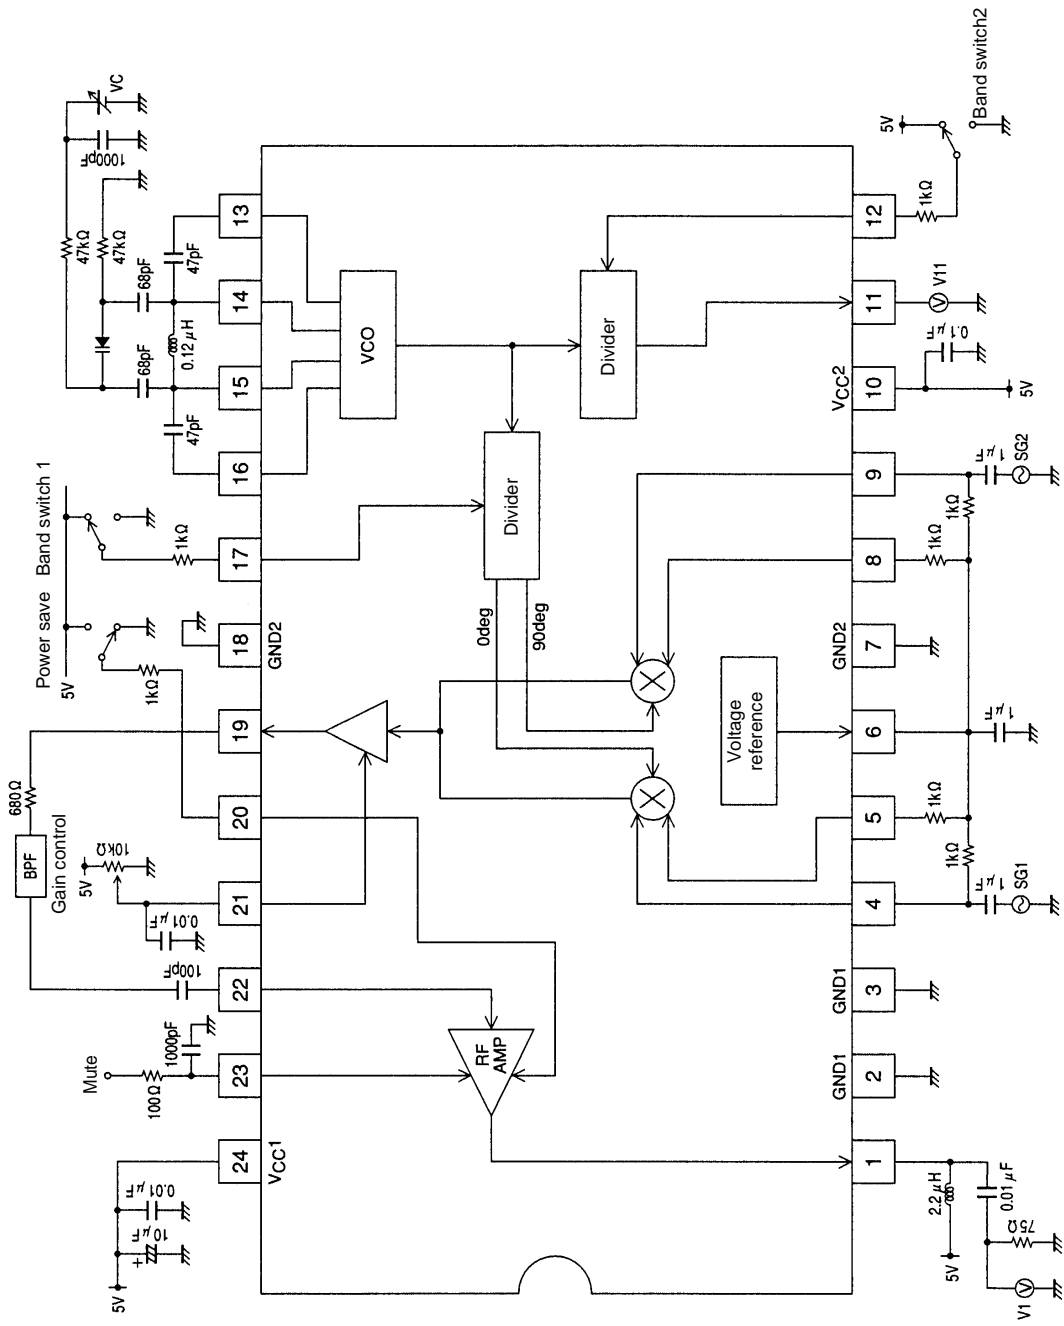


A09639

LA7790M


1. Modulator

The modulator consists of two identical multiplier circuits, creating I and Q channels. Pins 4 & 5 and pins 8 & 9 are I and Q channel inputs, respectively. These pins must be biased at 2.1 ± 0.2 V. Pin 6 is an internal 2.1 V bias. This internal bias can be used if the I & Q data inputs are AC coupled, but an external bias must be used in the case of DC coupled data inputs. Carrier suppression is improved if the offset voltages between pins 4 & 5 and pins 8 & 9 are small.


(1) AC coupled application

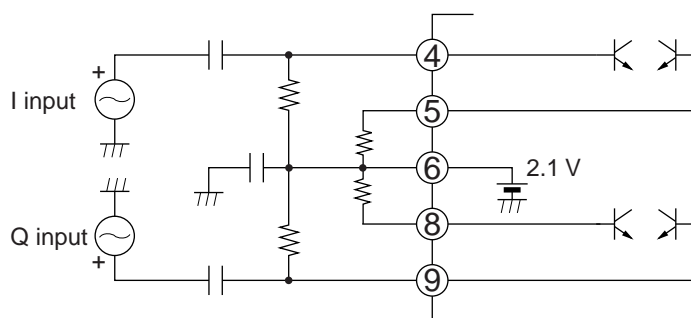

(2) DC coupled application

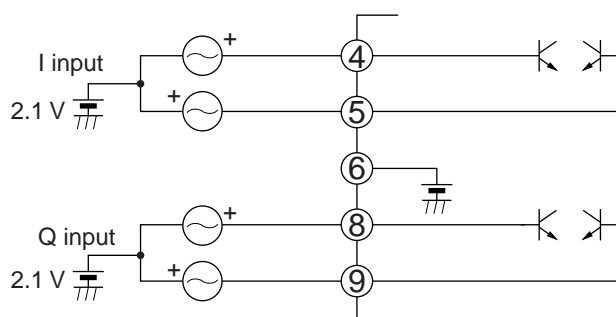

Equivalent circuit of RF amplifier block

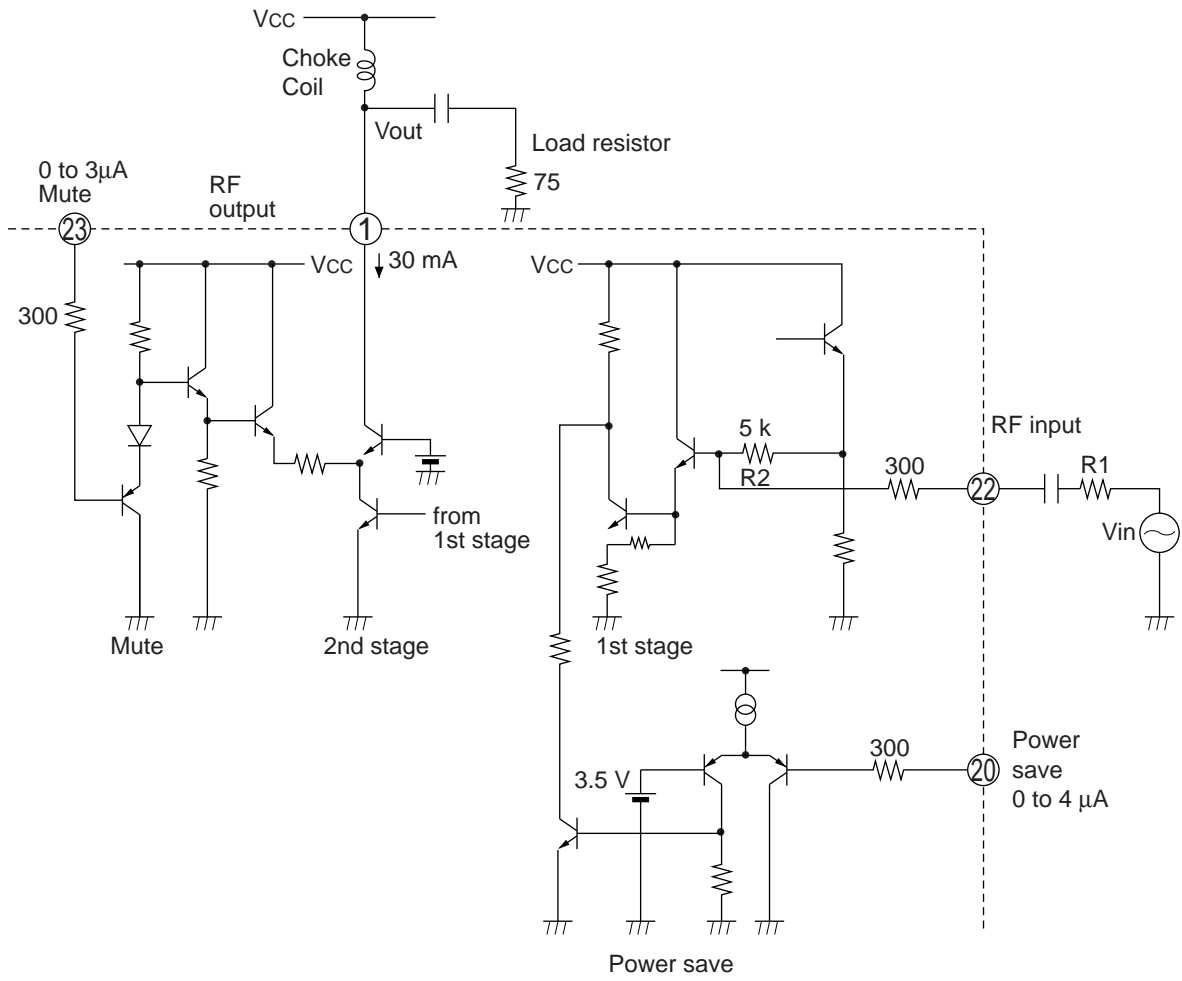

$$\text{RF Amplifier Gain} \approx \frac{R1 + R2 + 300}{R1 + 300} \quad R1 : \text{Input Resistor}$$

The gain of RF amplifier can be adjusted by changing the value R1.

Unit (resistance : Ω)

4. Oscillator


The oscillator signal is divided by either 4 or 8, and supplied to the modulator as 0° and 90° switching signals. The division mode can be selected using Band Switch 1 (pin 17).

Pin 17 = High → Modulation frequency = 1/4 oscillator frequency

Pin 17 = Low → Modulation frequency = 1/8 oscillator frequency

The oscillator requires an external coil and capacitors. Pins 14 & 15 should be DC coupled using a coil. A coil with Qu of 30 or greater is required and the impedance between pins 14 and 15 is 6 kΩ. The value of the coupling capacitors between pins 13 & 14 and pins 15 & 16 must be large enough so that the signal phase rotation is small.

Equivalent circuit of oscillator block

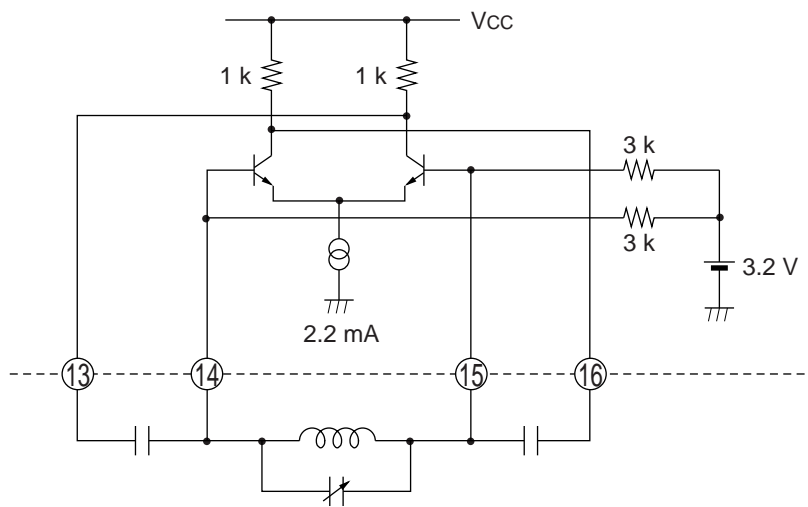


Unit (resistance : Ω)

7. Digital ECL Circuit

To get the correct $0^\circ/90^\circ$ phase switching signal for the modulator, a divide-by-four dual flip-flop is employed as shown in the following figure.

Band Switch 1 can be used to expand the range of the modulation frequency. Band Switch 2 can be used to select the frequency to output to an external PLL.

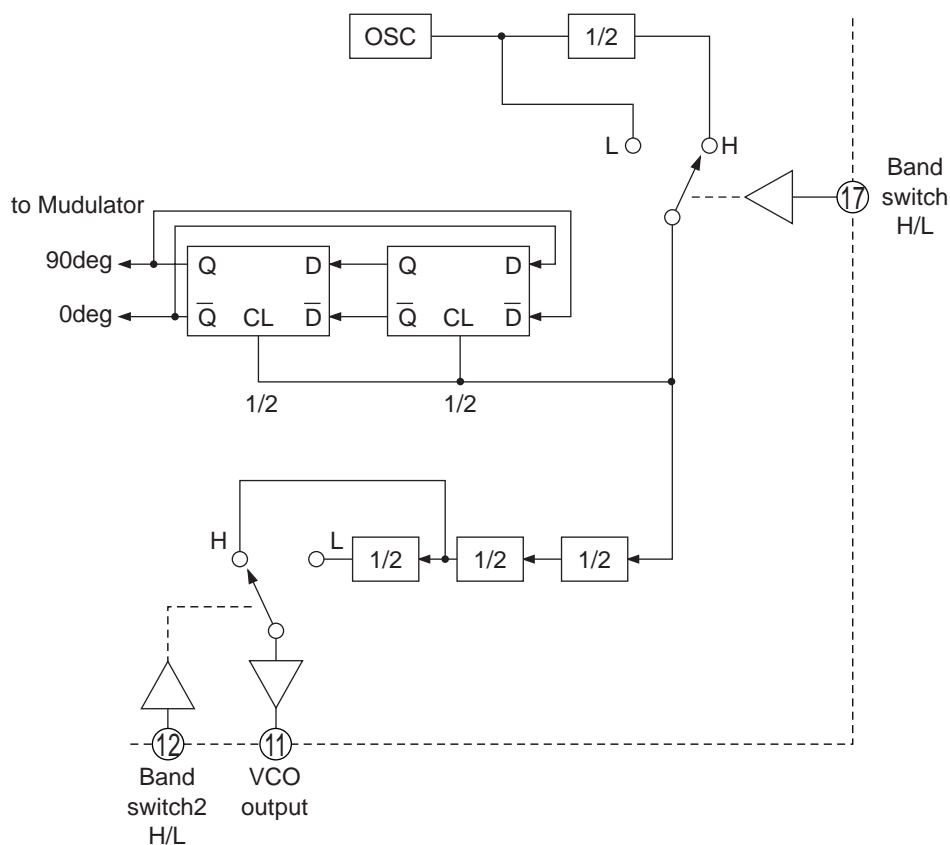

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.