

## Features

- DC to DC Step Down 1.2 A, 0.9V (Dynamically Adjustable to 0.87V/1.1V/1.2V)
- DC to DC step Down 1.2 A, 1.2V (Dynamically Adjustable to 1.0V/1.1V/1.3V) or 1.75V (Dynamically Adjustable 1.65V/1.70V/1.80V)
- DC to DC Step Down 1.2 A, 1.8V (Dynamically Adjustable to 1.70V/1.75V/1.85V) or 2.5V (Dynamically Adjustable 2.3V/2.4V/2.6V)
- DC to DC Step Up/Down 520 mA, 3.3V (Dynamically Adjustable to 3.0V/3.1V/3.4V)
- Dual Battery Chargers: Li+ Precharge, Fast Charge, Top-up Charge, 4.1V (or Adjustable), Processor Tuned Algorithms
  - USB Trickle Charge: Precharge Flat Battery from USB Pre-enumeration, then Auto-wake of Processor at 3.8V Battery Level
  - Battery Charge Select: 25 mA to 500 mA
  - Real-time Charge Inhibit: Allows Charge Suspend (e.g. During TX Slots)
- Supply Monitor of Four Power Sources: Thermistors, Temperature, DC/DC Rails, all Supplied with Out-of-regulation Threshold Detection
- SIM Interface: SIM / USIM, 1.8V / 3.0V Standards, Integrated TX and RX Data FIFO
- SPI Control Interface: Up to 13 MHz; Tuned for SA1110/PXA250/PXA255 1.2 MHz SPI, 128 8-bit Registers
- Power on Reset: For SA1110/PXA250/PXA255 Architectures plus Additional Sequenced System Level Resets
- Voltage and Temperature Supervision
- Calibrated Voltage Reference
- 8-bit ADC with 5-input Multiplexer
- Integrated Oscillator, Start-up and Self-protection Circuitry
- Off Power: 60  $\mu$ A with External "Button Select" for Restart
- Applications Include: PDAs, PCMCIA Cards, SMART Phones, Pocket PCs, 3G Applications, Intel<sup>®</sup> XScale<sup>™</sup> Powered Applications

## Description

The AT73C203 device provides an integrated solution to portable and handheld applications built around microprocessors requiring "smart" power management functions, such as PDAs, Palmtop computers, point-of-sales terminals, 3G modems, etc.

Its compact package outline and small size of external components make the AT73C203 suitable for PCMCIA card power management as well.

The AT73C203 integrates a power switch controller that, when connected to an external power switch, may be used for automatically selecting one of four possible power sources:

- Internal battery
- External battery
- Plugtop power supply unit 5V (PSU)
- PC Host USB supply

The power switch output (VDD-PSU line) is connected directly to external auxiliary components such as a radio or any other "current hungry" module.

The AT73C203 is also equipped with four digital rails from VDD-PSU to supply a baseband chip, a reset generator for the baseband chip, and a SPI interface to control the AT73C203 via an internal register set. The USIM interface allows the application processor to communicate with and control a USIM card. Charge control enables the application processor to charge the battery from the PSU or USB. A state machine can also determine whether to charge the internal battery through USB at start-up. Additionally, hardware monitoring gives information to the application processor when a voltage drop occurs (programmed via internal registers).



## Power Management

## AT73C203 Power Management IC for Datacom Platforms

## Summary


2742BS-PMGMT-03/04



Note: This is a summary document. A complete document is available on our Web site at [www.atmel.com](http://www.atmel.com).

# Functional Diagram

Figure 1. AT73C203 Functional Diagram

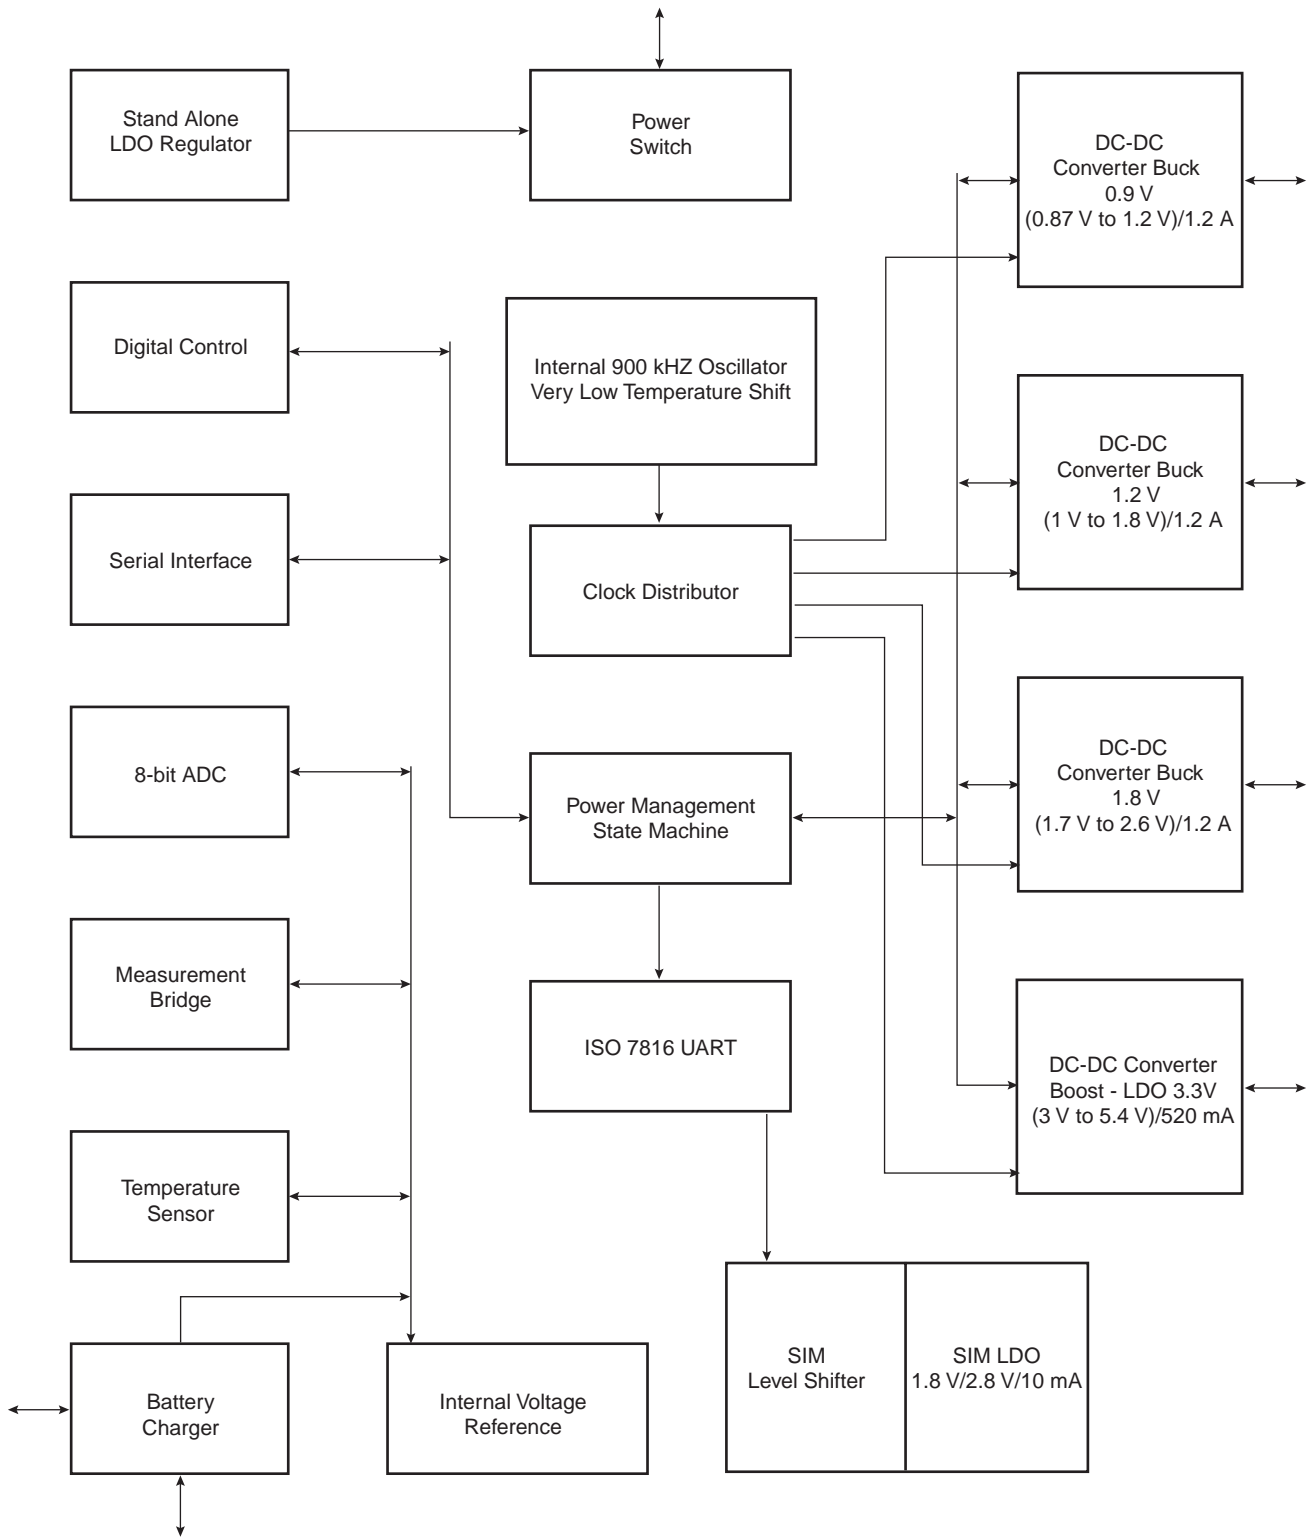



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

## Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2004. All rights reserved. Atmel® and combinations thereof are the registered trademarks of Atmel Corporation or its subsidiaries. Intel® is the registered trademark of Intel Corporation, XSCALE™ is the trademark of Intel Corporation. Other terms and product names may be the trademarks of others.



Printed on recycled paper.

2742BS-PMGMT-03/04