



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

DESCRIPTION

RD07MVS1 is a MOS FET type transistor specifically designed for VHF/UHF RF power amplifiers applications.


FEATURES

- High power gain:
Pout>7W, Gp>10dB@Vdd=7.2V, f=520MHz
- High Efficiency: 60%typ. (175MHz)
- High Efficiency: 55%typ. (520MHz)

APPLICATION

For output stage of high power amplifiers in VHF/UHF band mobile radio sets.

OUTLINE DRAWING

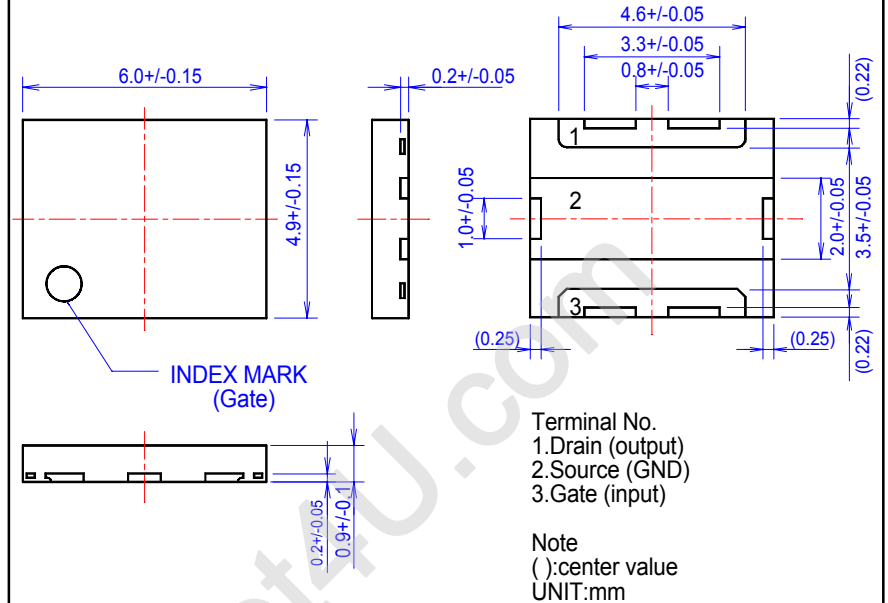

ABSOLUTE MAXIMUM RATINGS

(Tc=25°C UNLESS OTHERWISE NOTED)

| SYMBOL | PARAMETER | CONDITIONS | RATINGS | UNIT |
|---------|-------------------------|------------------|-------------|------|
| VDSS | Drain to source voltage | Vgs=0V | 30 | V |
| VGSS | Gate to source voltage | Vds=0V | +/- 20 | V |
| Pch | Channel dissipation | Tc=25°C | 50 | W |
| Pin | Input Power | Zg=Zl=50Ω | 1.5 | W |
| ID | Drain Current | - | 3 | A |
| Tj | Junction Temperature | - | 150 | °C |
| Tstg | Storage temperature | - | -40 to +125 | °C |
| Rth j-c | Thermal resistance | Junction to case | 2.5 | °C/W |

Note 1: Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C, UNLESS OTHERWISE NOTED)

| SYMBOL | PARAMETER | CONDITIONS | LIMITS | | | UNIT |
|--------|---------------------------------|---|------------|-----|------|------|
| | | | MIN | TYP | MAX. | |
| IDSS | Zero gate voltage drain current | VDS=17V, VGS=0V | - | - | 200 | μA |
| IGSS | Gate to source leak current | VGS=10V, VDS=0V | - | - | 1 | μA |
| VTH | Gate threshold Voltage | VDS=12V, IDS=1mA | 1.4 | 1.7 | 2.4 | V |
| Pout1 | Output power | f=175MHz, VDD=7.2V | 7 | 8 | - | W |
| ηD1 | Drain efficiency | Pin=0.3W, Idq=700mA | 55 | 60 | - | % |
| Pout2 | Output power | f=520MHz, VDD=7.2V | 7 | 8 | - | W |
| ηD2 | Drain efficiency | Pin=0.7W, Idq=750mA | 50 | 55 | - | % |
| | Load VSWR tolerance | VDD=9.2V, Po=7W(PinControl) f=175MHz, Idq=700mA, Zg=50Ω Load VSWR=20:1(All Phase) | No destroy | | | - |
| | Load VSWR tolerance | VDD=9.2V, Po=7W(PinControl) f=520MHz, Idq=750mA, Zg=50Ω Load VSWR=20:1(All Phase) | No destroy | | | - |

Note : Above parameters , ratings , limits and conditions are subject to change.









ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

TYPICAL CHARACTERISTICS

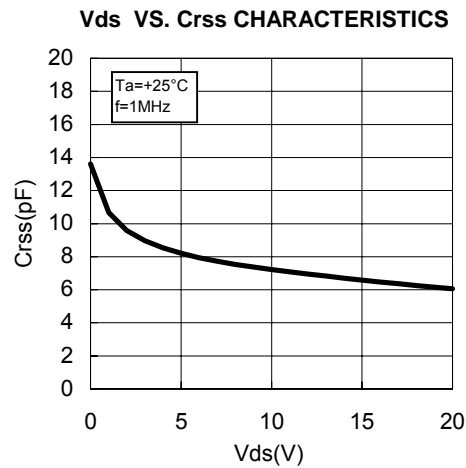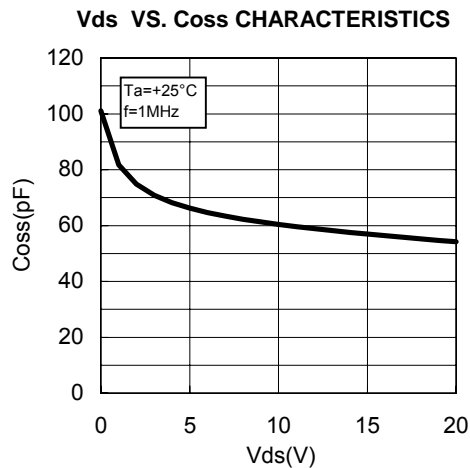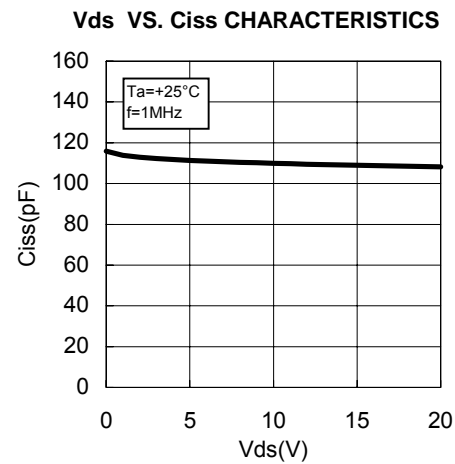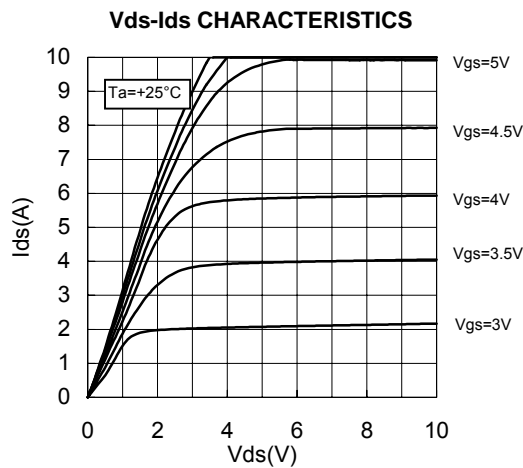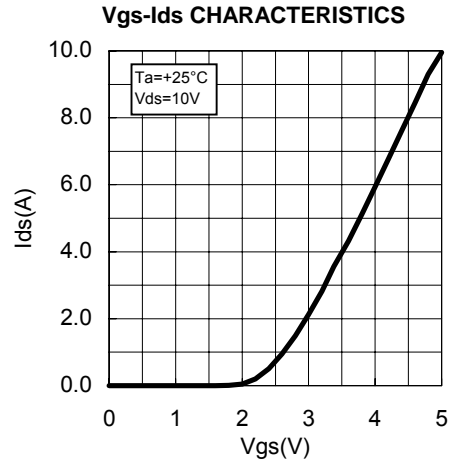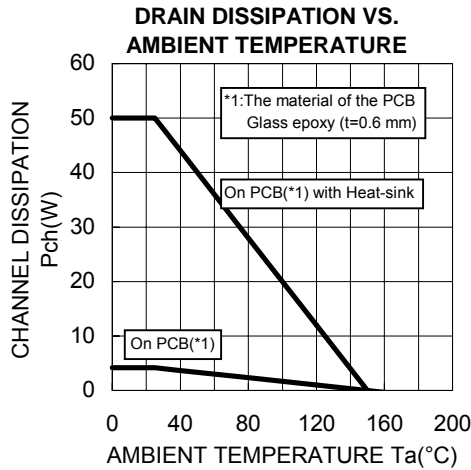



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD07MVS1


Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

TYPICAL CHARACTERISTICS


Pin-Po CHARACTERISTICS @f=175MHz

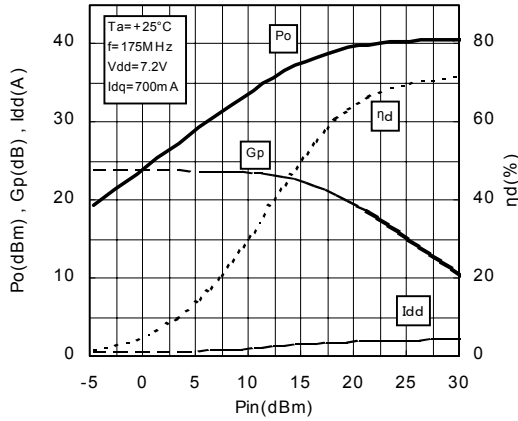


Pin-Po CHARACTERISTICS @f=175MHz

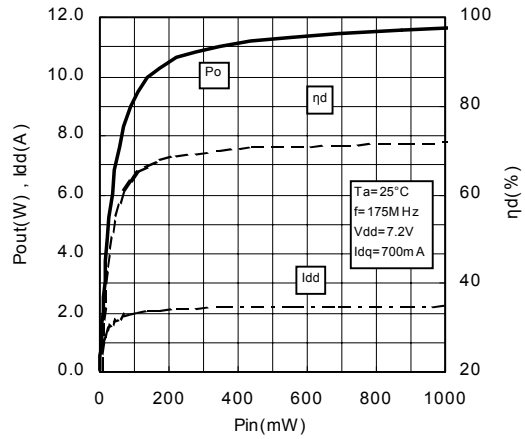


Pin-Po CHARACTERISTICS @f=520MHz

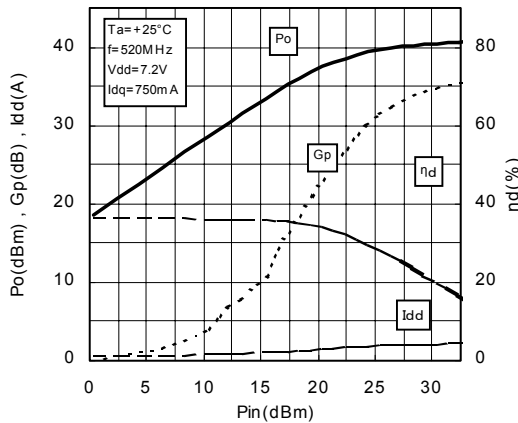


Pin-Po CHARACTERISTICS @f=520MHz

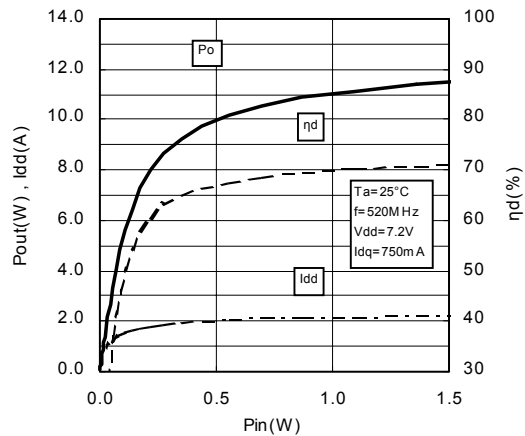

Vdd-Po CHARACTERISTICS @f=175MHz

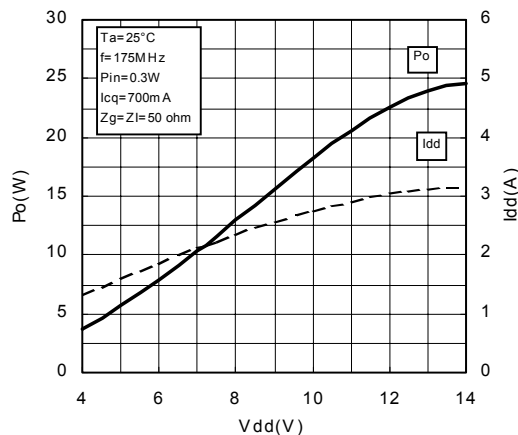

Vdd-Po CHARACTERISTICS @f=520MHz

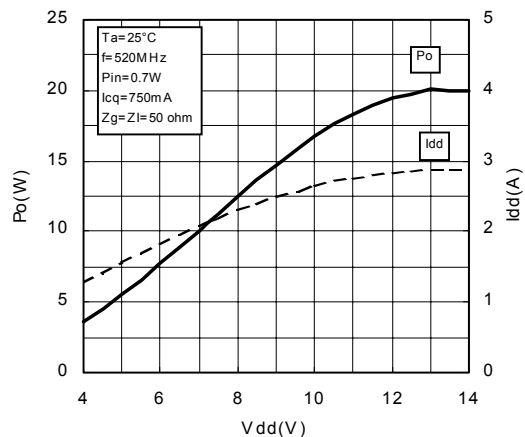




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

TYPICAL CHARACTERISTICS

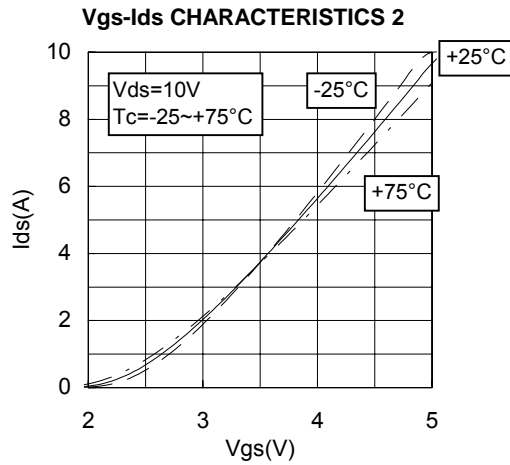




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

TEST CIRCUIT(f=175MHz)

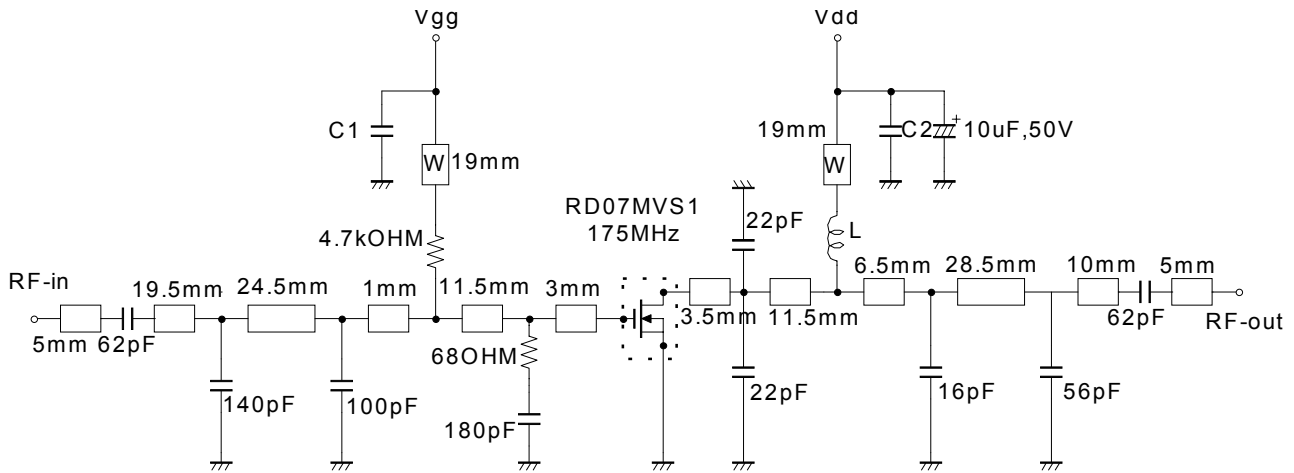

L: Enameled wire 7Turns, D:0.43mm, 2.46mm O.D


C1, C2: 1000pF, 0.022uF in parallel

Note: Board material- Teflon substrate

Micro strip line width=2.2mm/50OHM, er:2.7, t=0.8mm

W: line width=1.0mm

TEST CIRCUIT(f=520MHz)

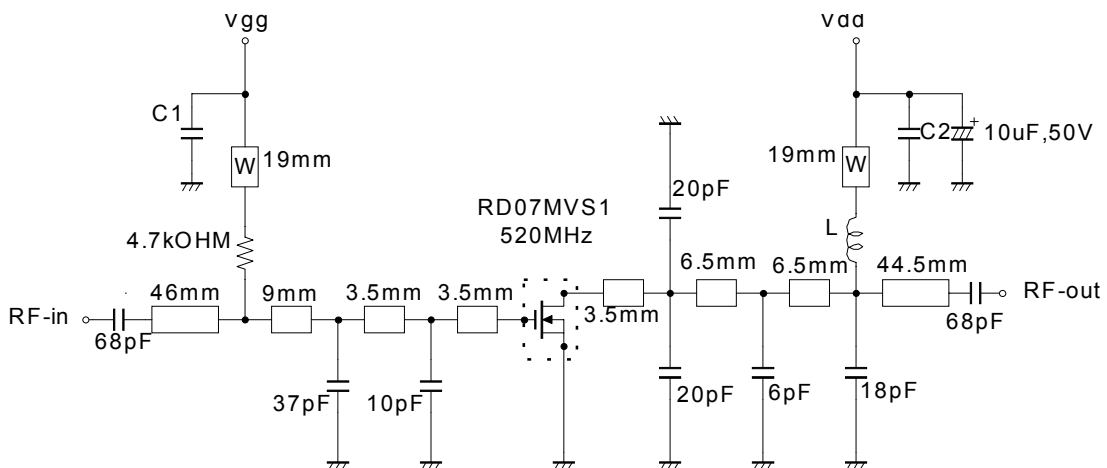

L: Enameled wire 5Turns, D:0.43mm, 2.46mm O.D

C1, C2: 1000pF, 0.022uF in parallel

Note: Board material- Teflon substrate

Micro strip line width=2.2mm/50OHM, er:2.7, t=0.8mm

W: line width=1.0mm



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

INPUT/OUTPUT IMPEDANCE VS. FREQUENCY CHARACTERISTICS

175MHz Z_{in}^* Z_{out}^*
 $Z_o=10\Omega$

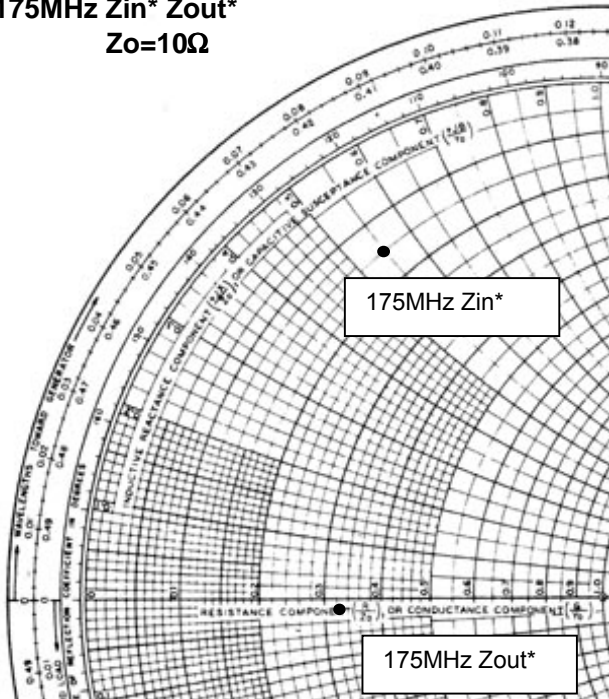


$V_{dd}=7.2V$, $I_{dq}=700mA$ (V_{gg} adj.), $P_{in}=0.28W$

$Z_{in}^*=1.55+j5.53$
 $Z_{out}^*=3.24-j0.26$

Z_{in}^* : Complex conjugate of input impedance
 Z_{out}^* : Complex conjugate of input impedance

520MHz Z_{in}^* Z_{out}^*
 $Z_o=10\Omega$

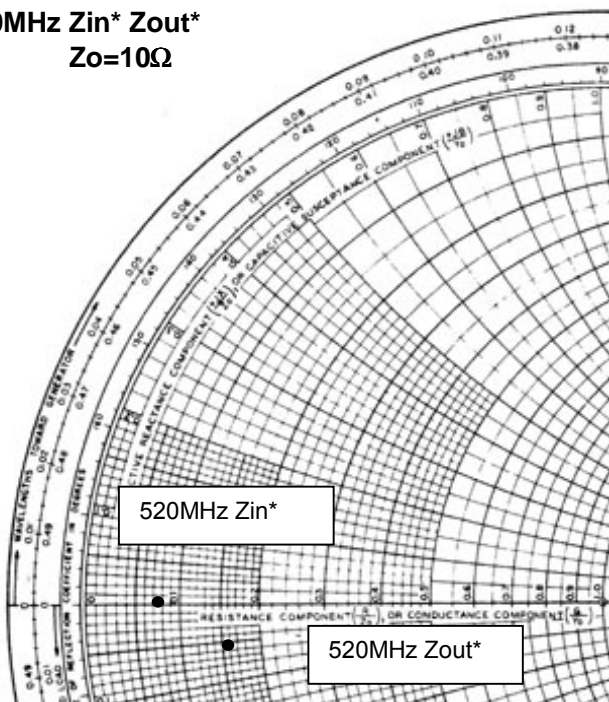

$V_{dd}=7.2V$, $I_{dq}=750mA$ (V_{gg} adj.), $P_{in}=0.7W$

$Z_{in}^*=0.76+j0.06$
 $Z_{out}^*=1.61-j0.52$

Z_{in}^* : Complex conjugate of input impedance
 Z_{out}^* : Complex conjugate of input impedance



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD07MVS1


Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

RD07MVS1 S-PARAMETER DATA (@Vdd=7.2V, Id=750mA)

| Freq. [MHz] | S11 | | S21 | | S12 | | S22 | |
|----------------|-------|--------|-------|-------|-------|-------|-------|--------|
| | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) |
| 100 | 0.890 | -174.1 | 5.508 | 82.1 | 0.016 | -3.6 | 0.790 | -172.8 |
| 150 | 0.897 | -175.6 | 3.613 | 75.0 | 0.015 | -8.5 | 0.801 | -174.0 |
| 175 | 0.899 | -176.0 | 3.028 | 72.4 | 0.015 | -9.6 | 0.802 | -174.1 |
| 200 | 0.901 | -176.3 | 2.604 | 70.1 | 0.014 | -10.9 | 0.815 | -174.0 |
| 250 | 0.907 | -176.7 | 2.019 | 65.6 | 0.014 | -12.7 | 0.844 | -174.1 |
| 300 | 0.913 | -177.0 | 1.614 | 60.7 | 0.012 | -15.3 | 0.843 | -174.1 |
| 350 | 0.918 | -177.3 | 1.308 | 57.1 | 0.011 | -15.8 | 0.860 | -174.4 |
| 400 | 0.924 | -177.8 | 1.102 | 54.1 | 0.010 | -14.2 | 0.879 | -175.0 |
| 450 | 0.928 | -178.0 | 0.929 | 50.1 | 0.009 | -14.8 | 0.882 | -175.1 |
| 500 | 0.933 | -178.3 | 0.790 | 48.6 | 0.008 | -9.6 | 0.895 | -175.5 |
| 520 | 0.935 | -178.5 | 0.753 | 47.6 | 0.007 | -7.7 | 0.901 | -175.8 |
| 550 | 0.937 | -178.8 | 0.692 | 45.3 | 0.007 | -5.6 | 0.906 | -176.2 |
| 600 | 0.940 | -179.2 | 0.595 | 43.6 | 0.006 | 0.4 | 0.907 | -176.6 |
| 650 | 0.942 | -179.4 | 0.529 | 42.4 | 0.006 | 17.1 | 0.916 | -177.2 |
| 700 | 0.944 | -179.8 | 0.467 | 40.2 | 0.005 | 21.8 | 0.923 | -177.6 |
| 750 | 0.947 | 179.8 | 0.416 | 39.4 | 0.005 | 40.9 | 0.921 | -178.0 |
| 800 | 0.948 | 179.4 | 0.374 | 38.6 | 0.004 | 52.0 | 0.930 | -178.8 |
| 850 | 0.949 | 179.0 | 0.343 | 37.6 | 0.005 | 67.1 | 0.933 | -178.9 |
| 900 | 0.951 | 178.6 | 0.304 | 36.5 | 0.005 | 72.6 | 0.932 | -179.3 |
| 950 | 0.951 | 178.2 | 0.284 | 37.6 | 0.006 | 85.8 | 0.937 | 179.8 |
| 1000 | 0.952 | 177.9 | 0.262 | 35.1 | 0.007 | 85.1 | 0.938 | 179.7 |
| 1050 | 0.950 | 177.4 | 0.234 | 36.0 | 0.008 | 89.8 | 0.938 | 179.3 |
| 1100 | 0.952 | 176.9 | 0.226 | 35.8 | 0.009 | 93.4 | 0.940 | 178.2 |

RD07MVS1 S-PARAMETER DATA (@Vdd=12.5V, Id=750mA)

| Freq. [MHz] | S11 | | S21 | | S12 | | S22 | |
|----------------|-------|--------|-------|-------|-------|-------|-------|--------|
| | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) | (mag) | (ang) |
| 100 | 0.883 | -172.1 | 6.013 | 81.0 | 0.017 | -5.3 | 0.748 | -170.4 |
| 150 | 0.891 | -174.1 | 3.914 | 72.8 | 0.016 | -10.7 | 0.765 | -171.4 |
| 175 | 0.894 | -174.6 | 3.269 | 69.8 | 0.016 | -13.1 | 0.769 | -171.4 |
| 200 | 0.897 | -175.0 | 2.798 | 67.2 | 0.015 | -14.9 | 0.786 | -171.3 |
| 250 | 0.906 | -175.6 | 2.144 | 62.1 | 0.014 | -18.3 | 0.822 | -171.4 |
| 300 | 0.914 | -176.0 | 1.697 | 56.9 | 0.012 | -20.4 | 0.828 | -171.6 |
| 350 | 0.920 | -176.4 | 1.361 | 53.0 | 0.011 | -21.6 | 0.848 | -172.0 |
| 400 | 0.927 | -177.0 | 1.134 | 49.9 | 0.010 | -21.2 | 0.871 | -172.9 |
| 450 | 0.932 | -177.4 | 0.949 | 45.8 | 0.009 | -21.8 | 0.876 | -173.2 |
| 500 | 0.937 | -177.8 | 0.800 | 44.2 | 0.007 | -16.9 | 0.892 | -173.7 |
| 520 | 0.938 | -178.0 | 0.761 | 43.2 | 0.007 | -16.0 | 0.898 | -174.1 |
| 550 | 0.940 | -178.3 | 0.697 | 41.1 | 0.006 | -13.3 | 0.904 | -174.6 |
| 600 | 0.944 | -178.8 | 0.594 | 39.3 | 0.005 | -7.2 | 0.906 | -175.1 |
| 650 | 0.946 | -179.1 | 0.527 | 38.2 | 0.004 | 4.5 | 0.917 | -175.9 |
| 700 | 0.948 | -179.5 | 0.464 | 36.1 | 0.004 | 17.4 | 0.924 | -176.3 |
| 750 | 0.950 | -179.9 | 0.412 | 35.5 | 0.004 | 28.0 | 0.922 | -176.9 |
| 800 | 0.951 | 179.6 | 0.368 | 34.5 | 0.004 | 56.9 | 0.931 | -177.8 |
| 850 | 0.953 | 179.2 | 0.336 | 33.6 | 0.004 | 66.4 | 0.934 | -178.0 |
| 900 | 0.954 | 178.8 | 0.297 | 32.3 | 0.005 | 78.3 | 0.933 | -178.3 |
| 950 | 0.954 | 178.4 | 0.276 | 33.8 | 0.006 | 87.4 | 0.939 | -179.4 |
| 1000 | 0.954 | 178.0 | 0.254 | 31.1 | 0.006 | 90.9 | 0.941 | -179.5 |
| 1050 | 0.952 | 177.5 | 0.226 | 32.2 | 0.007 | 94.7 | 0.940 | -179.9 |
| 1100 | 0.954 | 177.0 | 0.219 | 32.0 | 0.008 | 98.0 | 0.943 | 178.9 |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET

RD07MVS1

Silicon MOSFET Power Transistor, 175MHz, 520MHz, 7W

—Keep safety first in your circuit designs! —

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

warning !

Do not use the device at the exceeded the maximum rating condition. In case of plastic molded devices, the exceeded maximum rating condition may cause blowout, smoldering or catch fire of the molding resin due to extreme short current flow between the drain and the source of the device. These results causes in fire or injury.