

# HMC538LP4 / 538LP4E


**600° ANALOG PHASE SHIFTER,  
6 - 15 GHz**

## Typical Applications

The HMC538LP4 / HMC538LP4E is ideal for:

- Fiber Optics
- Military
- Test Equipment

## Functional Diagram

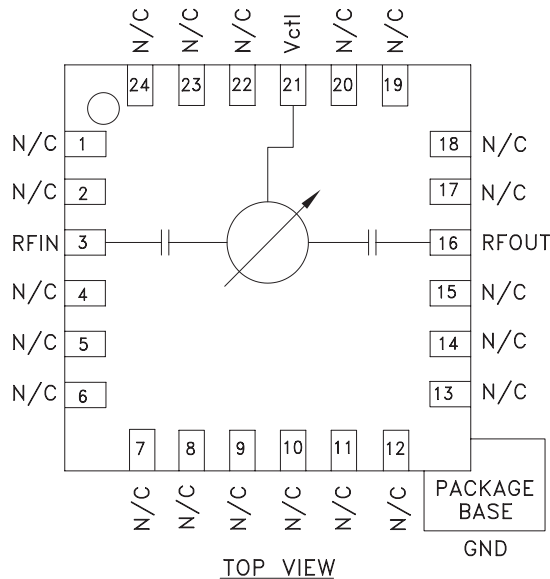

## Features

- Available as Lead Free
- Wide Bandwidth: 6 - 15 GHz
- >600° Phase Shift
- Single Positive Voltage Control
- QFN Leadless SMT Package, 16 mm<sup>2</sup>


## General Description

The HMC538LP4 & HMC538LP4E are Analog Phase Shifters which are controlled via an analog control voltage from 0 to +5V. The HMC538LP4 & HMC538LP4E provide a continuously variable phase shift of 0 to 800 degrees at 6 GHz, and 0 to 450 degrees at 16 GHz, with consistent insertion loss versus phase shift. The phase shift is monotonic with respect to control voltage. The control port has a modulation bandwidth of 50 MHz. The low insertion loss and compact size enable this part to be used in a wide range of applications, including the phase adjustment of clocks in fiber optic systems and test equipment. The HMC538LP4 & HMC538LP4E are housed in leadless QFN surface mount packages and are available in both standard and RoHS compliant versions.


## Electrical Specifications, $T_A = +25^\circ\text{C}$ , 50 Ohm System

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Phase Shift Range	6 - 10 GHz	600	800		degrees
	10 - 15 GHz	360	600		degrees
Insertion Loss	6 - 15 GHz		8	11	dB
Return Loss (Input and Output)	6 - 15 GHz		7		dB
Control Voltage Range	6 - 15 GHz		0 - 5		Volt
Modulation Bandwidth	6 - 15 GHz		50		MHz
Phase Voltage Sensitivity	6 - 15 GHz		120		deg /Volt
Insertion Phase Temperature Sensitivity	6 - 15 GHz		0.5		deg /°C


**Insertion Loss vs. Control Voltage @ 11 GHz**

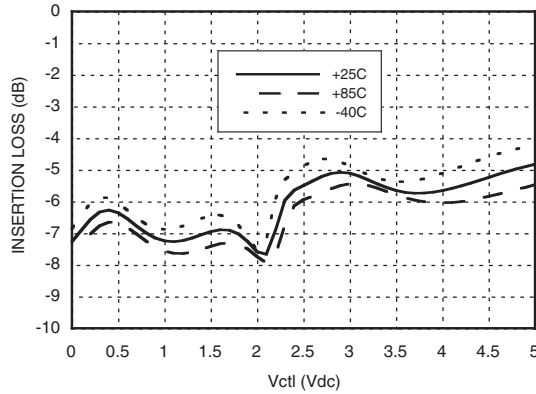


**Phase Shift vs. Control Voltage**

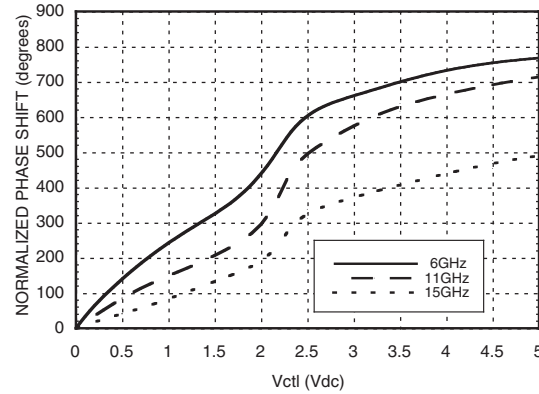


**Phase Shift vs. Frequency @ V<sub>ctl</sub> = 5V  
(Relative to V<sub>ctl</sub> = 0V)**

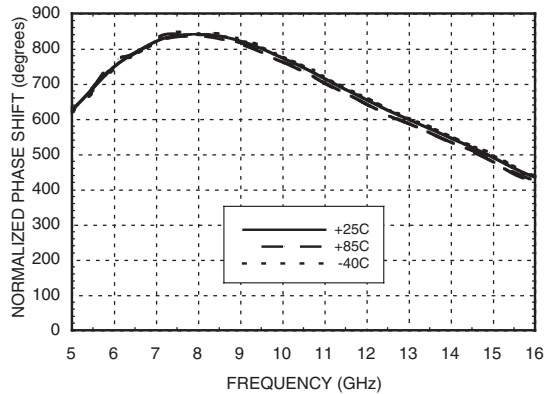


**Insertion Loss vs. Frequency**

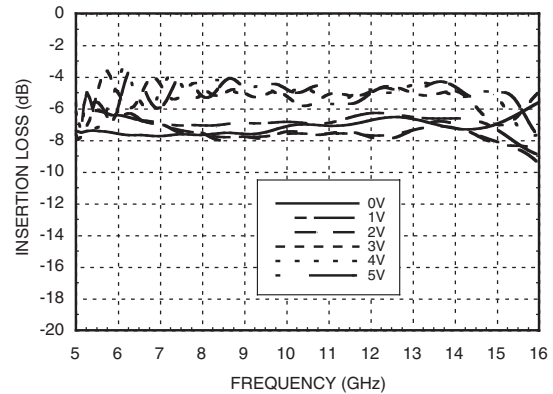

**Input Return Loss vs. Frequency,  
V<sub>ctl</sub> = 0 to +5V**

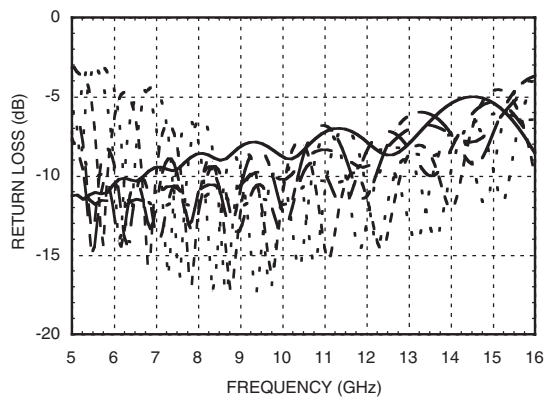

**Output Return Loss vs. Frequency,  
V<sub>ctl</sub> = 0 to +5V**

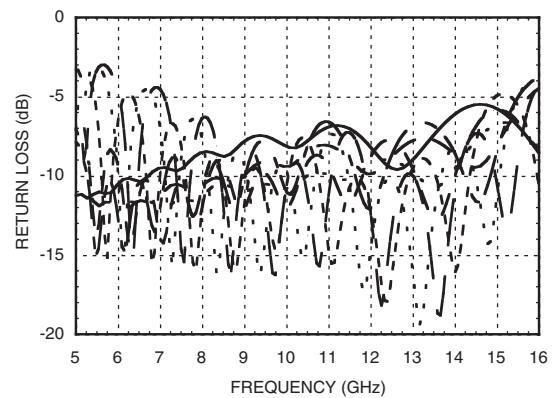





# HMC538LP4 / 538LP4E

## 600° ANALOG PHASE SHIFTER, 6 - 15 GHz


### Second Harmonics vs. Control Voltage, Pin = -10 dBm

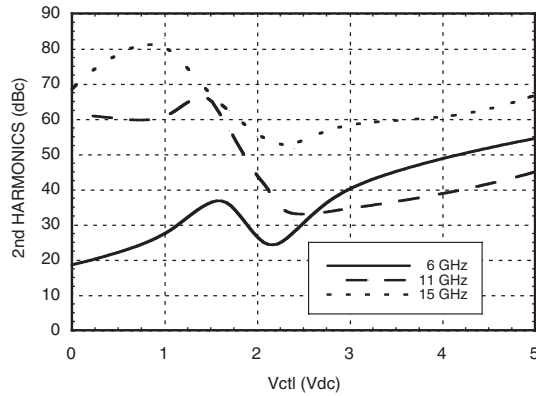


### Input IP3 vs. Control Voltage

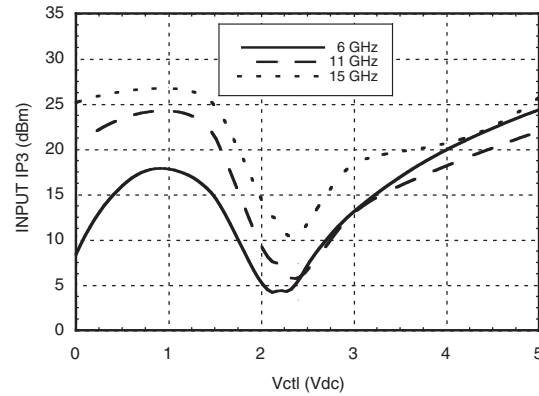


### Insertion Loss vs. Pin @ 7 GHz

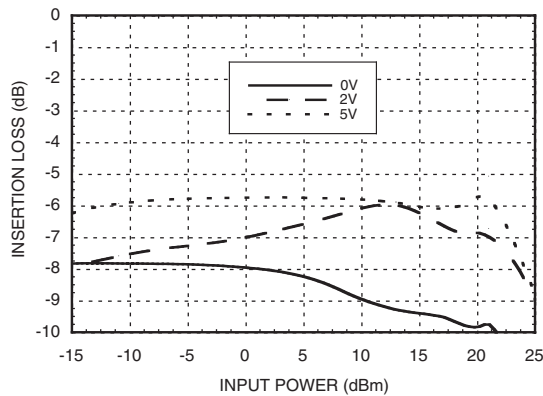


### Insertion Loss vs. Pin @ 11 GHz

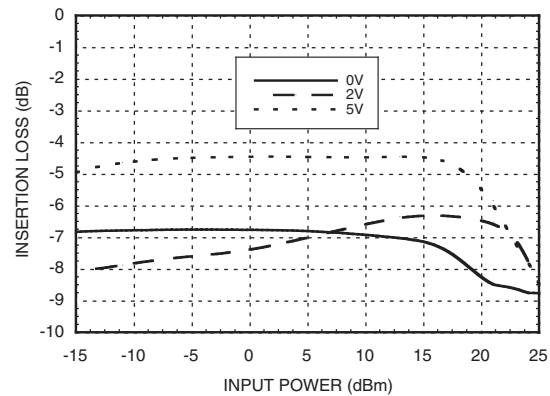

### Insertion Loss vs. Pin @ 15 GHz

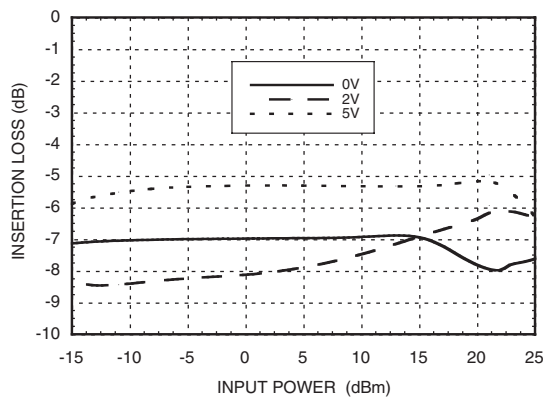

### Phase Shift vs. Pin @ 7 GHz

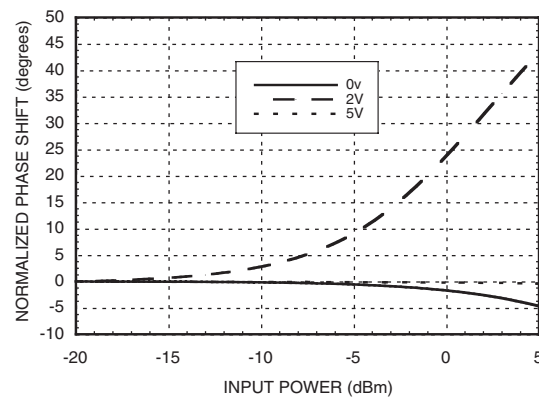




MICROWAVE CORPORATION v00.0505




## HMC538LP4 / 538LP4E

600° ANALOG PHASE SHIFTER,  
6 - 15 GHz

Phase Shift vs. Pin @ 11 GHz

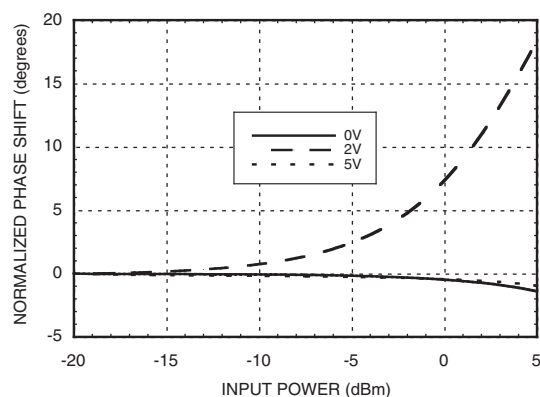

Phase Shift vs. Pin @ 15 GHz

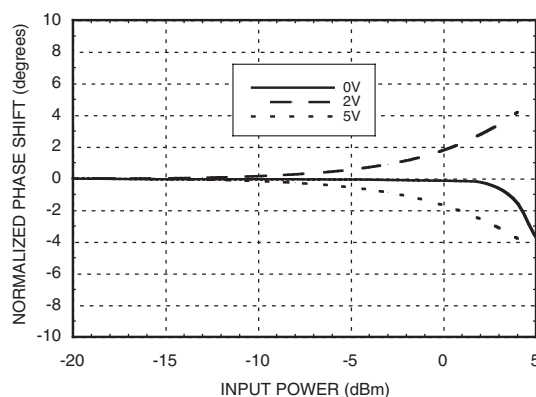

### Absolute Maximum Ratings


Control Voltage (Vctl)	-1 Vdc to + 8 Vdc
Input Power (RFin)	+25 dBm
Channel Temperature (Tc)	150 °C
Continuous Pdiss (T = 85 °C) (derate 21 mW/°C above 85 °C)	1.36 W
Thermal Resistance (junction to ground paddle)	48 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1B

14

SWITCHES - SMT



### Evaluation PCB

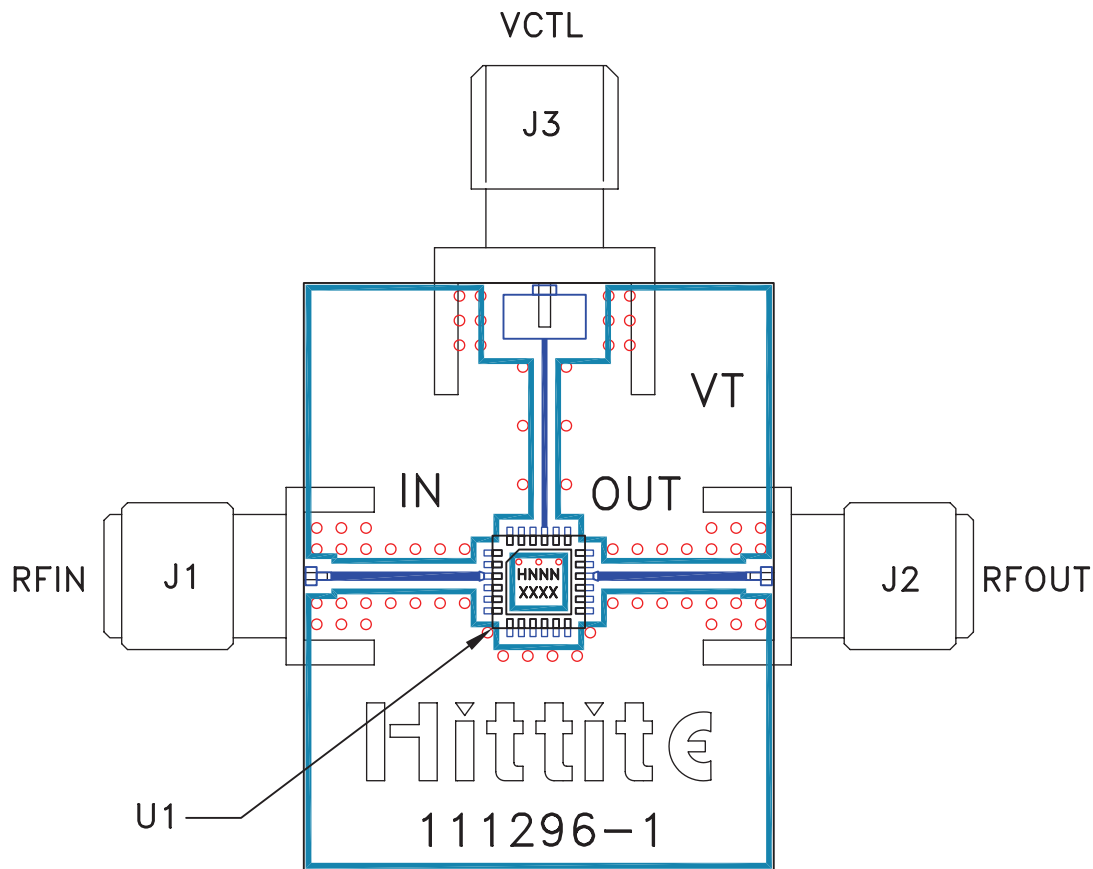

### List of Material for Evaluation PCB 108812 <sup>[1]</sup>

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC538LP4 / HMC538LP4E Analog Phase Shifter
PCB [2]	111296 Eval Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of VIA holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.