

HA12441V

Narrow Band Width FM-IF


The HA12441V is an IC designed for narrow band width FM-IF. It provides the following functions and features.

Functions

- Local Oscillator
- Mixer
- IF Amplifier
- FM Detector
- Electric Field-strength Detector
- Operational Amp (Filter Amplifier)
- Squelch Trigger


Features

- The smaller sized P.C.B. by applying vertical type package
- Wide range supply voltage operation
- Small quiescent current (4.2 mA typ)
- Small external parts count
- Possible to use both the noise squelch by the operational amplifier and electric field-strength squelch
- Small electrical characteristics change to supply voltage change
- The HA12442V pin compatible with this device for operation over frequency specification range of 10.7 MHz to 58 MHz

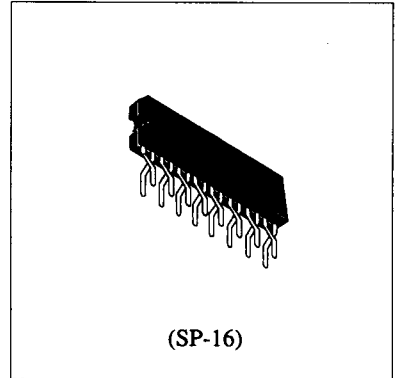


HA12441V


Cordless Telephone Block-Diagram Portable Unit

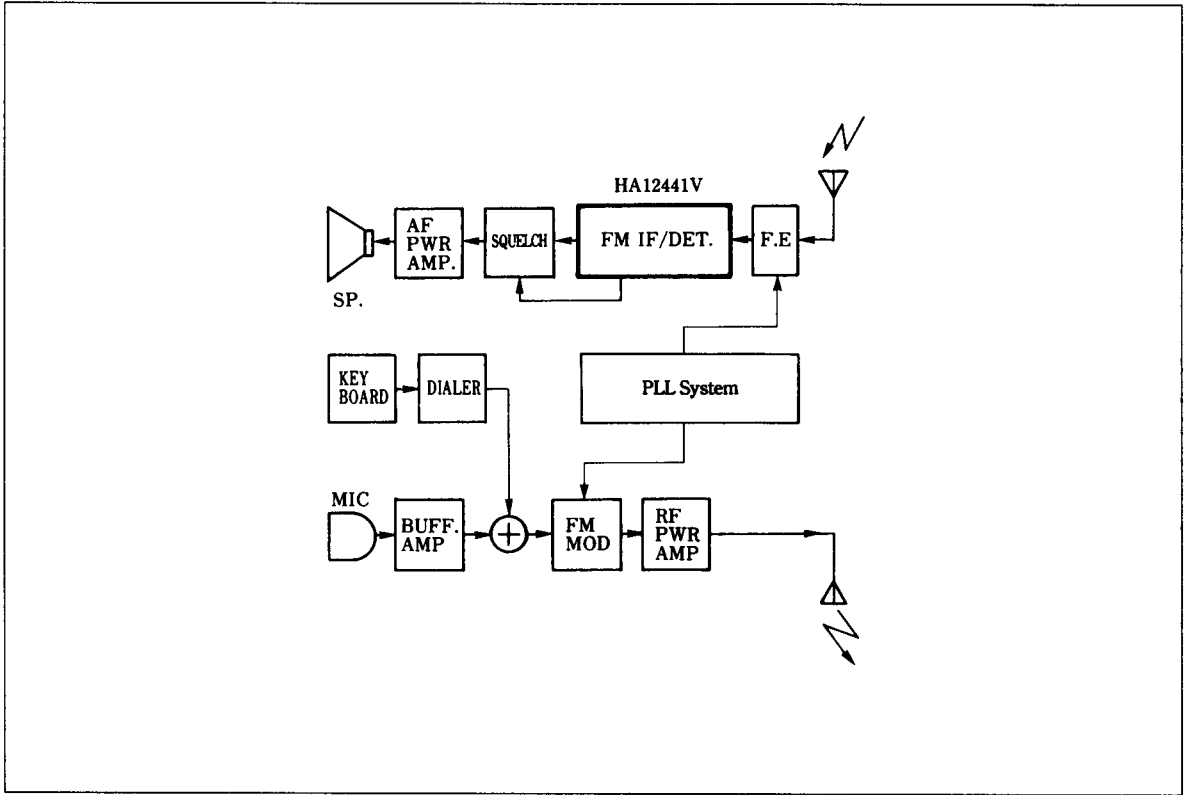

Base Unit

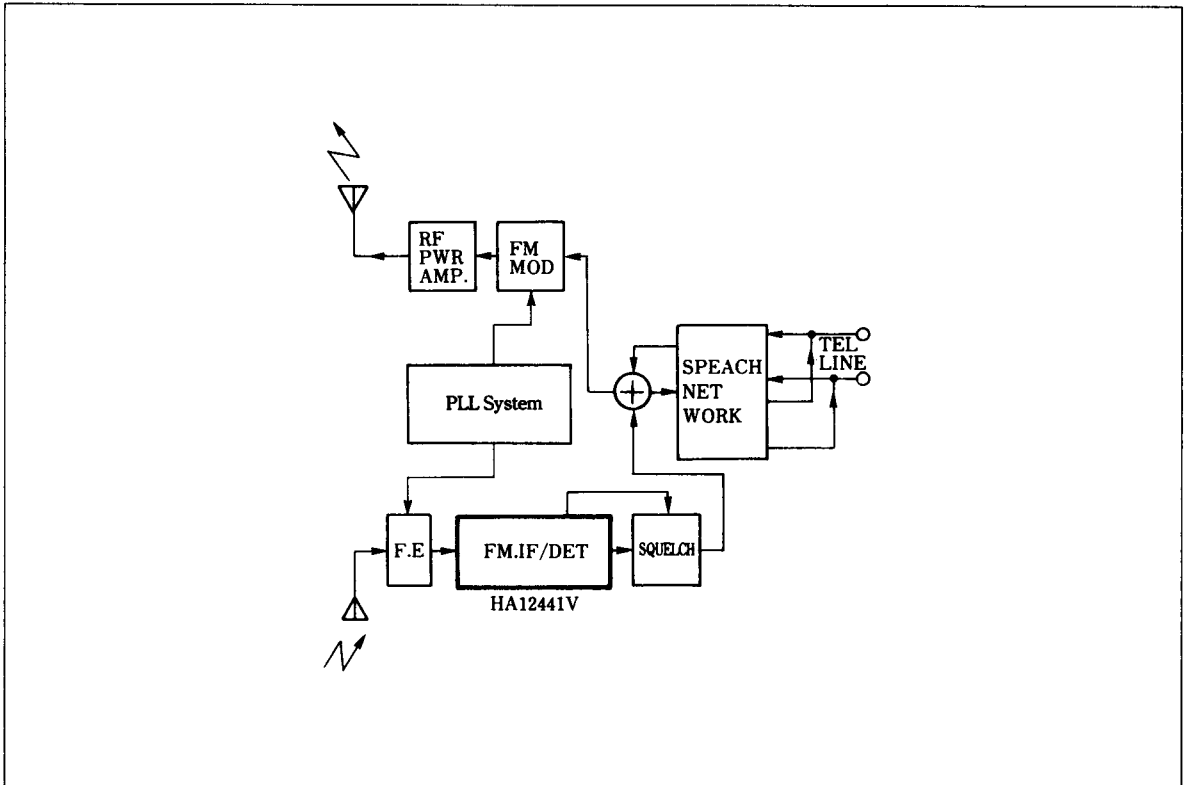

Block Diagram

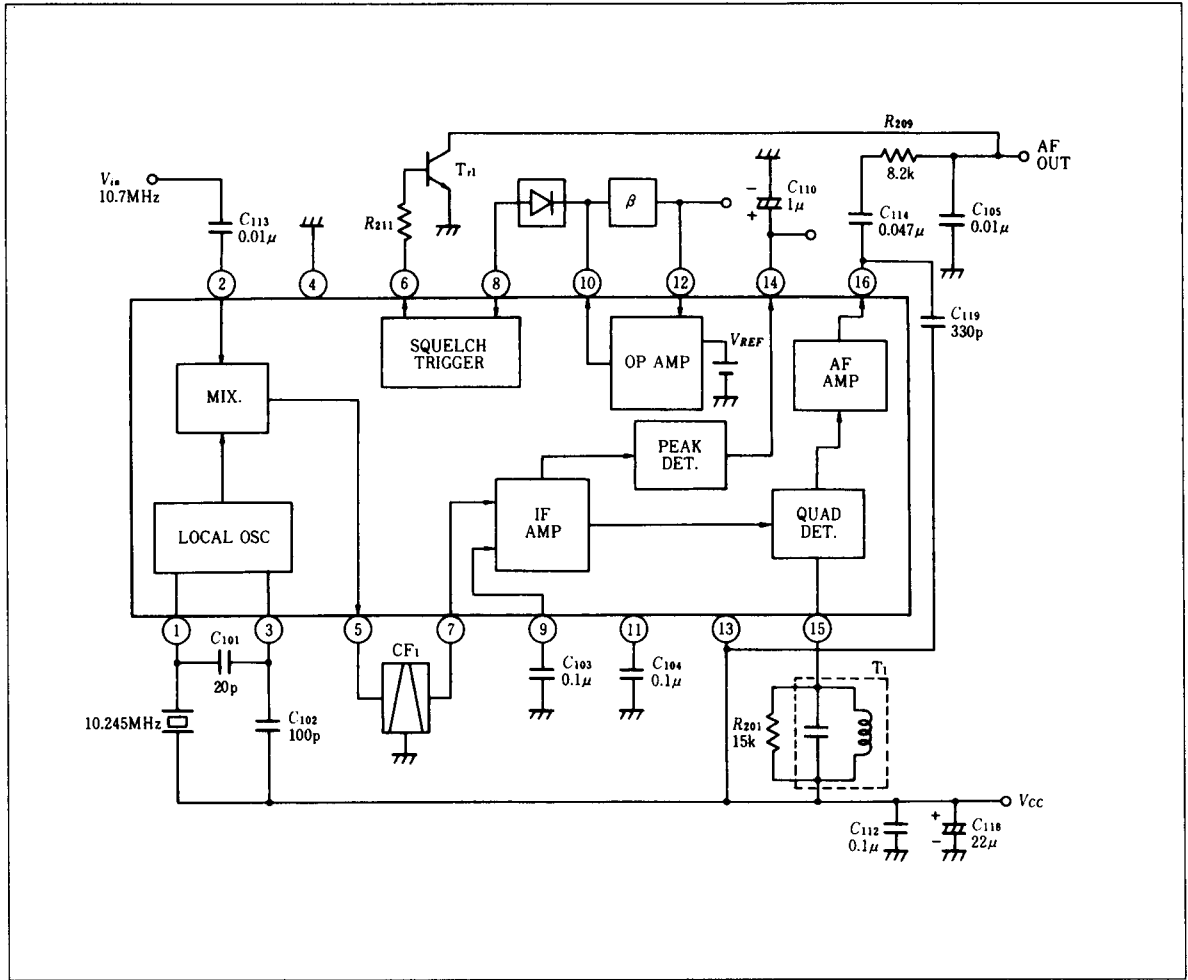

HA12441V

Absolute Maximum Ratings (Ta = 25°C, unless otherwise specified.)


| Item | Symbol | Rating | Unit | Note |
|-----------------------------|--------|-------------|------|-----------|
| Supply Voltage | Vcc | 8 | V | |
| Power Dissipation | Pr | 100 | mW | Ta = 75°C |
| Operating Temperature Range | Topt | -30 to +75 | °C | |
| Storage Temperature Range | Tstg | -55 to +125 | °C | |

Electrical Characteristics (Ta = 25°C, Vcc = 4 V, fc = 10.7 MHz, fm = 1 kHz, Δf = 3 KHz, and Vin = 100 dBμ unless otherwise specified.)

Adjust the core of T₁ to minimize distortion under the above conditions.

| Item | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------------|-------------|---|-----|-----|-----|------|
| Quiescent Current | Squelch OFF | Icc (1) no input | — | 4.2 | 5.4 | mA |
| | Squelch ON | Icc (2) no input | — | 4.6 | 6.3 | mA |
| Limiting Sensitivity | Vin (lim) | at the point of -3 dB Vo (AF) | — | 0 | 6 | dBu |
| Recovered AF Voltage | Vo (AF) | Vin = 100 dBμ | 110 | 160 | 210 | mV |
| Mixer Gain | Gv (Mix) | Vin = 60 dBμ | 22 | 26 | 29 | dB |
| Mixer Input Impedance | Zin (Mix) | DC Test | — | 3 | — | kΩ |
| Mixer Output Impedance | Zout (Mix) | DC Test | — | 2.2 | — | kΩ |
| IF Input Impedance | Zin (IF) | DC Test | — | 2.2 | — | kΩ |
| Squelch High Level Input Voltage | V6 (Hi) | | — | 3.9 | — | V |
| Squelch Low Level Output Voltage | V6 (Lo) | | — | 0 | 0.2 | V |
| Signal to Noise Ratio | S/N | Vin = 100 dBμ H.P.Filter (400 Hz at -3 dB) | 58 | 65 | — | dB |
| Squelch Hysteresis | HYST | | 50 | 90 | 130 | mV |
| Lower Limit Operating Voltage | Vcc (-3 dB) | Detector Output at Vcc = 4 V is the reference level. Vcc when detector output drops by -3dB at supply voltage down. | — | — | 2.7 | V |
| Filter Amp Gain | Gv (amp) | Vin = 0.15 mV, f = 10 kHz | 45 | 48 | — | dB |
| Signal Meter Voltage | VSM (100) | Vin = 100 dBμ | 1.8 | 2.2 | 2.7 | V |

Test Circuit

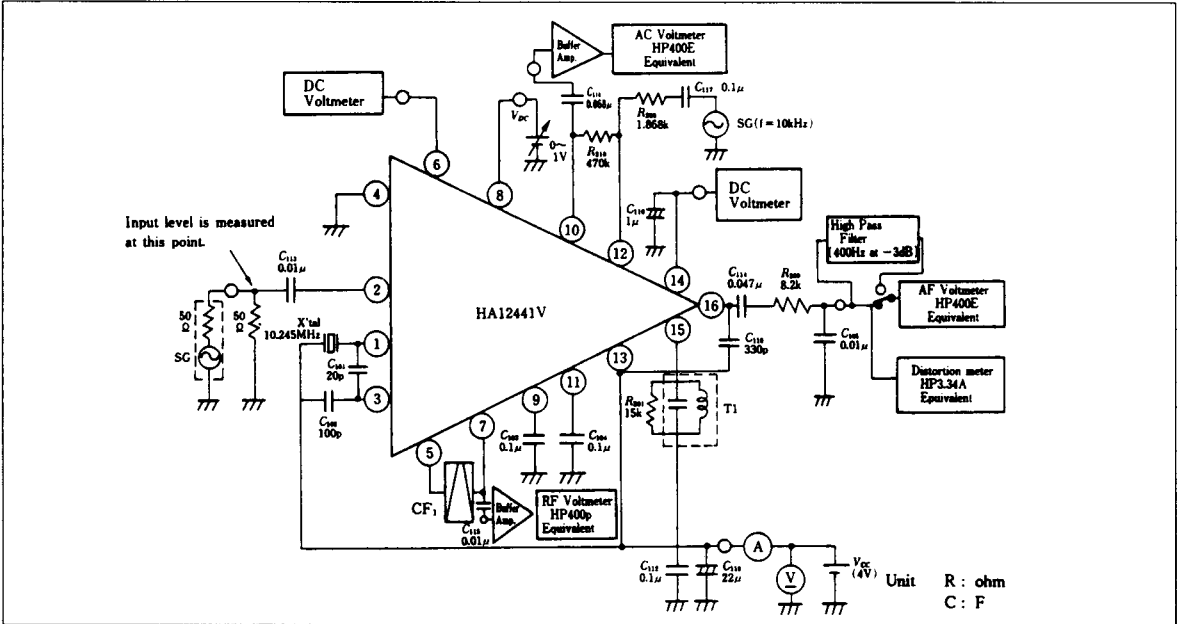


Squelch Application Circuit

The internal Op amp and squelch trigger circuit can be used to construct a noise squelch circuit. An example of the application circuit usage is shown in the following figure. The center frequency for the band


pass filter amp is chiefly determined by C106 and C107, while the gain for that amp by R208 and R210.

Noise Squelch Circuit (β Circuit for Op Amp and Noise Detector)

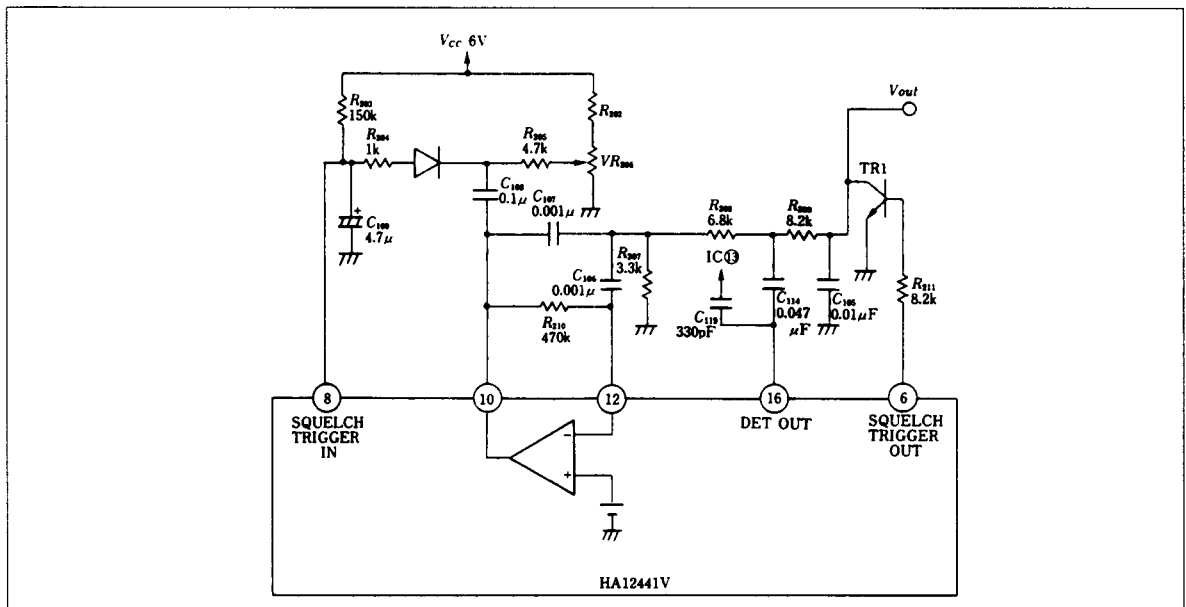


Notes: Connect C119 to Vcc line as near to Pin 13 as possible.

Filter Amplifier Frequency Characteristics

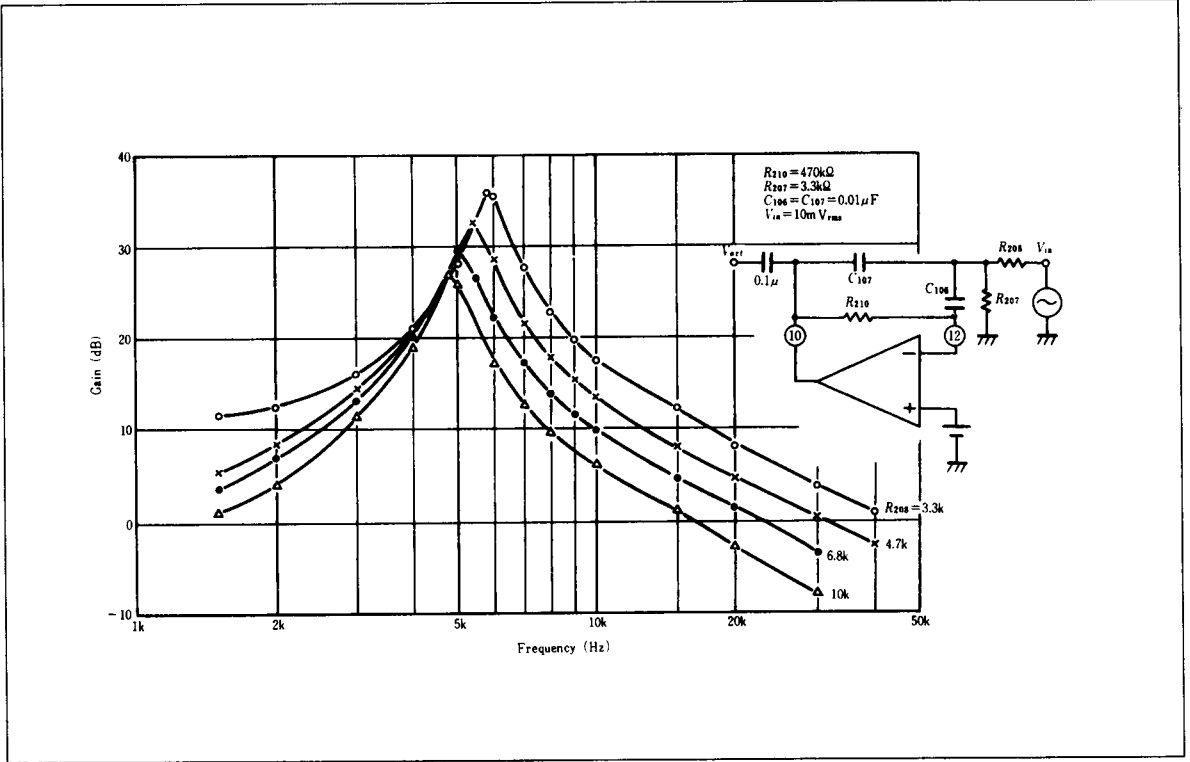


Filter Amplifier Frequency Characteristics

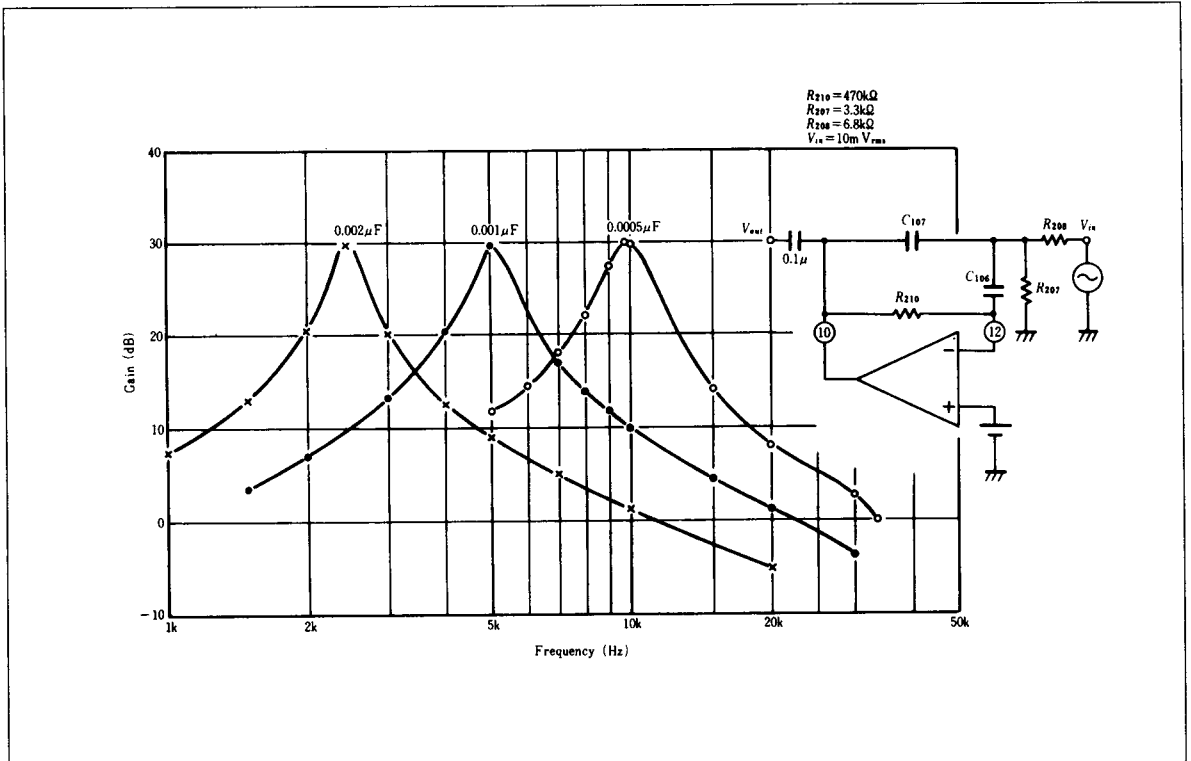

External Parts


X-tal Oscillator — NIHON DANPA TYPE NO. NC18C



Ceramic Filter — MURATA TYPE NO. CFW-455E



Detector Coil — TOKO (TRIAL PRODUCT) NO. 7MC-101000Z0

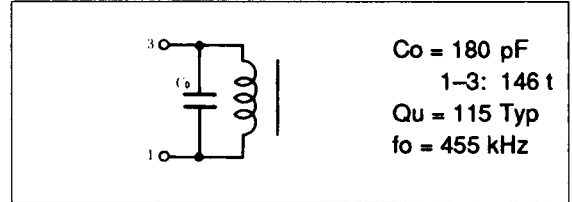

Parts for resistors and capacitors are as follows.

| Part No. | Recommended Value | Function | Influence | |
|----------|-------------------|--|---|---|
| | | | Greater than Recommended Value | Smaller than Recommended Value |
| C101 | 20 pF | Local Feedback Circuit | High Level Oscillation | Low Level Oscillation |
| C102 | 100 pF | | Low Level Oscillation | High Level Oscillation |
| C103 | 0.1 μF | IF Amp DC Feedback Decoupling | — | Decrease in IF Gain |
| C104 | 0.1 μF | | | |
| C105 | 0.01 μF | Recovered AF Carrier Attenuation | Load characteristics are influenced. | Load characteristics are influenced. |
| C106 | 0.001 μF | β Circuit for Op Amp | Decrease in Center Frequency for Band Pass Filter | Increase in Center Frequency for Band Pass Filter |
| C107 | 0.001 μF | | | |
| C108 | 0.1 μF | Detector for Noise Squelch Circuit | — | — |
| C109 | 4.7 μF | | Poor Squelch Response | — |
| C110 | 1 μF | Meter Output Decoupling | Poor Meter Response | — |
| C112 | 0.1 μF | Power Supply Bypass Capacitor | — | — |
| C113 | 0.01 μF | Input DC Cut | — | — |
| R201 | 15 k | Damping of Detector Coil | Increase in Detector Output | Decrease in Detector Output |
| R202 | 33 k | Detector for Noise Squelch Circuit | Decrease in Vth Setting | Increase in Vth Setting |
| R203 | 150 k | | | |
| R204 | 1 k | Setting of Squelch Vth | Poor Squelch Response | Poor Squelch Stability |
| R205 | 4.7 k | | — | — |
| VR206 | 22 k | | — | — |
| R207 | 3.3 k | β Circuit for Op Amp | — | — |
| R208 | 6.8 k | | Decrease in Amp Gain | Increase in Amp Gain |
| R209 | 8.2 k | Recovered AF Voltage Carrier Attenuation | Frequency response is influenced. | Frequency response is influenced. |
| R210 | 470 k | β Circuit for Op Amp | Increase in Amp Gain | Decrease in Amp Gain |
| R211 | 8.2 k | Current Limitation of Squelch Transistor | Saturation of TR1 is stopped. | Poor Circuit Limiter effect |
| C114 | 0.047 μF | Recovered AF Voltage DC Cut | — | Low level frequency response is influenced. |
| C119 | 330 p | High Frequency Rejection | Poor stability | Poor S/N |

TRS, DIODE

Tr1: 2SC 458

D1: 1S2076

Function Description

Comparator (Local Oscillator & Mixer)

The local oscillator and mixer are separated in this device. The former performs local oscillation by positively feeding the output on pin 3 back to pin 1 through C101. A double balance mixer is employed for the latter. The mixer yields a gain of 26 dB(typ.) (measured after the output on pin 5 passed the ceramic filter 1 (CF1)).

IF Amplifier

The IF amplifier is made up of five differential amplifiers.

The output on pin 5 from the mixer is applied to IF input pin (pin 7) through CF1. The input impedance on pin 7 is 2.2 k Ω (typ)

Detector

Quadrature detection method is employed for the detector. This detector performs FM detection by the multiplication of the signal amplified by the IF amplifier and the signal 90° phase shifted by the internal capacitor.


Signal Meter Driving Circuit

This device provides a method of detecting voltage peak of the signal from the IF amplifier for signal meter driving. C110 connected to pin 14 (output pin) is utilized for output voltage smoothing.



Squelch Circuit (Operational Amplifier & Squelch Trigger)



The noise squelch circuit is comprised of the internal operational amplifier and squelch trigger. The operational amplifier uses pins 12 and 10 for input and output, respectively. The filter amplifier has an input pin (pin 8) and output pin (pin 6) and causes a hysteresis of 90 mV (typ) at $V_{CC} = 4$ V.

Input/Output Characteristics

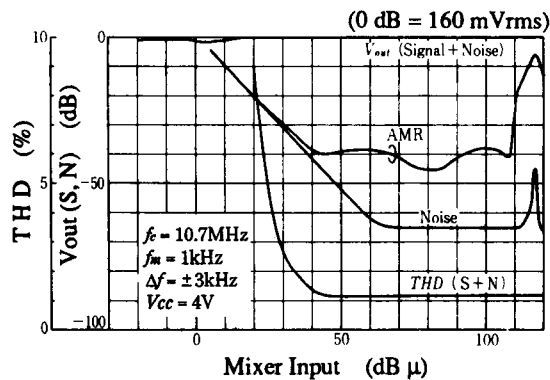


Input/Output Characteristics

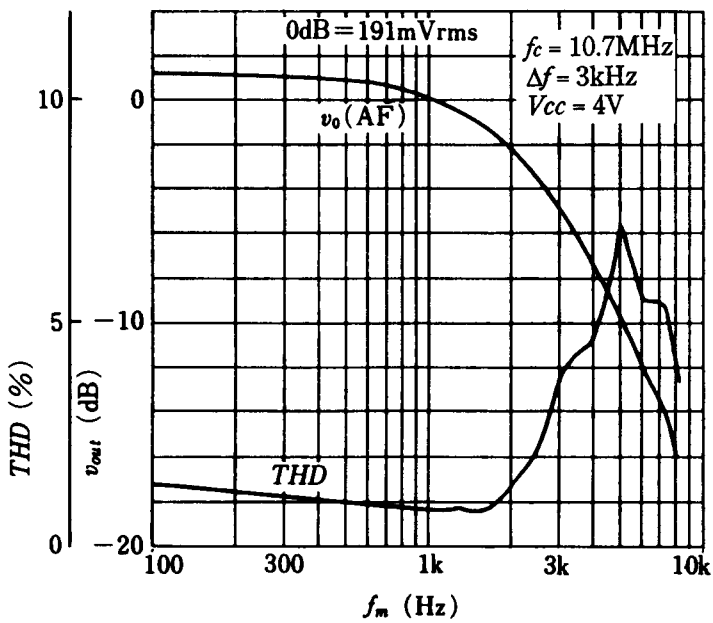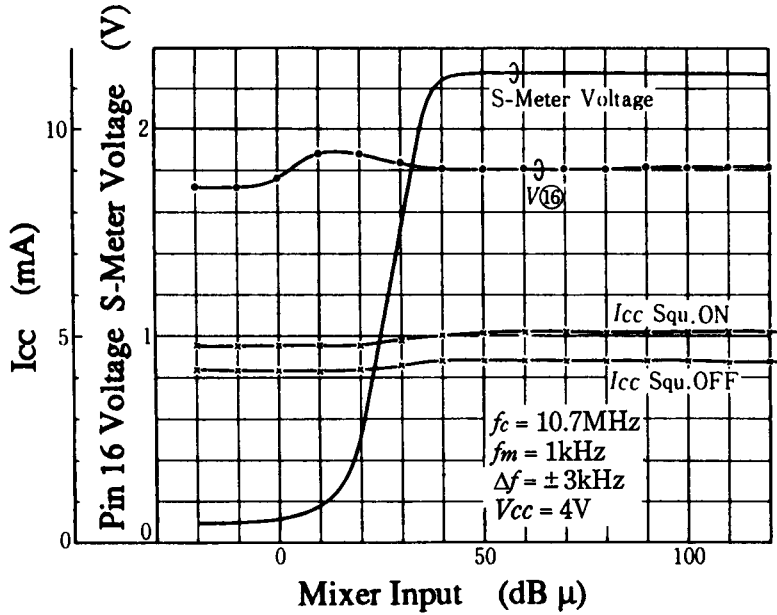


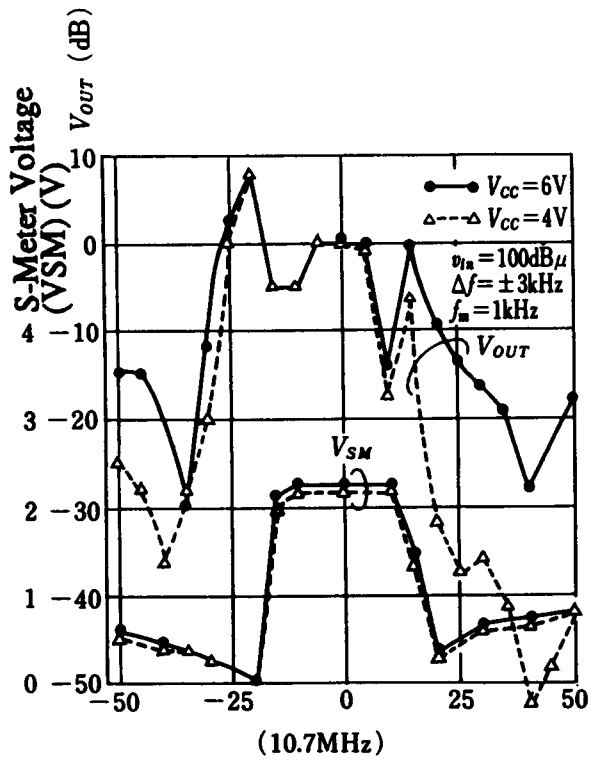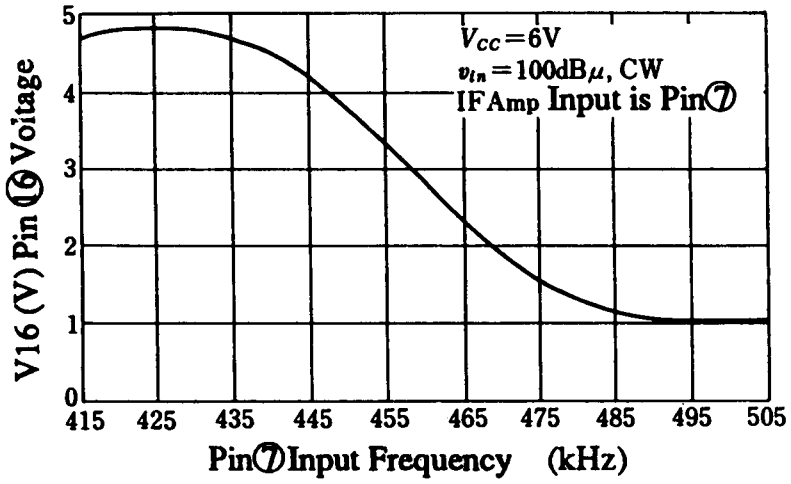


Supply Voltage Characteristics

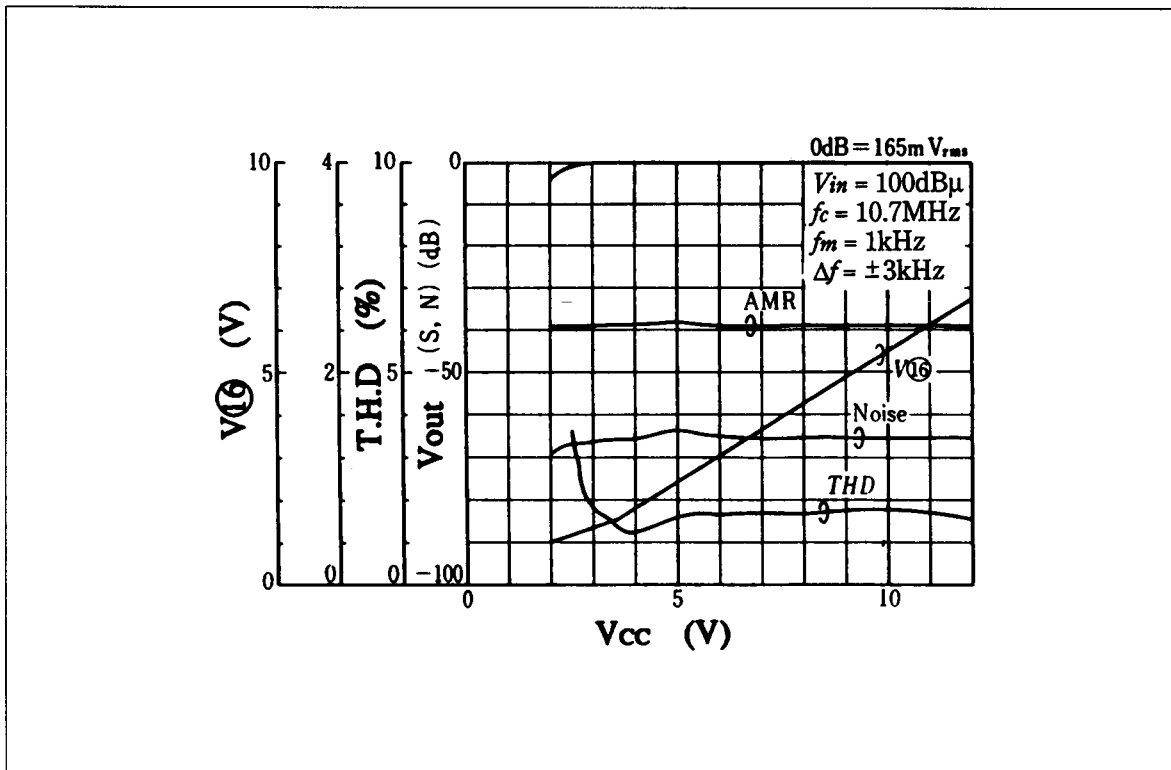


Input Sensitivity-Supply Voltage Characteristics

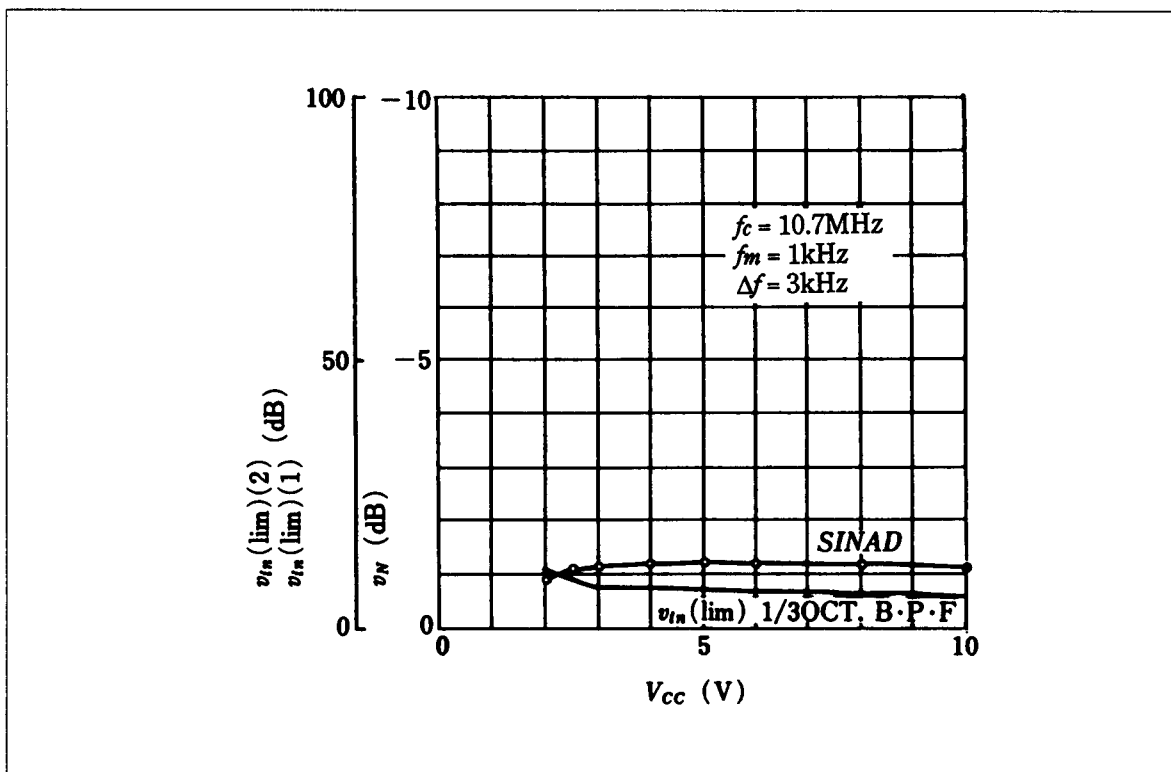


Signal Meter-Supply Voltage Characteristics

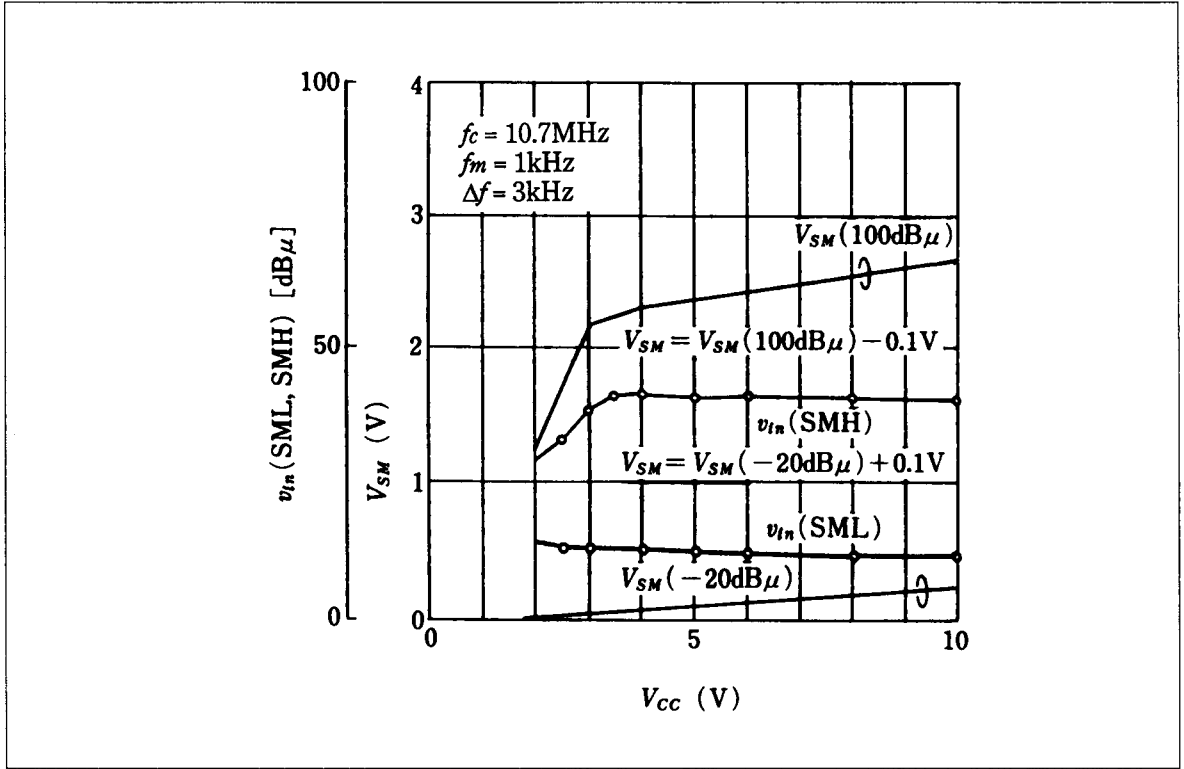


Supply Voltage Characteristics

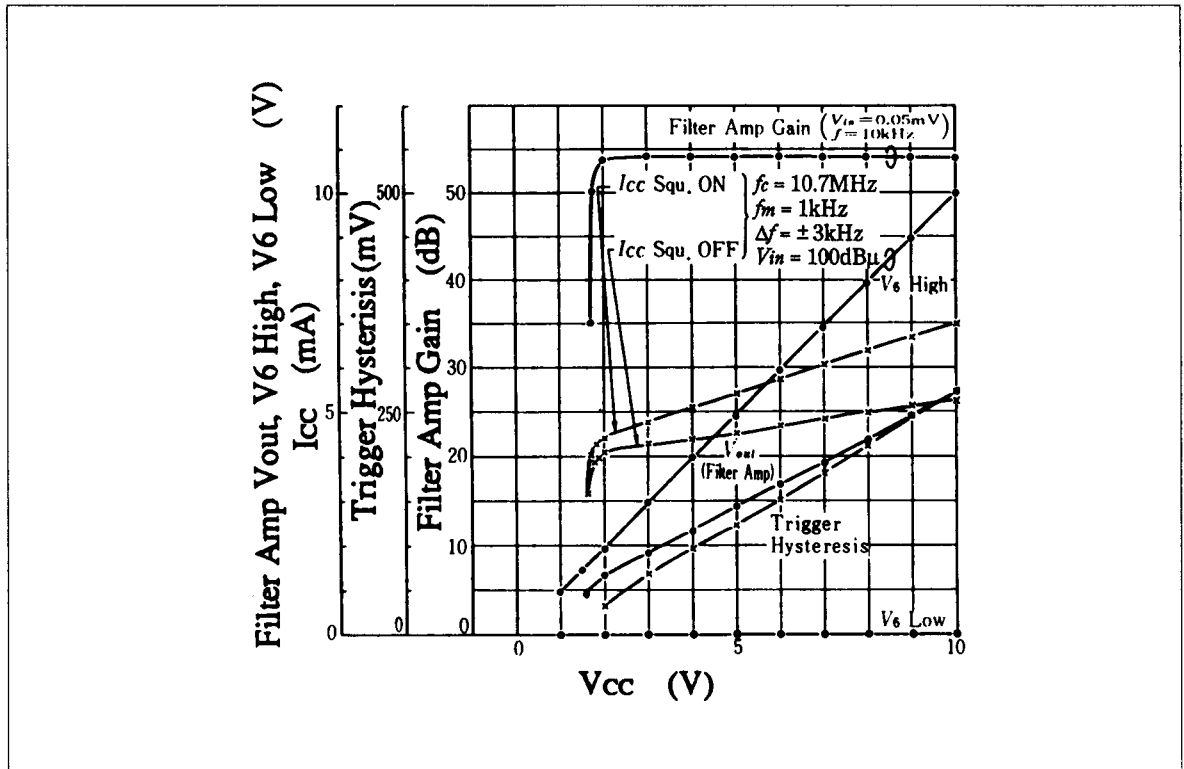


Icc-Supply Voltage Characteristics

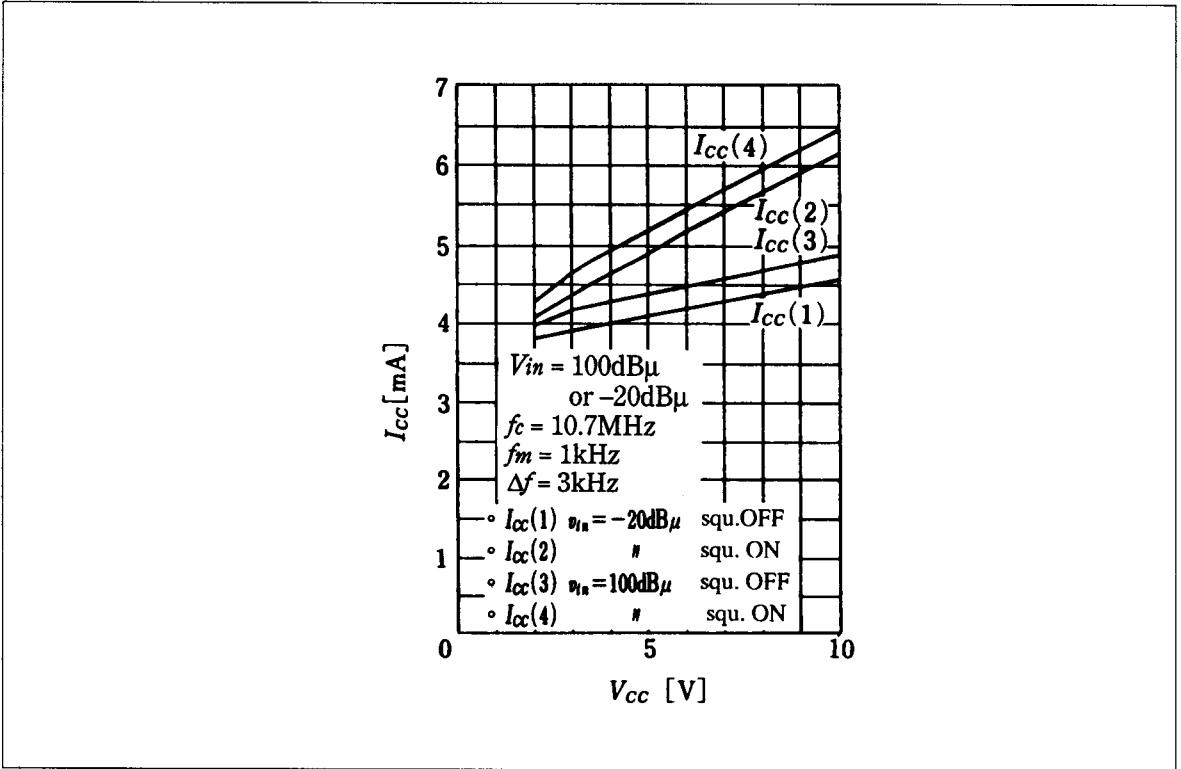


Converter Gain-Supply Voltage Characteristics

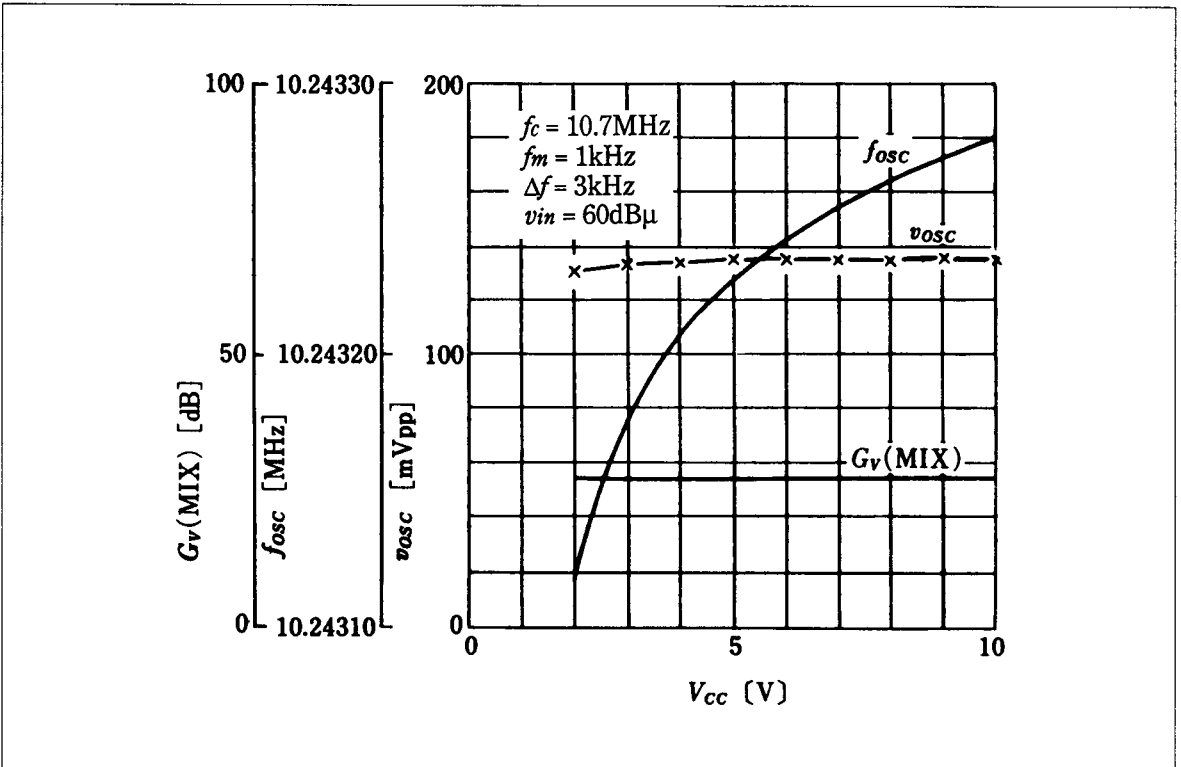

Output-Temperature Characteristics

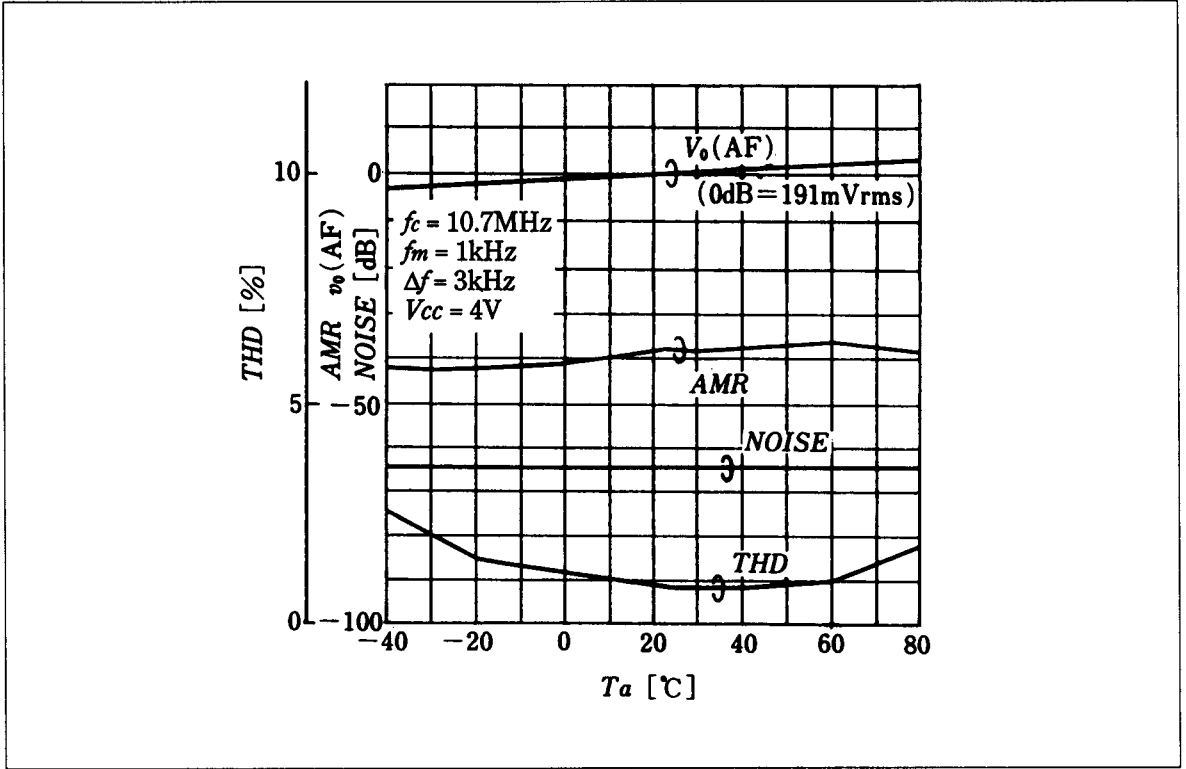

Converter Gain-Temperature Characteristics

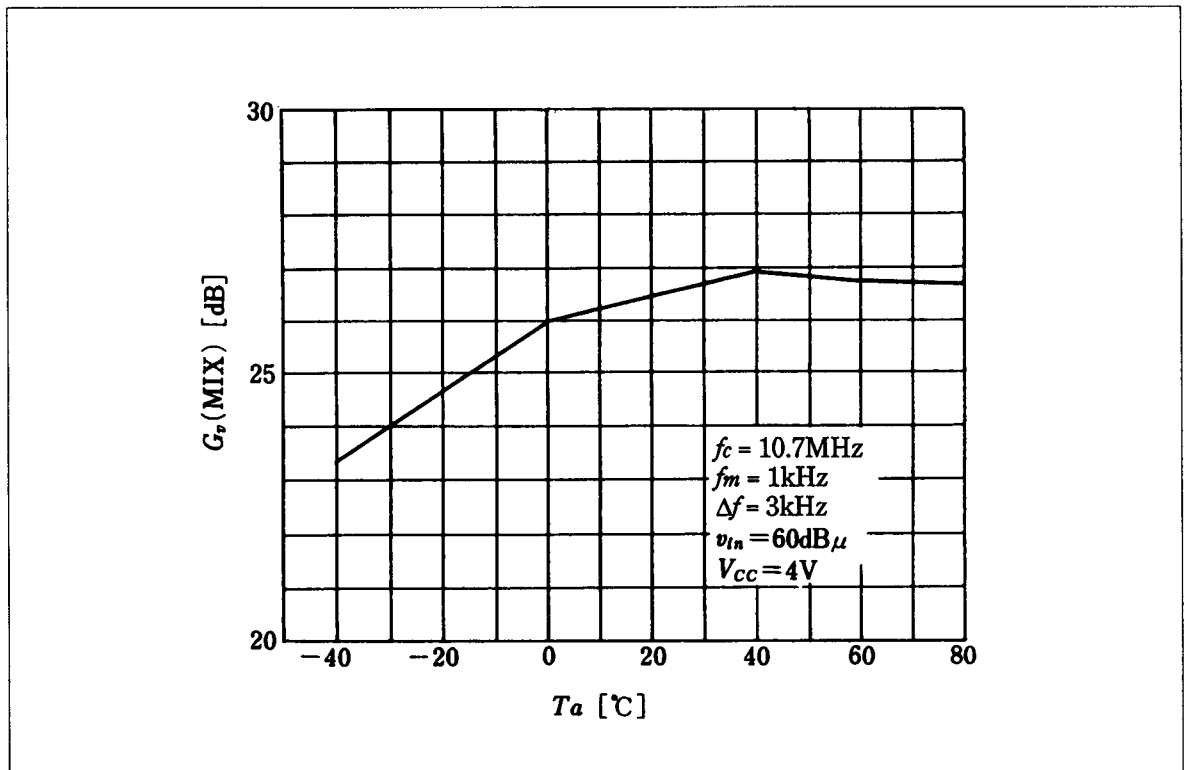

Input Sensitivity-Temperature Characteristics

