



## MILITARY HIGH SPEED 2K x 8 CMOS PROM/RPROM

### KEY FEATURES

- **Ultra-Fast Access Time**
  - $t_{ACC} = 35 \text{ ns}$
  - $t_{CS} = 20 \text{ ns}$
- **Low Power Consumption**
- **Fast Programming**
- **Available in 300 and 600 Mil DIP**
- **Pin Compatible with Am27S191/291 and N82S191 Bipolar PROMs**
- **Immune to Latch-UP**
  - Up to 200 mA
- **ESD Protection Exceeds 2000V**

### GENERAL DESCRIPTION


The WS57C191C/291C is an extremely High Performance 16K UV Erasable Electrically Re-Programmable Read Only Memory (RPROM). It is manufactured in an advanced CMOS technology which enables it to operate at Bipolar PROM speeds while consuming only 25% of the power required by its Bipolar counterparts. The WS57C191C/291C is also configured in the standard Bipolar PROM pinout which provides an easy upgrade path for systems which are currently using Bipolar PROMs.

The WS57C191C is packaged in a conventional 600 mil DIP package. The WS57C291C is packaged in a space saving 300 mil DIP package configuration.

### MODE SELECTION

MODE \ PINS					OUTPUTS
	$\overline{CS1}/V_{PP}$	CS2	CS3	$V_{CC}$	
Read	$V_{IL}$	$V_{IH}$	$V_{IH}$	$V_{CC}$	$D_{OUT}$
Output Disable	$V_{IH}$	X	X	$V_{CC}$	High Z
Output Disable	X	$V_{IL}$	X	$V_{CC}$	High Z
Program	$V_{PP}$	X	X	$V_{CC}$	$D_{IN}$
Program Verify	$V_{IL}$	$V_{IH}$	$V_{IH}$	$V_{CC}$	$D_{OUT}$
Output Disable	X	X	$V_{IL}$	$V_{CC}$	High Z

### PIN CONFIGURATION

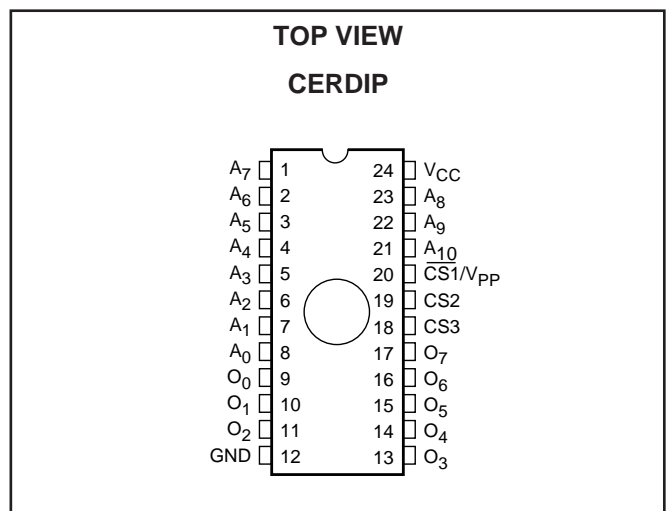

### PRODUCT SELECTION GUIDE

PARAMETER	WS57C191C/291C-35	WS57C191C/291C-45	WS57C191C/291C-55
Address Access Time (Max)	35 ns	45 ns	55 ns
CS to Output Valid Time (Max)	20 ns	20 ns	20 ns

**ORDERING INFORMATION**

PART NUMBER	SPEED (ns)	PACKAGE TYPE	PACKAGE DRAWING	OPERATING TEMPERATURE RANGE	WSI MANUFACTURING PROCEDURE
<b>WS57C191C</b>					
WS57C191C-35DMB	35	24 Pin CERDIP, 0.6"	D1	Military	MIL-STD-883C
WS57C191C-45DMB	45	24 Pin CERDIP, 0.6"	D1	Military	MIL-STD-883C
WS57C191C-55DMB	55	24 Pin CERDIP, 0.6"	D1	Military	MIL-STD-883C
<b>WS57C291C</b>					
WS57C291C-35TMB	35	24 Pin CERDIP, 0.3"	T1	Military	MIL-STD-883C
WS57C291C-45TMB	45	24 Pin CERDIP, 0.3"	T1	Military	MIL-STD-883C
WS57C291C-55TMB	55	24 Pin CERDIP, 0.3"	T1	Military	MIL-STD-883C

**NOTE:** 9. The actual part marking will not include the initials "WS."

**PROGRAMMING/ALGORITHMS/ERASURE/PROGRAMMERS**

**REFER TO  
PAGE 5-1**

The WS57C191C and WS57C291C are programmed using Algorithm D shown on page 5-9.

**For complete data sheet and electrical specifications see page 2-7.**

