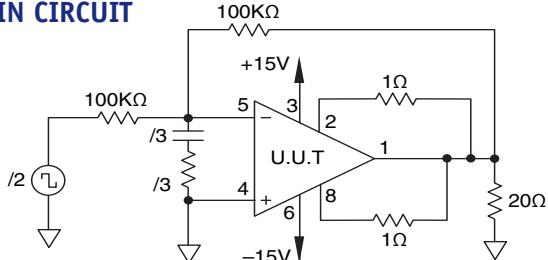


TABLE 4 GROUP A INSPECTION
PA12M/883

HTTP://WWW.APEXMICROTECH.COM (800) 546-APEX (800) 546-2739

SG	PARAMETER	SYMBOL	TEMP.	POWER	TEST CONDITIONS	MIN	MAX	UNITS
1	Quiescent current	I_o	25°C	$\pm 40V$	$V_{IN} = 0, A_V = 100, R_{CL} = .1\Omega$		50	mA
1	Input offset voltage	V_{os}	25°C	$\pm 40V$	$V_{IN} = 0, A_V = 100$		± 6	mV
1	Input offset voltage	V_{os}	25°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		± 12	mV
1	Input offset voltage	V_{os}	25°C	$\pm 45V$	$V_{IN} = 0, A_V = 100$		± 7	mV
1	Input bias current, +IN	$+I_B$	25°C	$\pm 40V$	$V_{IN} = 0$		± 30	nA
1	Inout bias current, -IN	$-I_B$	25°C	$\pm 40V$	$V_{IN} = 0$		± 30	nA
1	Input offset current	I_{os}	25°C	$\pm 40V$	$V_{IN} = 0$		± 30	nA
3	Quiescent current	I_o	-55°C	$\pm 40V$	$V_{IN} = 0, A_V = 100, R_{CL} = .1\Omega$	100	mA	
3	Input offset voltage	V_{os}	-55°C	$\pm 40V$	$V_{IN} = 0, A_V = 100$		± 11.2	mV
3	Input offset voltage	V_{os}	-55°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		± 17.2	mV
3	Input offset voltage	V_{os}	-55°C	$\pm 45V$	$V_{IN} = 0, A_V = 100$		± 12.2	mV
3	Input bias current, +IN	$+I_B$	-55°C	$\pm 40V$	$V_{IN} = 0$		± 115	nA
3	Input bias current, -IN	$-I_B$	-55°C	$\pm 40V$	$V_{IN} = 0$		± 115	nA
3	Input offset current	I_{os}	-55°C	$\pm 40V$	$V_{IN} = 0$		± 115	nA
2	Quiescent current	I_o	125°C	$\pm 40V$	$V_{IN} = 0, A_V = 100, R_{CL} = .1\Omega$	50	mA	
2	Input offset voltage	V_{os}	125°C	$\pm 40V$	$V_{IN} = 0, A_V = 100$		± 12.5	mV
2	Input offset voltage	V_{os}	125°C	$\pm 10V$	$V_{IN} = 0, A_V = 100$		± 18.5	mV
2	Input offset voltage	V_{os}	125°C	$\pm 45V$	$V_{IN} = 0, A_V = 100$		± 13.5	mV
2	Input bias current, +IN	$+I_B$	125°C	$\pm 40V$	$V_{IN} = 0$		± 70	nA
2	Input bias current, -IN	$-I_B$	125°C	$\pm 40V$	$V_{IN} = 0$		± 70	nA
2	Input offset current	I_{os}	125°C	$\pm 40V$	$V_{IN} = 0$		± 70	nA
4	Output voltage, $I_o = 10A$	V_o	25°C	$\pm 16V$	$R_L = 1\Omega$	10		V
4	Output voltage, $I_o = 80mA$	V_o	25°C	$\pm 45V$	$R_L = 500\Omega$	40		V
4	Output voltage, $I_o = 5A$	V_o	25°C	$\pm 35V$	$R_L = 6\Omega$	30		V
4	Current limits	I_{OL}	25°C	$\pm 14V$	$R_L = 6\Omega, R_{CL} = 1\Omega$.6	.89	A
4	Stability/noise	E_N	25°C	$\pm 40V$	$R_L = 500\Omega, C_L = 1.5nF, /1$		1	mV
4	Slew rate	SR	25°C	$\pm 40V$	$R_L = 500\Omega$	2.5	10	V/ μ s
4	Open loop gain	A_{OL}	25°C	$\pm 40V$	$R_L = 500\Omega, F = 10Hz$	96		dB
4	Common mode rejection	CMR	25°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	74		dB
6	Output voltage, $I_o = 8A$	V_o	-55°C	$\pm 14V$	$R_L = 1\Omega$	8		V
6	Output voltage, $I_o = 80mA$	V_o	-55°C	$\pm 45V$	$R_L = 500\Omega$	40		V
6	Stability/noise	E_N	-55°C	$\pm 40V$	$R_L = 500\Omega, C_L = 1.5nF, /1$		1	mV
6	Slew rate	SR	-55°C	$\pm 40V$	$R_L = 500\Omega$	2.5	10	V/ μ s
6	Open loop gain	A_{OL}	-55°C	$\pm 40V$	$R_L = 500\Omega, F = 10Hz$	96		dB
6	Common mode rejection	CMR	-55°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	74		dB
5	Output voltage, $I_o = 8A$	V_o	125°C	$\pm 14V$	$R_L = 1\Omega$	8		V
5	Output voltage, $I_o = 80mA$	V_o	125°C	$\pm 45V$	$R_L = 500\Omega$	40		V
5	Stability/noise	E_N	125°C	$\pm 40V$	$R_L = 500\Omega, C_L = 1.5nF, /1$		1	mV
5	Slew rate	SR	125°C	$\pm 40V$	$R_L = 500\Omega$	2.5	10	V/ μ s
5	Open loop gain	A_{OL}	125°C	$\pm 40V$	$R_L = 500\Omega, F = 10Hz$	96		dB
5	Common mode rejection	CMR	125°C	$\pm 15V$	$R_L = 500\Omega, F = DC, V_{CM} = \pm 9V$	74		dB

BURN IN CIRCUIT


- /1 Minimum gain recommendation is either $G = +4$ (non-inverting) or $G = -3$ (inverting).
- /2 Input signals are calculated to result in internal power dissipation of approximately 2.1W at case temperature = 125°C.
- /3 These components are used to stabilize device due to poor high frequency characteristics of burn in board.