



# SAW Components

Data Sheet B3829





SAW Components

B3829

Low-Loss Filter

87,0 MHz

Data Sheet


Ceramic package DCC18

Features

- Low-loss IF filter for GSM base stations
- Temperature stable
- Balanced or unbalanced operation
- Ceramic SMD package

Terminals


- Gold plated

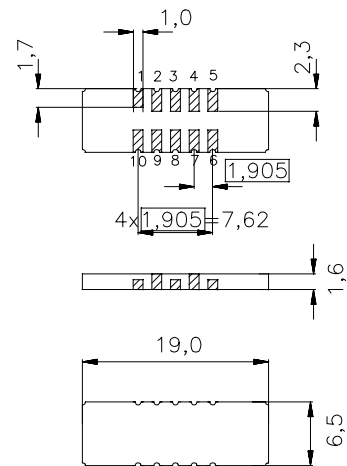

Dimensions in mm, approx. weight 0,8 g

Pin configuration

- |            |                                  |
|------------|----------------------------------|
| 10         | Input                            |
| 1          | Input ground or balanced input   |
| 5          | Output                           |
| 6          | Output ground or balanced output |
| 3, 8       | Ground                           |
| 2, 4, 7, 9 | Case ground                      |

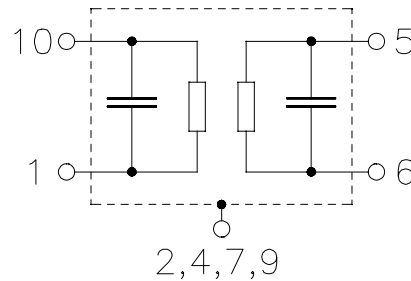

Type	Ordering code	Marking and Package according to	Packing according to
B3829	B39870-B3829-U210	C61157-A7-A54	F61074-V8069-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	$T$	-30/ +85	°C
Storage temperature range	$T_{stg}$	-40/ +85	°C
DC voltage	$V_{DC}$	0	V
Source power	$P_s$	10	dBm



**SAW Components**

**B3829**

**Low-Loss Filter**

**87,0 MHz**

**Data Sheet**

**Characteristics**

Operating temperature:  $T = -5 \dots +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S=50$  or  $200 \text{ } \Omega$  and matching network  
 Terminating load impedance:  $Z_S=50$  or  $200 \text{ } \Omega$  and matching network

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	87,0	—	MHz
<b>Minimum insertion attenuation</b> (including matching network)	$\alpha_{\min}$	—	4,7	7,0	dB
<b>Passband width</b>	$\alpha_{\text{rel}} \leq 3 \text{ dB}$ $B_{3\text{dB}}$	—	330	—	kHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 75 \text{ kHz}$ $\Delta\alpha$	—	0,3	1,0	dB
<b>Absolute group delay (at <math>f_N</math>)</b>	$\tau$	—	2,1	2,4	$\mu\text{s}$
<b>Group delay ripple (p-p)</b>	$f_N \pm 75 \text{ kHz}$ $\Delta\tau$	—	250	350	ns
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
$f_N \pm 200 \text{ kHz} \dots f_N \pm 400 \text{ kHz}$		3,5	5	—	dB
$f_N \pm 400 \text{ kHz} \dots f_N \pm 600 \text{ kHz}$		20	30	—	dB
$f_N \pm 600 \text{ kHz} \dots f_N \pm 800 \text{ kHz}$		25	30	—	dB
$f_N \pm 800 \text{ kHz} \dots f_N \pm 1600 \text{ kHz}$		28	35	—	dB
$30,00 \text{ MHz} \dots f_N - 1,60 \text{ MHz}$		34	45	—	dB
$f_N + 1,60 \text{ MHz} \dots 180,00 \text{ MHz}$		34	45	—	dB
$180 \text{ MHz} \dots 2000,00 \text{ MHz}$		50	60	—	dB
<b>Input and output return loss</b>		12	15	—	dB
<b>Temperature coefficient of frequency <sup>1)</sup></b>	$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	45	—	$^\circ\text{C}$


<sup>1)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



Data Sheet

Matching network to 50 Ω

(Element values depend upon PCB layout)

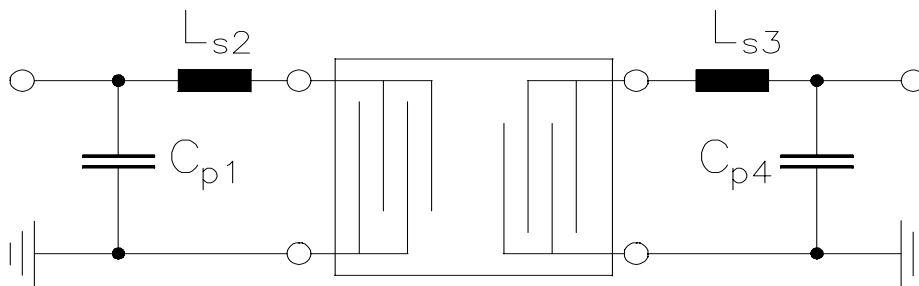


$C_{p1} = 56 \text{ pF}$   
 $L_{s2} = 150 \text{ nH}$

$L_{s3} = 150 \text{ nH}$   
 $C_{p4} = 56 \text{ pF}$




Data Sheet

Normalized frequency response

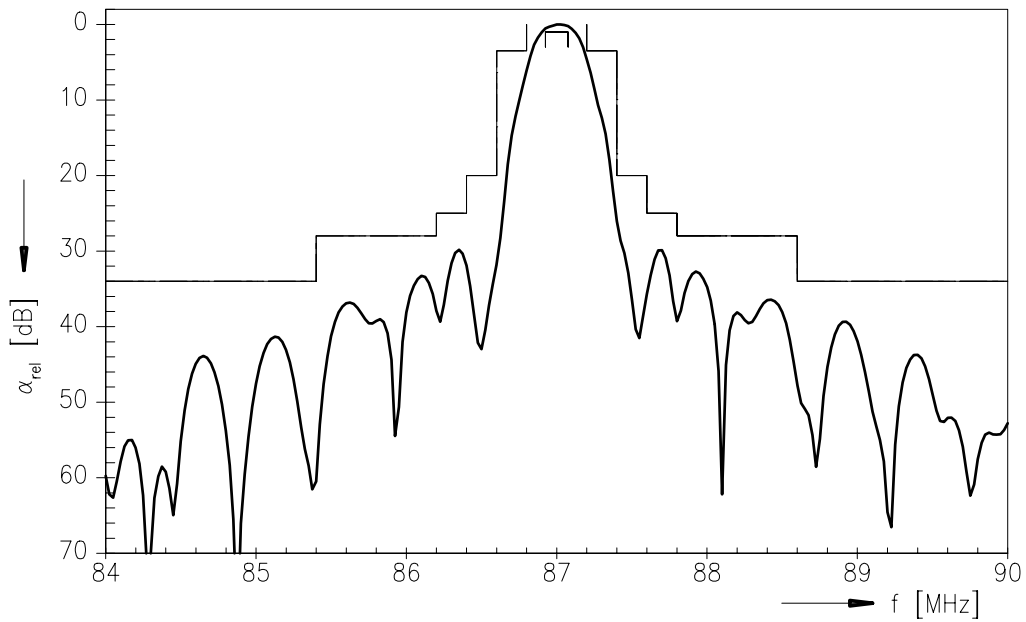

Normalized frequency response (pass band)

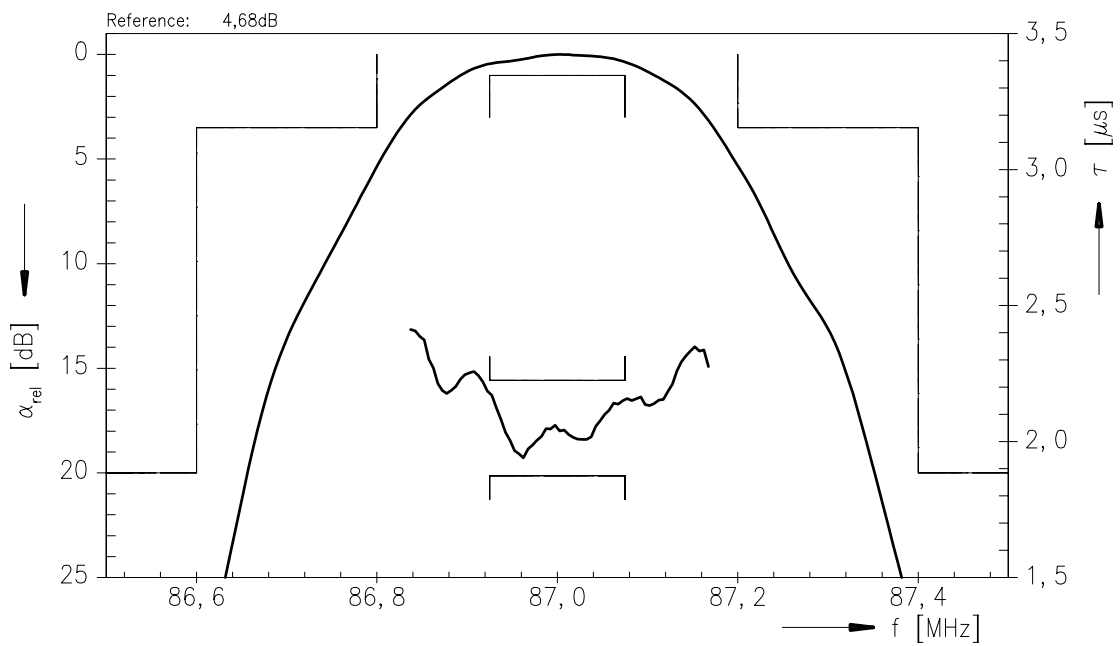



**SAW Components**

**B3829**

**Low-Loss Filter**

**87,0 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC IS**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.