


COMPLEMENTARY-OUTPUT HALL-EFFECT LATCH

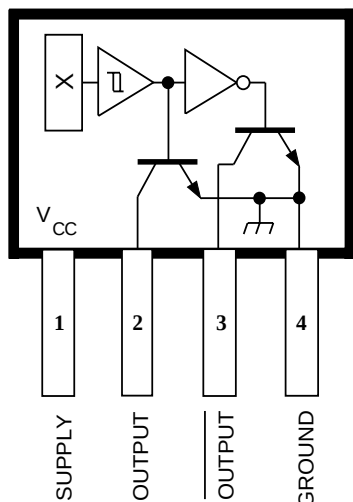

Dwg. PH-002

Pinning is shown viewed from branded side.

ABSOLUTE MAXIMUM RATINGS

Power Supply, V_{CC}	25 V
Magnetic Flux Density, B	Unlimited
Output OFF Voltage, V_{OUT}	25 V
Output ON Current, I_{OUT}	50 mA
Operating Temperature Range, T_A	-20°C to +85°C
Storage Temperature Range, T_S	-65°C to +150°C

Type UGN3275K latching Hall-effect sensors are bipolar integrated circuits designed for electronic commutation of brushless dc motors. They feature dual complementary outputs. The latches are typically used to sense matched magnetic flux densities of alternating polarity from multipole ring magnets.

Each sensor IC includes a Hall voltage generator, operational amplifier, Schmitt trigger, voltage regulator, and dual bipolar output transistors. The regulator allows use of the integrated circuit with supply voltages of 4.5 V to 24 V.

If the Hall cell is exposed to a magnetic flux density greater than the operate threshold (B_{OP}), OUTPUT goes low (turns on) and OUTPUT goes high (turns off). The outputs will hold (latch) this state until magnetic field reversal exposes the Hall cell to a magnetic flux density below the release threshold (B_{RP}) when OUTPUT will go high (off) and OUTPUT will go low (on). This state is also latched. Under any condition one output is on while the other is off. Because the operating state switches only with magnetic field reversal, and not merely with a change in the strength, these integrated circuits qualify as true Hall-effect latches.

These complementary-output Hall-effect latches are supplied in a four-pin plastic SIP, 0.200" (5.08 mm) wide, 0.130" (3.3 mm) high, and 0.060" (1.54 mm) thick.


FEATURES

- Operable with Multipole Ring Magnets
- High Reliability
- Small Size
- Output Compatible with All Digital Logic Families
- 4.5 V to 24 V Operation
- High Hysteresis Level Minimizes Stray-Field Problems
- Complementary Outputs


Always order by complete part number: **UGN3275K**.

3275
COMPLEMENTARY-OUTPUT
HALL-EFFECT LATCH

SENSOR LOCATION

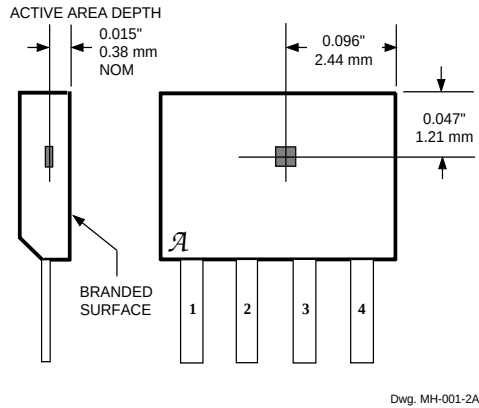

FUNCTIONAL BLOCK DIAGRAM

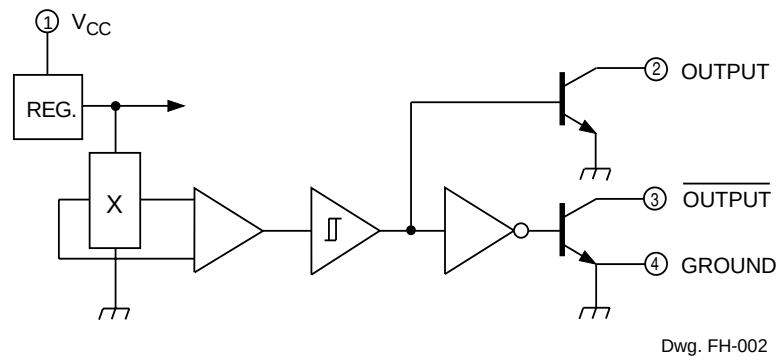

ELECTRICAL CHARACTERISTICS at T_A = +25°C, V_{CC} = 4.5 V to 24 V
(unless otherwise noted).

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage	V _{CC}	Operating	4.5	—	24	V
Output Saturation Voltage	V _{OUT(SAT)}	V _{CC} = 4.5 V, I _{OUT} = 20 mA, B > B _{OP}	—	—	400	mV
Output Leakage Current	I _{OFF}	V _{OUT} = 24 V, V _{CC} = 24 V, B < B _{RP}	—	—	10	μA
Supply Current	I _{CC}	V _{CC} = 24 V, B < B _{RP}	—	—	7.0	mA
Output Rise Time	t _r	V _{CC} = 12 V, R _L = 820 Ω, C _L = 20 pF	—	0.04	0.4	μs
Output Fall Time	t _f	V _{CC} = 12 V, R _L = 820 Ω, C _L = 20 pF	—	0.18	0.4	μs


MAGNETIC CHARACTERISTICS

Characteristic	Symbol	T _A = +25°C		T _A = -20°C to +85°C		Units
		Min.	Max.	Min.	Max.	
Operate Point	B _{OP}	25	250	15	250	G
Release Point	B _{RP}	-250	-25	-250	-15	G
Hysteresis	B _{hys}	100	—	100	—	G

NOTE: As used here, negative flux densities are defined as less than zero (algebraic convention).


3275 COMPLEMENTARY-OUTPUT HALL-EFFECT LATCH

Dimensions in Inches
(controlling dimensions)

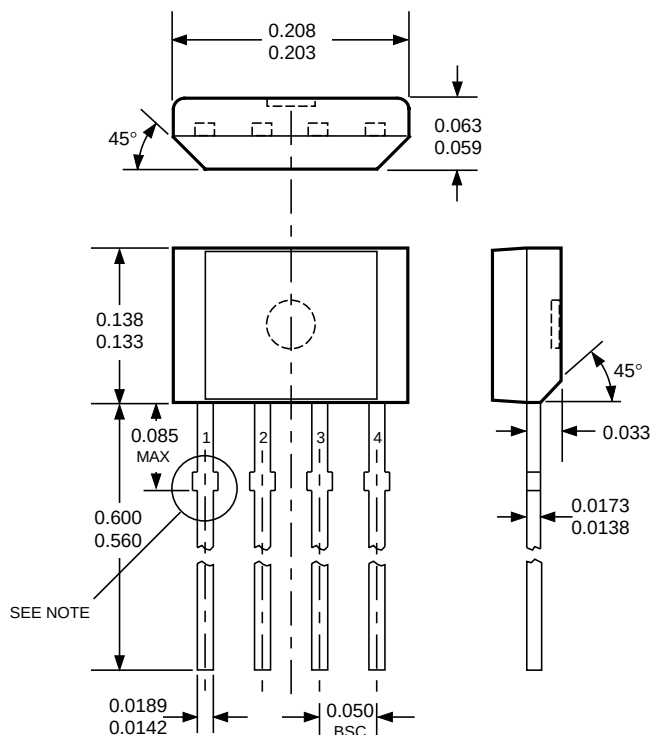

Dwg. MH-009D in

Dimensions in Millimeters
(for reference only)

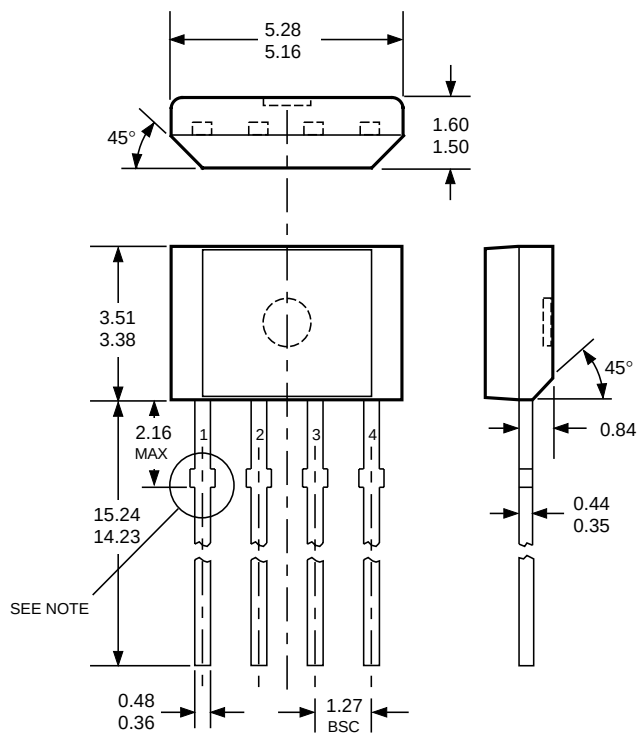

Dwg. MH-009D mm

- NOTES: 1. Tolerances on package height and width represent allowable mold offsets. Dimensions given are measured at the widest point (parting line).
2. Exact body and lead configuration at vendor's option within limits shown.
3. Height does not include mold gate flash.
4. Recommended minimum PWB hole diameter to clear transition area is 0.035" (0.89 mm).
5. Where no tolerance is specified, dimension is nominal.

The products described herein are manufactured under one or more of the following U.S. patents: 5,045,920; 5,264,783; 5,442,283; 5,389,889; 5,581,179; 5,517,112; 5,619,137; 5,621,319; 5,650,719; 5,686,894; 5,694,038; 5,729,130; 5,917,320; and other patents pending.

Allegro MicroSystems, Inc. reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro products are not authorized for use as critical components in life-support appliances, devices, or systems without express written approval.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems, Inc. assumes no responsibility for its use; nor for any infringements of patents or other rights of third parties that may result from its use.

3275 COMPLEMENTARY-OUTPUT HALL-EFFECT LATCH

HALL-EFFECT SENSORS

Partial Part Number	Avail. Oper. Temp.	Characteristics at T _A = +25°C			Features	Notes
		BOP(max)	BRP(min)	B _{hys} (typ)		
HALL-EFFECT UNIPOLAR SWITCHES in order of BOP and B _{hys}						
3240	E/L	+50	+5.0	10	chopper stabilized	1
3210	E	±60	±5.0	7.7	micropower, chopper stabilized	
3361	E	+55*	+110‡	5.0*	2-wire, chopper stabilized	
3362	E	+110	+55	5.0*	2-wire, chopper stabilized	
3161	E	+160	+30	20	2-wire	
3141	E/L	+160	+10	55		
3235	S	+175	+25	15*	output 1	2
		-25	-175	15*	output 2	2
5140	E	+200	+50	55	300 mA output	1, 3
3142	E/L	+230	+75	55		
3143	E/L	+340	+165	55		
3144	E/L	+350	+50	55		
3122	E/L	+400	+140	105		
3123	E/L	+440	+180	105		
3121	E/L	+450	+125	105		
3150	J	+40 to +850	—	20	programmable, chopper stabilized	1
HALL-EFFECT LATCHES & BIPOLAR SWITCHES [†] in order of BOP and B _{hys}						
3260	E/L	+30	-30	20	bipolar, chopper stabilized	
3280	E/L	+40	-40	45	chopper stabilized	
3134	E/L	+50	-50	27	bipolar switch	
3133	K/L/S	+75	-75	52	bipolar switch	
3281	E/L	+90	-90	100	chopper stabilized	
3132	K/L/S	+95	-95	52	bipolar switch	
3187	E/L	+150	-150	100*		
3177	S	+150	-150	200		
3625	S	+150	-150	200	900 mA outputs	1, 3, 5
3626	S	+150	-150	200	400 mA outputs	1, 3, 5
3195	E/L	+160	-160	220		1, 4
3197	L	+160	-160	230		1
3175	S	+170	-170	200		
3188	E/L	+180	-180	200*		
3283	E/L	+180	-180	300	chopper stabilized	
3189	E/L	+230	-230	100*		
3275	S	+250	-250	100*		5
3185	E/L	+270	-270	340*		

Operating Temperature Ranges:

S = -20°C to +85°C, E = -40°C to +85°C, J = -40°C to +115°C, K = -40°C to +125°C, L = -40°C to +150°C

Notes 1. Protected.

2. Output 1 switches on south pole, output 2 switches on north pole for 2-phase, bifilar-wound, unipolar-driven brushless dc motor control.

3. Power driver output.

4. Active pull down.

5. Complementary outputs for 2-phase bifilar-wound, unipolar-driven brushless dc motor control.

* Minimum. ‡ Maximum

† Latches will not switch on removal of magnetic field; bipolar switches may switch on removal of field but require field reversal for reliable operation over operating temperature range.



115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000