

Getting Started

The evaluation board comes with a battery pack attached. In this configuration, V_{IN} is supplied from three standard “AAA” alkaline batteries. Under new conditions for the batteries, the input voltage is generally 4.7V ~ 4.8V and falls off depending on the degree of discharge and load conditions. If desired, the batteries can be removed and an independent, DC supply can be used.

There are five buttons on the board. Their functions are as follows:

- SW1: Increments through the eight Output Setting states (Table 2 in the product datasheet).
- SW2: Increments B_LED duty cycle.
- SW3: Increments G_LED duty cycle.
- SW4: Increments R_LED duty cycle.
- SW5: Brings EN/SET low (shuts down the AAT4291 device).

Notes:

1. Buttons 1 through 4 will automatically increment if held down.
2. Buttons 2 through 4 are set up so that a user can independently control the corresponding R, G, or B LED brightness. This is done by incrementing the PWM duty cycle through the following states: 0%, 25%, 50%, 75%, 100%, 0%, ...

The PIC microcontroller toggles the EN/SET line high and low at 500kHz. The rise and fall times of the EN/SET signal are small relative to the period, so T_{HI} and T_{LO} are roughly $1\mu s$ (see Figure 1). T_{HI} and T_{LO} depend on the μC 's internal RC oscillator, so the $1\mu s$ reference is an approximate figure and subject to the precision of the RC oscillator.

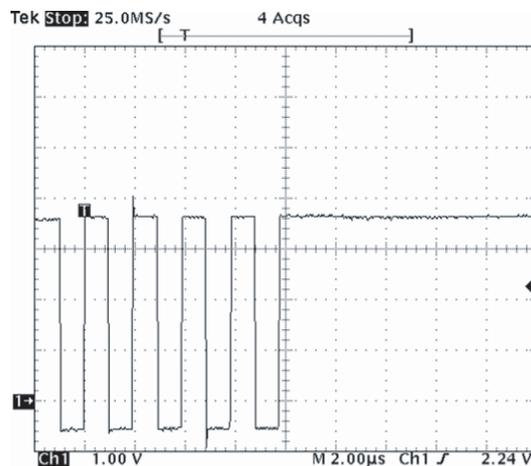


Figure 2: Typical EN/SET Signal.

Printed Circuit Board

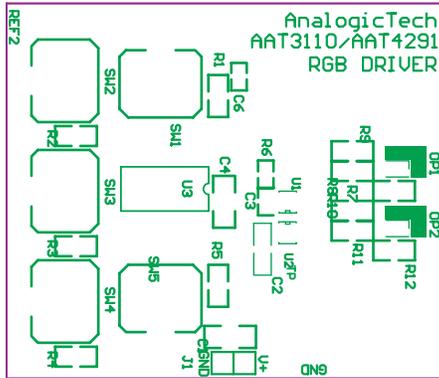


Figure 3: Top Layer Silkscreen (not to scale).

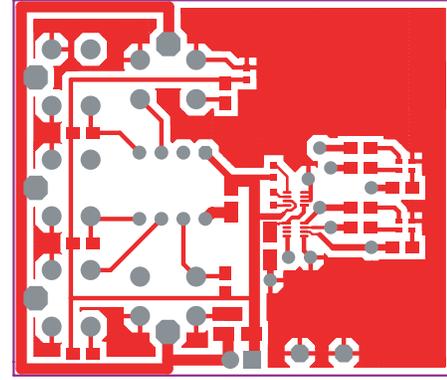


Figure 4: Top Layer (not to scale).

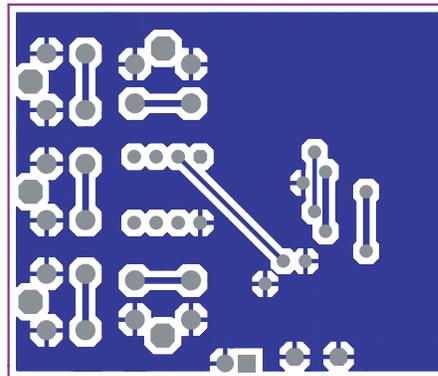


Figure 5: Bottom Layer (not to scale).

AAT4291 EVAL-RGB Component Listing

Component	Part#	Description	Manufacturer
U1	AAT3110	µPower Regulated 4.5V CP; SC70JW-8 Package	AnalogicTech
U2	AAT4291	I/O Expander Load Switches; SC70JW-8 Package	AnalogicTech
U3	PIC12C671	8-Bit CMOSµC; 8-Pin PDIP Package	Microchip
OP1, OP2	1615 SMD	RGB LED, Common-Cathode; 1615 SMD	Lasemtech
C1, C2, C4	GRM31CR70J106KA01L	10µF, 6.3V, X7R, 10%; 1206	Murata
C3	ECJ-1VB1A105K	1µF, 10V, X5R, 10%; 0603	Panasonic-ECG
C6	ECJ-1VB1C104K	0.1µF, 16V, X7R, 10%; 0603	Panasonic-ECG
R1 - R5	Chip Resistor	1K, 5%, 1/8W; 0805	Vishay
R6	Chip Resistor	100K, 5%, 1/10W; 0603	Vishay
R7, R12	Chip Resistor	249, 1%, 1/10W; 0805	Vishay
R8, R11	Chip Resistor	249, 1%, 1/10W; 0805	Vishay
R9, R10	Chip Resistor	60.4, 1%, 1/10W; 0805	Vishay
SW1 - SW5	PTS645TL50	Switch Tact, SPST, 5mm	ITT Industries

AnalogicTech cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AnalogicTech product. No circuit patent licenses, copyrights, mask work rights, or other intellectual property rights are implied.

AnalogicTech reserves the right to make changes to their products or specifications or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

AnalogicTech warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with AnalogicTech's standard warranty. Testing and other quality control techniques are utilized to the extent AnalogicTech deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed.

Advanced Analogic Technologies, Inc.
 830 E. Arques Avenue, Sunnyvale, CA 94085
 Phone (408) 737-4600
 Fax (408) 737-4611