


## Voltage Transducer LV 200-AW/2

For the electronic measurement of voltages : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high voltage) and the secondary circuit (electronic circuit).



$$I_{PN} = 20 \text{ mA}$$

$$V_{PN} = 100 \dots 2500 \text{ V}$$



### Electrical data

|          |  |                                 |                              |                         |                              |          |
|----------|--|---------------------------------|------------------------------|-------------------------|------------------------------|----------|
| $I_{PN}$ | Primary nominal r.m.s. current                           | 20                              | mA                           |                         |                              |          |
| $I_P$    | Primary current, measuring range                         | 0 .. $\pm 40$                   | mA                           |                         |                              |          |
| $R_M$    | Measuring resistance                                     | $R_{M \min}$                    | $R_{M \max}$                 |                         |                              |          |
|          |  |                                 |                              | with $\pm 15 \text{ V}$ | @ $\pm 20 \text{ mA}_{\max}$ | 0        |
|          |  |                                 | @ $\pm 40 \text{ mA}_{\max}$ | 0                       | 25                           | $\Omega$ |
|          |  | with $\pm 24 \text{ V}$         | @ $\pm 20 \text{ mA}_{\max}$ | 60                      | 170                          | $\Omega$ |
|          | @ $\pm 40 \text{ mA}_{\max}$                             | 60                              | 65                           | $\Omega$                |                              |          |
| $I_{SN}$ | Secondary nominal r.m.s. current                         | 100                             | mA                           |                         |                              |          |
| $I_S$    | Secondary current @ $I_{P \max}$                         | 200                             | mA                           |                         |                              |          |
| $K_N$    | Conversion ratio   | 10000 : 2000                    |                              |                         |                              |          |
| $V_C$    | Supply voltage ( $\pm 10 \%$ )                           | $\pm 15 \dots 24$               | V                            |                         |                              |          |
| $I_C$    | Current consumption                                      | $30 (@ \pm 24 \text{ V}) + I_S$ | mA                           |                         |                              |          |
| $V_d$    | R.m.s. voltage for AC isolation test, 50 Hz, 1 mn        | 6 <sup>1)</sup>                 | kV                           |                         |                              |          |
|          |  | 1 <sup>2)</sup>                 | kV                           |                         |                              |          |
| $V_e$    | R.m.s. voltage for partial discharges extinction @ 10 pC | 2.5                             | kV                           |                         |                              |          |

### Accuracy - Dynamic performance data

|          |   |           |               |    |
|----------|---|-----------|---------------|----|
| $X_G$    | Overall Accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$ | $\pm 0.5$ | %             |    |
| $e_L$    | Linearity error                                     | $< 0.1$   | %             |    |
| $I_O$    | Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$  | Typ       | Max           |    |
|          |   |           | $\pm 0.3$     | mA |
| $I_{OT}$ | Thermal drift of $I_O$                              | $\pm 0.4$ | $\pm 0.7$     | mA |
| $t_r$    | Response time <sup>3)</sup> @ 90 % of $V_{PN}$      | 20 .. 100 | $\mu\text{s}$ |    |

### General data

|       |  |                    |                  |
|-------|--|--------------------|------------------|
| $T_A$ | Ambient operating temperature                        | - 25 .. + 70       | $^\circ\text{C}$ |
| $T_S$ | Ambient storage temperature                          | - 40 .. + 85       | $^\circ\text{C}$ |
| $R_P$ | Primary coil resistance @ $T_A = 25^\circ\text{C}$   | 420                | $\Omega$         |
| $R_S$ | Secondary coil resistance @ $T_A = 70^\circ\text{C}$ | 40                 | $\Omega$         |
| $m$   | Mass   | 1.6                | kg               |
|       | Standards  | EN 50178(01.10.97) |                  |

Notes : <sup>1)</sup> Between primary and secondary + shield

<sup>2)</sup> Between secondary and shield

<sup>3)</sup>  $R_1 = 50 \text{ k}\Omega$  (L/R constant, produced by the resistance and inductance of the primary circuit)

### Features

- Closed loop (compensated) voltage transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0
- Accessible electronic circuit
- Shield between primary and secondary circuit.

### Principle of use

- For voltage measurements, a current proportional to the measured voltage must be passed through an external resistor  $R_1$  which is selected by the user and installed in series with the primary circuit of the transducer.


### Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- High immunity to external interference

### Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.

## Dimensions LV 200-AW/2 (in mm. 1 mm = 0.0394 inch)

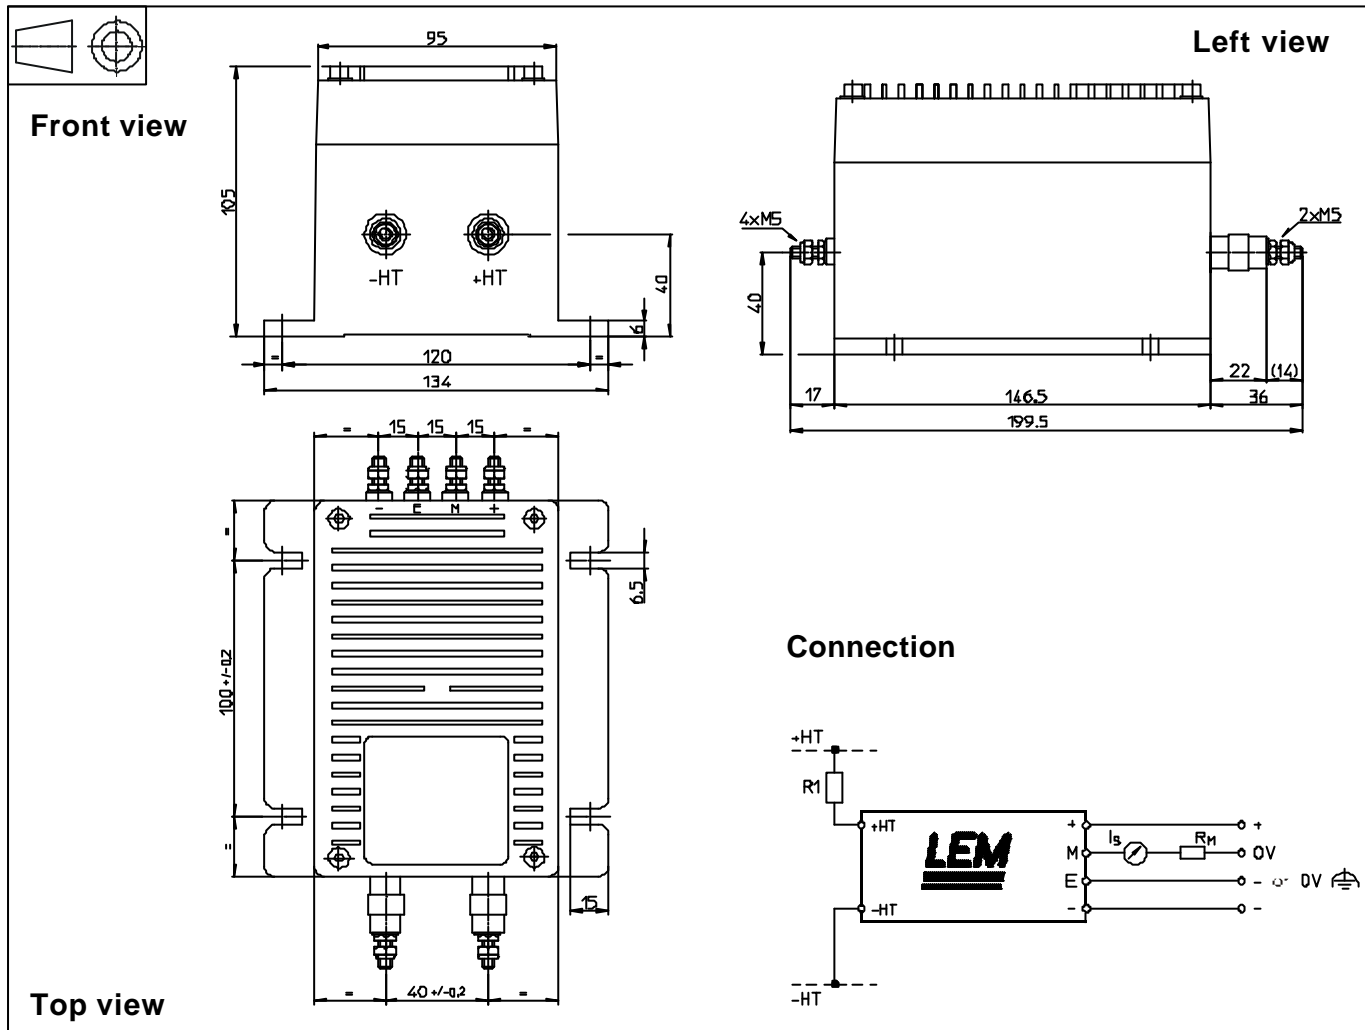

### Mechanical characteristics

- General tolerance ± 0.5 mm
- Fastening of the transducer
  - 4 slots Ø 6.5 mm
  - 4 steel screws M6
  - Recommended fastening torque 4.5 Nm or 3.32 Lb. - Ft.
- Connection of primary M5 threaded studs
- Connection of secondary M5 threaded studs
- Recommended fastening torque 2.2 Nm or 1.62 Lb - Ft.

### Remarks

- I<sub>S</sub> is positive when V<sub>p</sub> is applied on terminal +HT.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

### Instructions for use of the voltage transducer model LV 200-AW/2

Primary resistor R<sub>1</sub>: the transducer's optimum accuracy is obtained at the nominal primary current. As far as possible, R<sub>1</sub> should be calculated so that the nominal voltage to be measured corresponds to a primary current of 20 mA.

Example: Voltage to be measured V<sub>PN</sub> = 1000 V

- a) R<sub>1</sub> = 50 kΩ/40 W, I<sub>p</sub> = 20 mA Accuracy = ± 0.5 % of V<sub>PN</sub> (@ T<sub>A</sub> = +25°C)
- b) R<sub>1</sub> = 200 kΩ/10 W, I<sub>p</sub> = 5 mA Accuracy = ± 2.0 % of V<sub>PN</sub> (@ T<sub>A</sub> = +25°C)

Operating range (recommended): taking into account the resistance of the primary windings (which must remain low compared to R<sub>1</sub>, in order to keep thermal deviation as low as possible) and the isolation, this transducer is suitable for measuring nominal voltages from 100 to 2500 V.