



SANYO Semiconductors

## DATA SHEET

# LA7209V — Monolithic Linear IC

## ISO/IEC-14443 (proximity) RF amplifier for contact-less IC card and tag

### Overview

The LA7209V is a ISO/IEC-14443 (proximity) RF amplifier for contact-less IC card and tag.

### Features

- Driver amplifier for ASK modulation (under 500mW) :  
Modulation and output level be able to changing by out side constant.
- Diode detector (bridge connecting) : Abstract the data by envelope detector.
- Band pass filter (10kHz to 1MHz) : Data frequency bandwidth pass filter.
- Variable gain amplifier + fixed gain amplifier :  
Choosing the wide range output level by additional fixed gain amplifier.
- Comparator (10mVp-p to 2Vp-p) : Converting to the pulse signal of 0/5 volts from small signal.
- Regulator (2V) : Can be use the  $V_{CC} = 2.7V$  to 6.0V (recommend  $V_{CC} : 3V \pm 10\%$  or  $5V \pm 10\%$ )
- Type changeover switch (card type A/B, C) : All smart card and RF-tag can be read and write by TYPE\_CTL.
- Power save (mute) changeover switch : Power save (= 650 $\mu$ A) and output mute can be setting by PWR\_CTL.

### Specifications

Maximum Ratings at  $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\ max}$		9.0	V
Allowable power dissipation	$P_d\ max$	$T_a \leq 75^\circ C$ *	600	mW
Operating temperature	$T_{opr}$		-20 to +75	$^\circ C$
Storage temperature	$T_{stg}$		-40 to +125	$^\circ C$

\* When mounted on a 114.3mm $\times$ 76.1mm $\times$ 1.6mm, glass epoxy board.

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# LA7209V

## Recommended Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended operating voltage	V <sub>CC</sub>		5.0	V
Allowable operating voltage range	V <sub>CC op</sub>		2.7 to 6.0	V

## Electrical Characteristics at Ta = 25°C, V<sub>CC</sub> = 5V

Parameter	Symbol	IN	OUT	Conditions	Ratings			Unit
					min	typ	max	
Consumption current 1	I <sub>CC1</sub>	T2A T3A		V <sub>IN</sub> = 3.0Vp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the flowing current at pin 20. T7 : 3.0V, SW1 : 2, SW2 : Open, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	15	20	25	mA
Consumption current 2	I <sub>CC2</sub>	T2A T3A		V <sub>IN</sub> = 3.0Vp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the flowing current at pin 22 & 23. T7 : 3.0V, SW1 : 2, SW2 : Open, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	7	9.5	12	mA
Consumption current 1 in power save	I <sub>CC1S</sub>	T2A T3A		V <sub>IN</sub> = 3.0Vp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the flowing current at pin 20 in P.S. T7 : 3.0V, SW1 : 2, SW2 : Open, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	0.5	0.65	0.8	mA
Consumption current 2 in power save	I <sub>CC2S</sub>	T2A T3A		V <sub>IN</sub> = 3.0Vp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the flowing current at pin 22 & 23 in P.S. T7 : 3.0V, SW1 : 2, SW2 : Open, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	0	0.1	0.2	mA
MOD output level 1	V <sub>MOD1</sub>	T2A T3A	T22 T23	V <sub>IN</sub> = 3.0Vp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the amplitude of output waveform. T7 : 3.0V, SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	9	12	15	Vp-p
MOD output level 2	V <sub>MOD2</sub>	T2A T3A	T22 T23	V <sub>IN</sub> = 750mVp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the amplitude of output waveform. T7 : 3.0V, SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	1.2	2.5	3.8	Vp-p
MOD output level 3	V <sub>MOD3</sub>	T2A T3A	T22 T23	V <sub>IN</sub> = 750mVp-p, 13.2MHz, Square wave (T2A/T3A : Opposite) The ratio of V <sub>MOD2</sub> . T7 : 3.0V, SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	70	85	100	%
MOD output level 4	V <sub>MOD4</sub>	T2A T3A	T22 T23	V <sub>IN</sub> = 750mVp-p, 13.8MHz, Square wave (T2A/T3A : Opposite) The ratio of V <sub>MOD2</sub> . T7 : 3.0V, SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	70	85	100	%
MOD 2nd harmonic distortion	THD2	T2A T3A	T22 T23	V <sub>IN</sub> = 750mVp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure 2nd harmonic distortion of output waveform. T7 : 3.0V, SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	-60	-40	-34	dB
Modulation type A	MODA	T2A T3A T7	T22 T23	V <sub>IN</sub> = 3.0Vp-p, 106kHz, Square wave (T7) V <sub>IN</sub> = 750mVp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure modulation of output waveform. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	90	100	110	%
Modulation type B	MODB	T2A T3A T7	T22 T23	V <sub>IN</sub> = 3.0Vp-p, 106kHz, Square wave (T7) V <sub>IN</sub> = 750mVp-p, 13.5MHz, Square wave (T2A/T3A : Opposite) Measure modulation of output waveform. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2	25	30	35	%
Modulator output noise level	N <sub>MOD</sub>	T7	T22 T23	DC_3V are impressed to T7 and an output noise is measured. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 2, SW5 : 2, SW6 : 2		-43	-39	dBV
MOD DATA input voltage "High"	V <sub>DATH</sub>	T7	T6	DC voltage that T6 sinks. SW1 : 2, SW2 : 2, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	1.7		5.0	V
MOD DATA input voltage "Low"	V <sub>DATL</sub>	T7	T6	DC voltage that T6 opens. SW1 : 2, SW2 : 2, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	0.0		1.3	V

Continued on next page.

# LA7209V

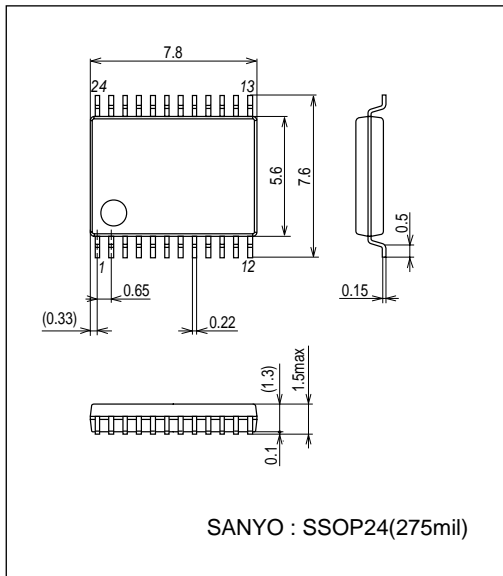
Continued from preceding page.

Parameter	Symbol	IN	OUT	Conditions	Ratings			Unit
					min	typ	max	
DET demodulation sensitivity type A	DETA	T22 T23	T18	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (847kHz) Measure the C/N ratio of the 847kHz component. SW1 : 1, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	42	45	48	dB
DET demodulation sensitivity type C	DETC	T22 T23	T18	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (106kHz) Measure the C/N ratio of the 106kHz component. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	47	50	53	dB
DET demodulation sensitivity 423k	DT423	T22 T23	T18	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (423kHz) Measure the C/N ratio of the 423kHz component. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	45	48	51	dB
Comparator sensitivity	SCMP	T16A	T15	$V_{IN} = 10mV_{p-p}$ , 106kHz, Square wave Measure the amplitude of output waveform. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 2, SW6 : 2	2.5	3.0	3.1	Vp-p
Comparator output "Low"	VC MPL	T2A T3A T7	T15	$V_{IN} = 3.0V_{p-p}$ , 106kHz, Square wave (T7) $V_{IN} = 3.0V_{p-p}$ , 13.5MHz, Square wave (T2A/T3A : Opposite) Measure the bottom of DC of output waveform. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 2, SW6 : 2	0	0.2	0.4	V
EVR characteristics 1	GEVR1	T22 T23	T18	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (847kHz) Measure the output level at Pin 18, Calculate output/input ratio. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	24	30		dB
EVR characteristics 2	GEVR2	T22 T23	T18	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (847kHz) Measure the output level at Pin 18, Calculate GEVR1 minus output level. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 2, SW6 : 2	14	16	18	dB
TAG DET output	VTAG	T22 T23	T10	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (847kHz) Measure the output level at Pin 18. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	2.5	3.0	3.1	Vp-p
TAG DET output "Low"	VTAGL	T22 T23	T10	$V_{IN} = 5.0V_{p-p}$ (13.5MHz)+28mVp-p (847kHz) Measure the DC bottom level of output wave at Pin 18. SW1 : 2, SW2 : 2, SW3 : 2, SW4 : 1, SW5 : 1, SW6 : 2	0	0.2	0.4	V
Type Switch ON voltage	TYPON	T11	T4	DC voltage that T4 sinks. SW1 : Open, SW2 : 2, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	0.0		1.3	V
Type Switch OFF voltage	TYPOF	T11	T4	DC voltage that T4 opens. SW1 : Open, SW2 : 2, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	1.7		5.0	V
Power save ON voltage	PSON	T12	T20	DC voltage that DC current 1mA or less flows into T20. SW1 : 2, SW2 : Open, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	1.7		5.0	V
Power save OFF voltage	PSOFF	T12	T20	DC voltage that DC current 10mA or more flows into T20. SW1 : 2, SW2 : Open, SW3 : 3, SW4 : 2, SW5 : 2, SW6 : 2	0.0		1.3	V


# LA7209V

## Package Dimensions

unit : mm (typ)  
3175C










## Block Diagram

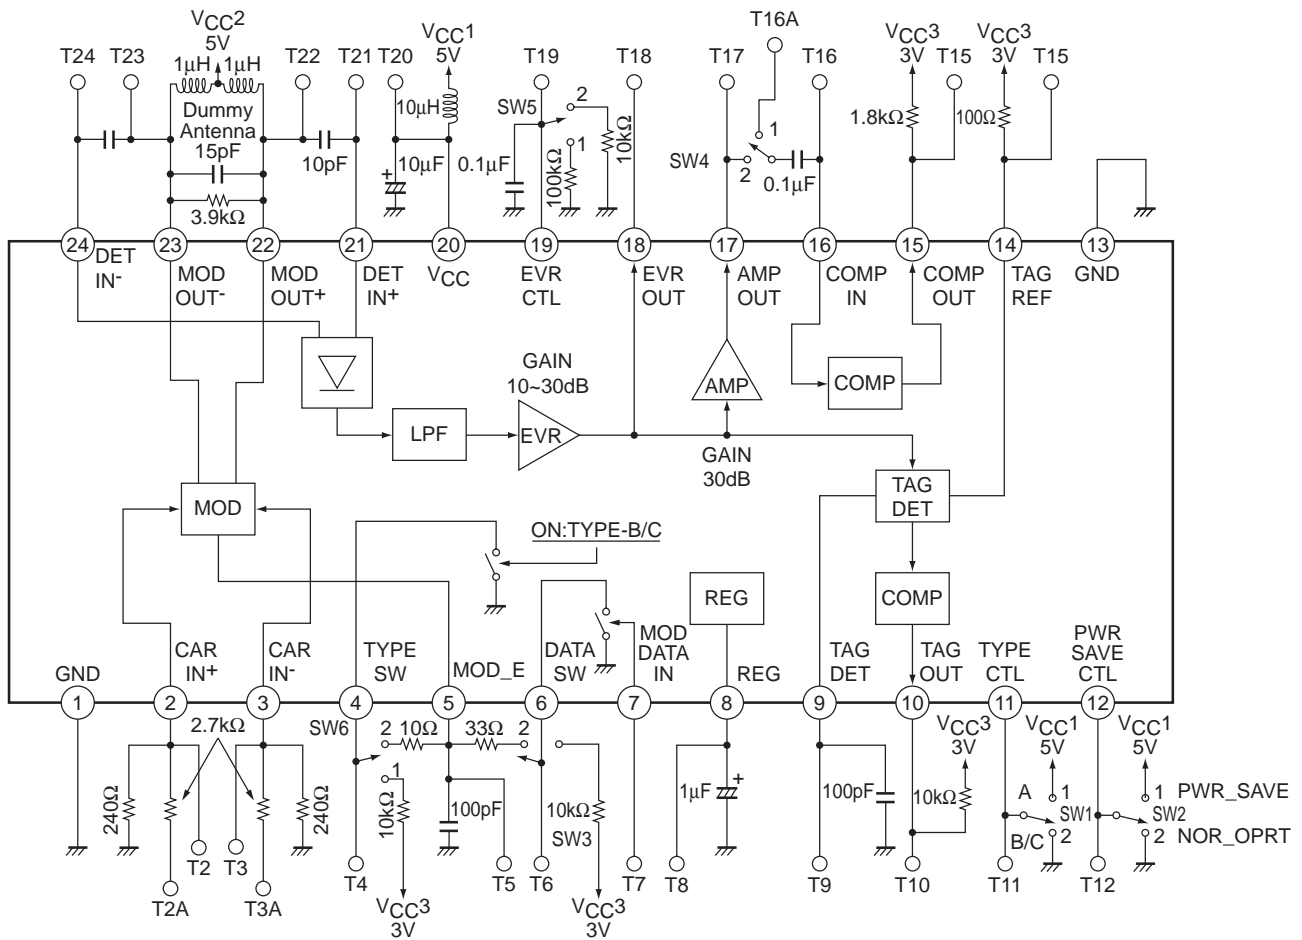

\* Dummy antenna : TDK inductor EL0405  
Specifications : L = 1µH ±1%, Q = 50 (at f = 7.96MHz), DC resistance = 0.22Ω (maximum)

# LA7209V

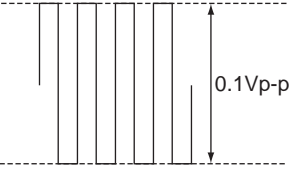
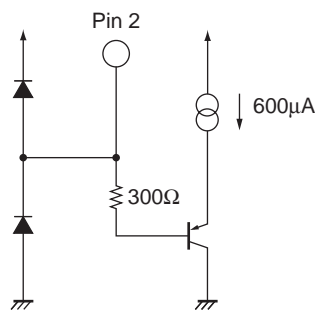
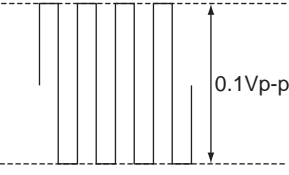
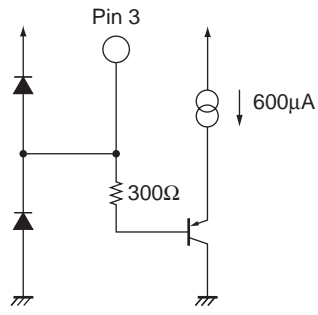
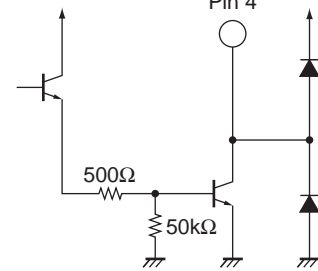
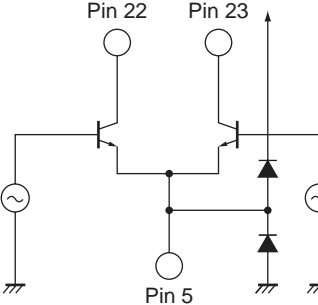
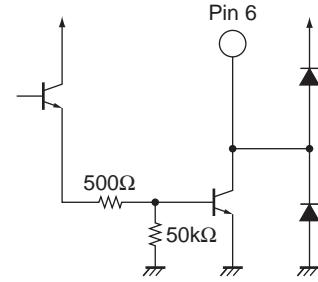
## Pin Functions

Pin No.	Pin Name	DC voltage	Signal wave form	Equivalent Circuit
1	GND			
2	CAR_IN <sup>+</sup>	0V	SQUARE-WAVE : 13.5MHz 	
3	CAR_IN <sup>-</sup>	0V	SQUARE-WAVE : 13.5MHz 	
4	TYPE_SW	0V	DC	
5	MOD_E	1V	DC	
6	DATA_SW	0V	DC	

Continued on next page.

# LA7209V

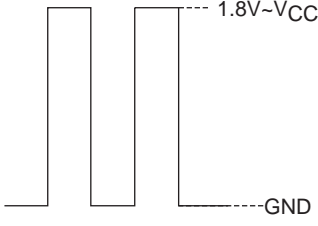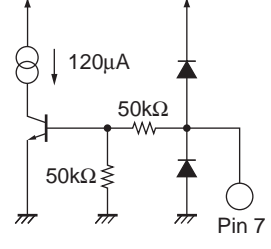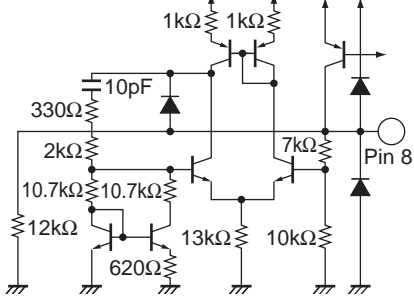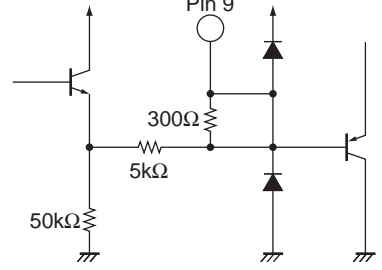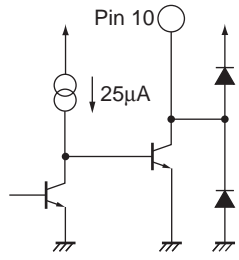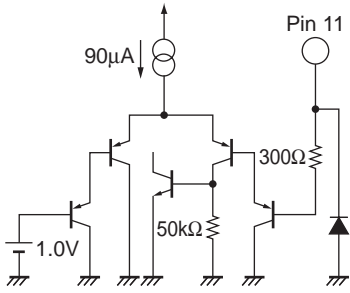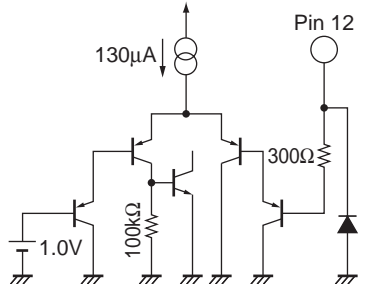Continued from preceding page.

Pin No.	Pin Name	DC voltage	Signal wave form	Equivalent Circuit
7	MOD_DATA_IN	0V	SQUARE-WAVE 	
8	REG	2V	DC	
9	TAG_DET			
10	TAG_OUT	5V	DC	
11	TYPE_CTL	0V to 1.2V : TYPE_B/C 1.8V to V <sub>CC</sub> : TYPE_A		
12	PWR_SAVE_CTL	0V to 1.2V : Normal 1.8V to V <sub>CC</sub> : Power_Save		
13	GND			

Continued on next page.

# LA7209V

Continued from preceding page.

Pin No.	Pin Name	DC voltage	Signal wave form	Equivalent Circuit
14	TAG_REF	0.5V	DC	
15	COMP_OUT	1.6V	SQUARE-WAVE	
16	COMP_IN	1.2V	SQUARE-WAVE	
17	AMP_OUT	4V	SQUARE-WAVE	
18	EVR_OUT	4V	SQUARE-WAVE	

Continued on next page.

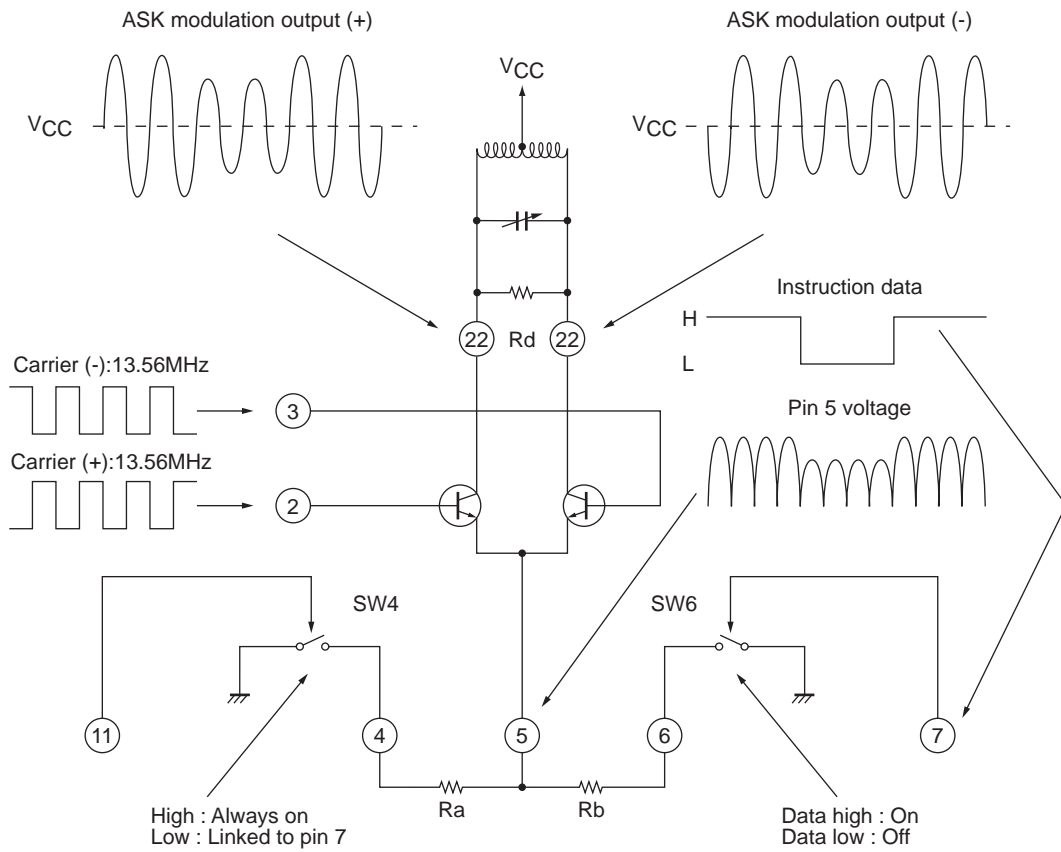
# LA7209V

Continued from preceding page.


Pin No.	Pin Name	DC voltage	Signal wave form	Equivalent Circuit
19	EVR_CTL	1.4V	DC	
20	V <sub>CC</sub>	5V	DC	
21 24	DET_IN <sup>+</sup> DET_IN <sup>-</sup>	2V	ASK-WAVE : 13.5MHz 	
22 23	MOD_OUT <sup>+</sup> MOD_OUT <sup>-</sup>	5V	ASK-WAVE : 13.5MHz 	



## ASK Modulation Driver Amplifier Signal Flow



## Read Amplifier Signal Flow

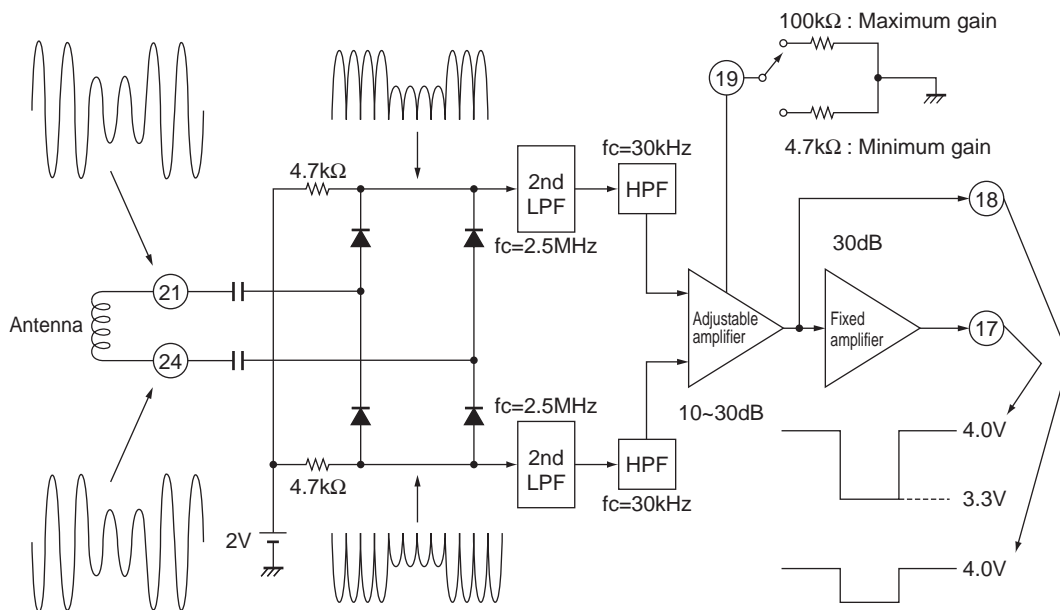

# LA7209V

## Description of Functional Settings

1. ASK modulation driver amplifier: ASK modulates the data and outputs it as an RD signal.

(1) Input settings

Pins 2 and 3 input a 13.56MHz carrier signal (pulse/sine wave) as an inverting/noninverting input pair.

The input dynamic range is 500mVp-p.

### I/O Characteristics Sample Data

Input level [mVp-p]	Output level [Vp-p] Data : high/low	Ra [Ω]	Rb [Ω]	Rd [kΩ]	Antenna current [mA] Data : high/low	IC current [mA] Data : high/low
280	7.9/3.9	15	4.7	1	13.5/6.0	20.9/19.4
220	6.3/3.3	15	4.7	1	10.5/4.8	20.7/19.2
180	4.6/2.5	15	4.7	1	7.8/3.7	20.5/19.0
280	7.1/3.3	22	6.8	1	11.9/4.9	20.9/19.4
220	5.6/2.9	22	6.8	1	9.3/4.0	20.7/19.2
180	4.1/2.3	22	6.8	1	7.0/3.1	20.5/19.0
280	6.2/2.9	33	10	1	10.0/3.9	20.9/19.4
220	4.8/2.5	33	10	1	8.0/3.2	20.7/19.2
180	3.5/1.5	33	10	1	6.0/2.5	20.5/19.0

(2) Setting the degree of modulation

The degree of modulating is set by the ratio of the resistors connected between pins 4 and 5 (Ra) and pins 5 and 6 (Rb). For types B and C, this is determined by the idling current (Ia) determined by Ra and parallel resistance of Ra + Rb.

The degree of modulation is determined by the idling current (Iab).

(Modulation is performed by switching pin 6 (DATA\_SW) on and off.)

For type A, the 100% modulation point is determined by the idling current (Iab) determined by the parallel resistance of Ra + Rb.

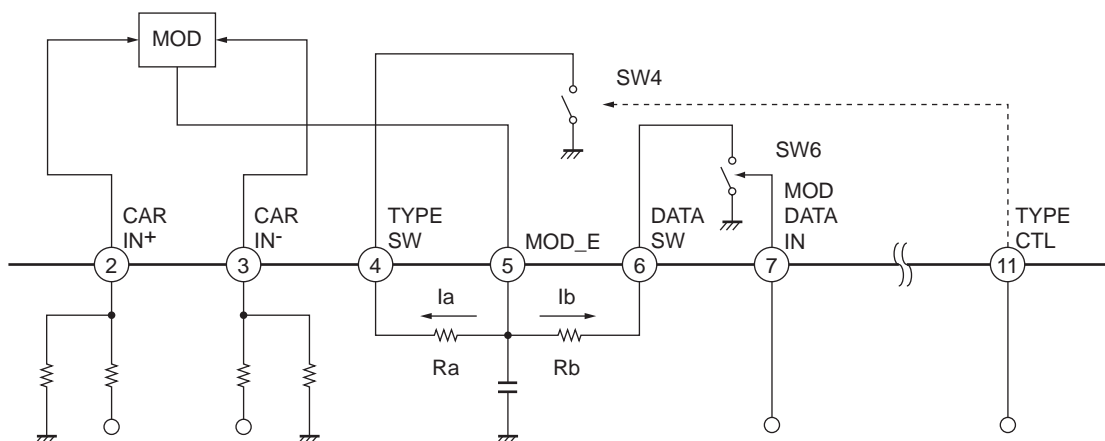
(Modulation is performed by switching pin 4 (TYPE\_SW) and pin 6 on and off at the same time.)

### Setting the Degree of Modulation

	Pin 11	
	High (Type A)	Low (type B and C)
Pin 4	*1	On

	Pin 7	
	Data high	Data low
Pin 6	On	Off

\*1 : When type A is selected by setting pin 11 high, SW4 and SW6 operate in a linked manner.



# LA7209V

## Degree of Modulation Sample Data

Input level [mVp-p]	Output level [Vp-p] Data : high/low	Ra [Ω]	Rb [Ω]	Rd [kΩ]	Antenna current [mA] Data : high/low	IC current [mA] Data : high/low	Degree of modulatio [%]
220	4.8/3.9	10	33	1	8.0/6.0	20.7/19.2	10
220	4.8/0.0	10	33	1	8.0/0.1	20.7/19.2	100

\* : This IC can support out-of-standard modulation levels by settings using the resistors Ra and Rb described above.

### (3) Output level setting

The output level is set by setting the two items (the input level and the idling current) described above and the damping resistor (Rd) between pins 22 and 23. Note that although an output amplitude (at pins 22 and 23) of about two times the VCC voltage can be acquired, if the output voltage limit is exceeded, a collision with the pin 5 voltage occurs and abnormal oscillation due to VCE saturation may occur. In such cases, changes to the antenna structure (VCC midpoint supply) and/or damping of the output level will be required.

## Output Damping Characteristics Sample Data

Rd [Ω]	Output level [Vp-p] Data : high/low	Ra [Ω]	Rb [Ω]	Input level [mVp-p]	Antenna current [mA] Data : high/low	IC current [mA] Data : high/low
3.9	8.5/4.6	15	4.7	180	7.8/3.7	20.5/19.0
2.2	6.9/3.5	15	4.7	180	7.8/3.7	20.5/19.0
1	4.6/2.5	15	4.7	180	7.8/3.7	20.5/19.0
3.9	8.1/4.3	22	6.8	180	7.0/3.1	20.5/19.0
2.2	6.5/3.3	22	6.8	180	7.0/3.1	20.5/19.0
1	4.1/2.3	22	6.8	180	7.0/3.1	20.5/19.0
3.9	7.5/3.5	33	10	180	6.0/2.5	20.5/19.0
2.2	5.8/2.9	33	10	180	6.0/2.5	20.5/19.0
1	3.5/1.9	33	10	180	6.0/2.5	20.5/19.0

## 2. Read amplifier (diode detector, bandpass filter, variable amplifier + fixed amplifier) : Data modulation from the RF signal

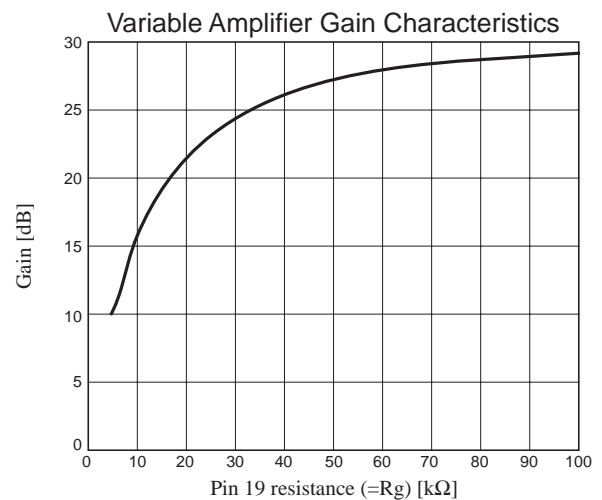
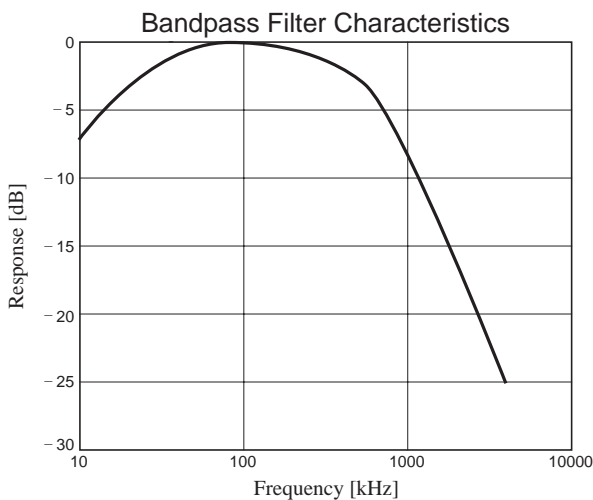
### (1) Level setting

The input level is determined by voltage division by the capacitors connected between pins 21 and 22 and between pins 23 and 24 and the IC internal capacitance. However, note that the input dynamic range of pins 21 and 24 is the same as the VCC voltage.

### (2) Variable amplifier gain setting

The gain is determined by the value of the resistor (Rg) connected between pin 19 and ground.

Note that the range of values that may be used for Rg is from 4.7kΩ (minimum gain) to 100kΩ (maximum gain).



3. Comparator: Used to provide 0V/5V pulse output of the demodulated data.

(1) Setting the input level

Signals from 10mV<sub>p-p</sub> to 2V<sub>pp</sub> can be handled by using capacitor coupling to input the signal to pin 16.

(2) Setting the output load resistance

The load resistance is set so that the pin 15 current capacity is 2.2mA to 5mA.

Note that this will be the range 2.2 k $\Omega$  to 1 k $\Omega$  when  $V_{CC} = 5$  V.

4. Variable threshold TAG detector: Detects tags in the communications area

(1) Setting the input level

The input level is determined by the resistor ( $R_g$ ) connected between pin 19 and ground. Note however, that since the output level can also be modified at the same time by pins 17 and 18, the adjustment described in step (2) of the following item is required.

(2) Setting the detection threshold level

The built-in detector's threshold level can be changed by pin 14, and is set so that it can identify whether or not a TAG is present.

\* : The level goes to 500mV if the pin is left open.

(3) Setting the detection (smoothing) capacitor

The built-in detector's sensitivity is adjusted with pin 9. (Minimum capacitance : 10pF)

(4) Setting the output load resistance

Set the load resistance so that the pin 10 pull-in current is in the range 0.2mA to 0.5mA.

Note that this will be the range 10k $\Omega$  to 24k $\Omega$  when  $V_{CC} = 5$  V.

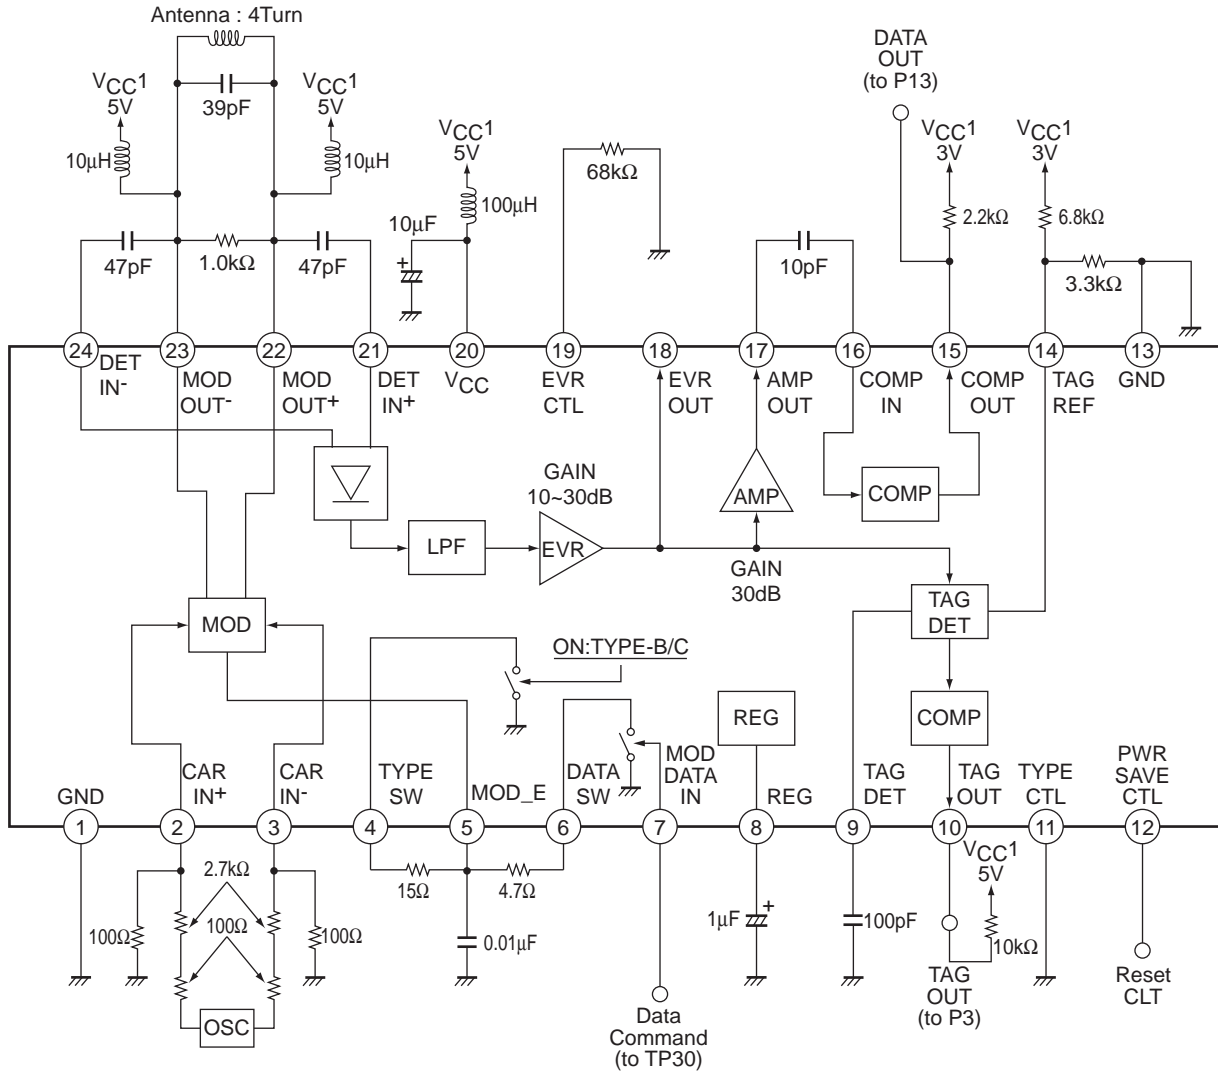
5. Type switching: For IC card type switching

- Low (0V to 1V) : Type B/C read/write communication is possible
- High (2V to  $V_{CC}$ ) : Type A read/write communication is possible

6. Power save mode (muting) switching: Used for low-power mode control and driver amplifier output muting

- Low (0V to 1V) : Normal operation  $\Rightarrow$  Read/write communication is possible
- High (2V to  $V_{CC}$ ) : Power saving mode  $\Rightarrow$  Read/write communication is not possible

Application Circuit Example



- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of March, 2007. Specifications and information herein are subject to change without notice.