



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**FST8460SL  
 THRU  
 FST84100SL**

**Features**

- Metal of siliconrectifier, majonty carrier conducton
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability


**80 Amp  
 Schottky Barrier  
 Rectifier  
 60 to 100 Volts**

**Maximum Ratings**

- Operating Temperature: -40°C to +175°C
- Storage Temperature: -40°C to +150°C

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
FST8460SL	60V	42V	60V
FST8480SL	80V	56V	80V
FST84100SL	100V	70V	100V

**MINIMOD-SL**

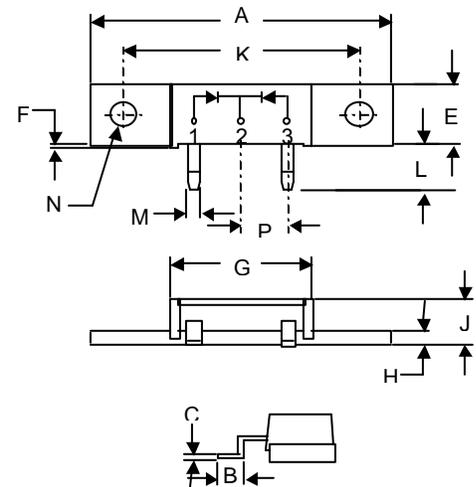

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Average Forward Current	$I_{F(AV)}$	80 A	$T_c = 110^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	800A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	.75 V	$I_{FM} = 40.0\text{A};$ $T_J = 25^\circ\text{C}$
FST8460SL FST8480SL-84100SL		.84 V	
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	1.5mA 35mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Typical Junction Capacitance	$C_J$	1450pF	Measured at 1.0MHz, $V_R=5.0\text{V}$


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.490	1.510	37.85	38.35	
B	.110	.120	2.79	3.04	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	.015	.025	0.38	0.64	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	1.180	1.195	29.97	30.35	
L	.230	.250	5.84	6.35	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Ø
P	.200	REF	5.08	REF	

Pul se Test: Pulse Width 300µsec, Duty Cycle 2%

# FST8460SL thru FST84100SL




Figure 1  
Typical Forward Characteristics

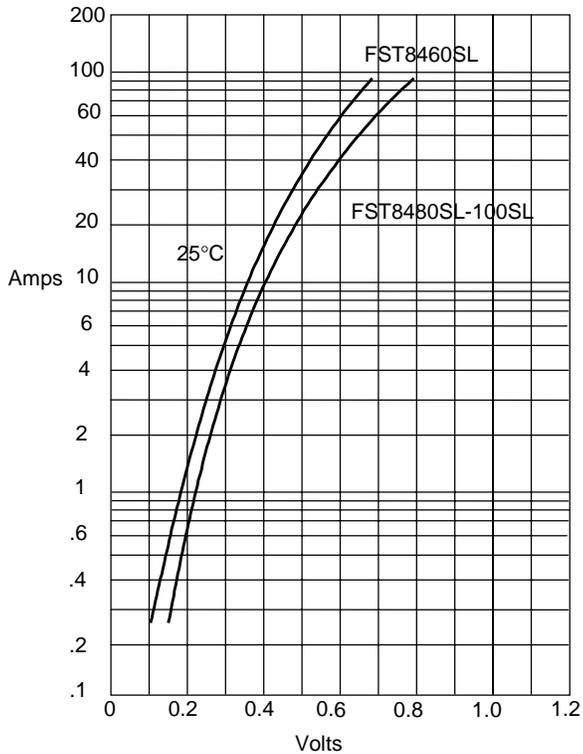


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

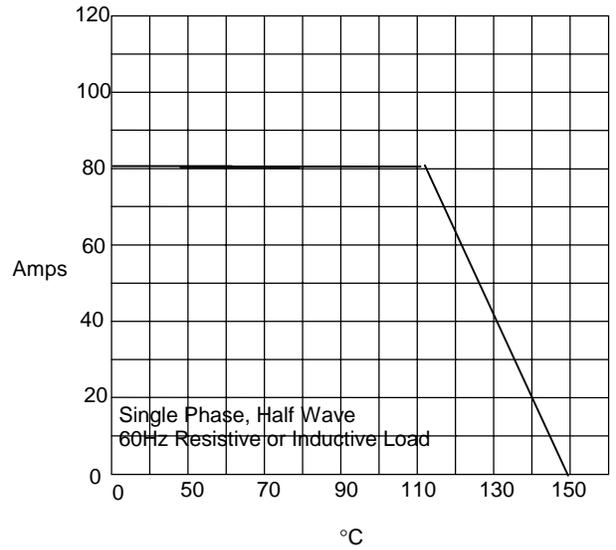


Average Forward Rectified Current - Amperes versus  
Case Temperature - °C

Figure 3  
Junction Capacitance

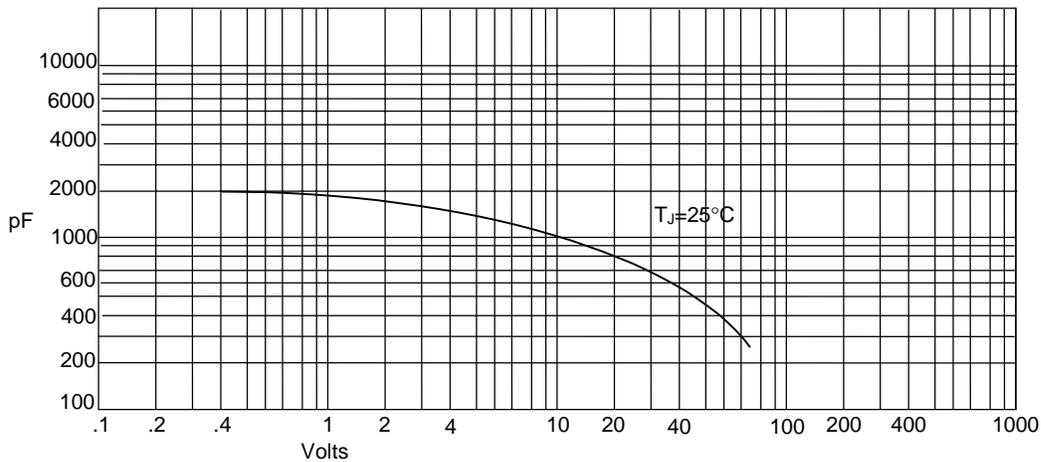


Junction Capacitance - pF versus  
Reverse Voltage - Volts

Figure 4  
Typical Reverse Characteristics

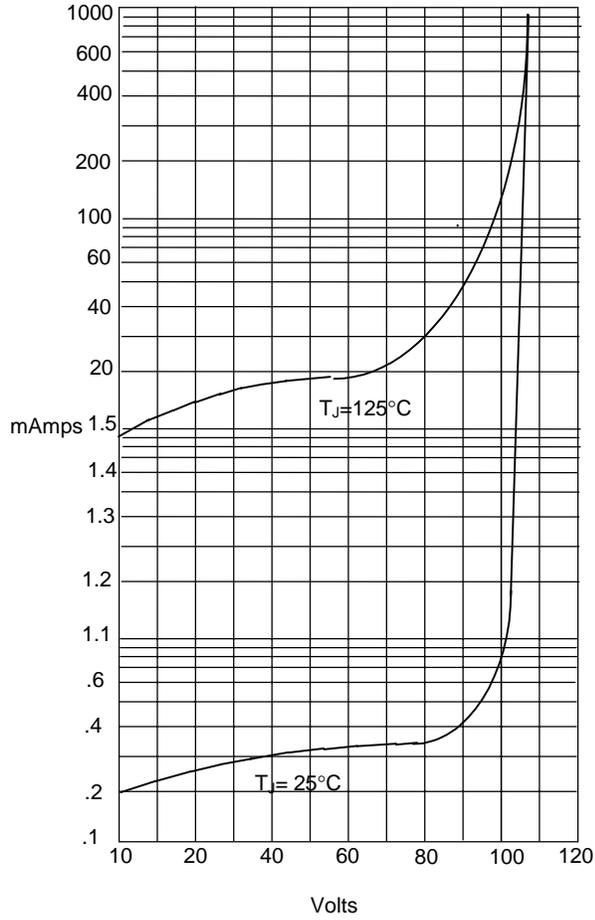

Instantaneous Reverse Leakage Current - MicroAmperes *versus*  
Percent Of Rated Peak Reverse Voltage - Volts

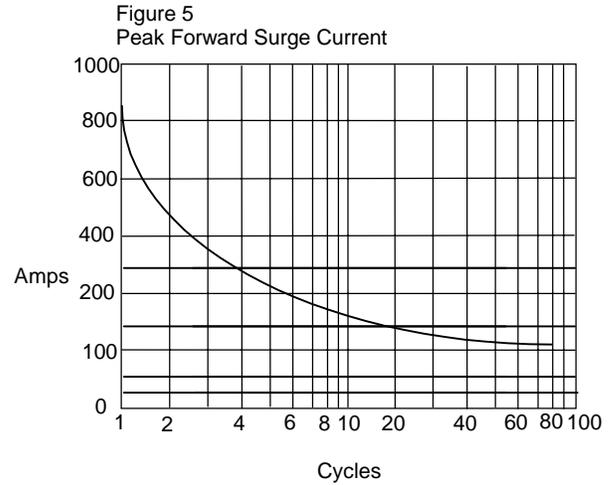

Peak Forward Surge Current - Amperes *versus*  
Number Of Cycles At 60Hz - Cycles