

## **Double-Balanced Mixer**

Rev. V3

#### **Features**

- LO 7 TO 17 GHz
- RF 9 TO 15 GHz
- IF DC TO 2.5 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- LOW NOISE FIGURE: 6.5 dB (TYP.)


## **Description**

The M67 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

# **Ordering Information**

Part Number	Package
M67	Minpac
M67C	SMA Connectorized

# Product Image



# Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
raiametei	rest conditions			+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Fig- ure (max)	fR = 9.5 to 13 GHz, fL = 9 to 13.5 GHz, fI = 30 to 500 GHz fR = 9 to 15 GHz, fL = 8 to 16 GHz, fI = 30 to 1000 GHz fR = 9 to 15 GHz, fL = 7 to 17 GHz, fI = 30 to 2000 GHz fR = 9.5 to 13.5 GHz, fL = 7 to 16 GHz, fI = 30 to 2500 GHz	dB dB dB dB	5.5 6.5 6.5 6.5	7.0 8.5 9.0 9.0	7.5 9.0 9.5 9.5
Isolation, L to R (min)	fL = 7 to 15 GHz fL = 15 to 17 GHz	dB dB	40 30	22 10	20 8
Isolation, L to I (min)	I, L to I (min) fL = 7 to 17 GHz		25	15	13
1 dB Conversion Comp. fL = +10 dBm		dBm	+4		
Input IP3	fR1=11.5 GHz at -6 dBm,fR2=11.5GHz at -6 dBm, fL = 12 GHz at = +10 dBm	dBm	+11		




## **Double-Balanced Mixer**


Rev. V3


# **Typical Performance Curves**

#### Conversion Loss vs. LO Drive




#### Conversion Loss vs. Frequency






#### Conversion Loss vs. Output Frequency




Commitment to produce in volume is not guaranteed.


#### Conversion Loss vs. RF Input Power



#### Isolation vs. Frequency



## L-Port VSWR vs. Frequency



- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.




## **Double-Balanced Mixer**

Rev. V3


# **Absolute Maximum Ratings**

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +100°C		
Peak Input Current	50 mA DC		

#### R-Port VSWR vs. Frequency




## I-Port VSWR vs. f




## 1.0 = 2500 MHz 2.0 VSWR 3.0 10 12 14 fl FREQUENCY-GHZ

# Outline Drawing: Minpac \*

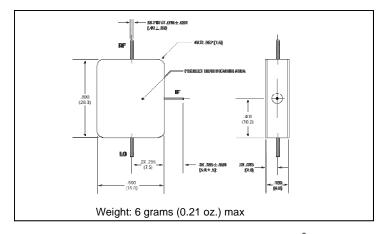

# Outline Drawing: SMA Connectorized \*

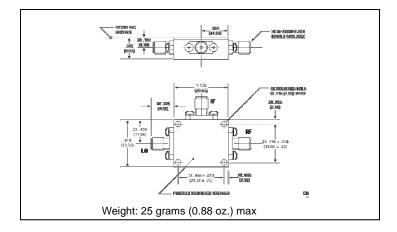

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

3

• India Tel: +91.80.4155721

• China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.