


U - Package Outline

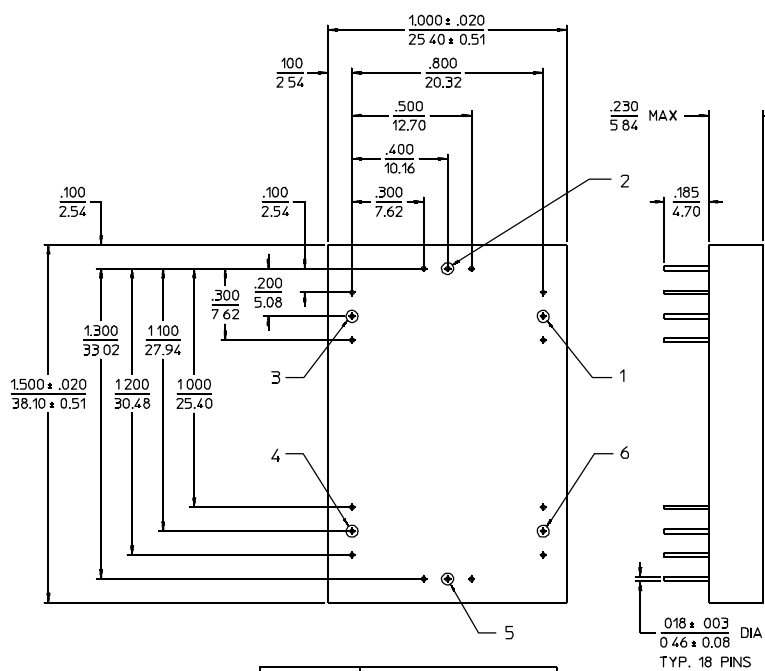

Pin No.	Function
1	Phase Adjust
2	LO Input
3	I Output
4	Amplitude Adjust
5	RF Input
6	Q Output

NOTES:

1. Tolerance on 3 place decimals $\pm 0.010(.25)$ except as noted.
2. Dimensions in inches over millimeters.
3. Lead dimensions apply only at body.
4. All unmarked pins are case ground.

PRINCIPAL SPECIFICATIONS

Model Number	LO Freq, f_o , MHz	[†] Bandwidth RF Input
IQP-27U-***B	20 - 200	10% of f_o

For complete Model Number replace *** with desired LO Frequency in MHz.

GENERAL SPECIFICATIONS

RF and LO Input Characteristics

- Impedance: 50 Ω nom.
- VSWR: 1.5:1 max.
- RF Power Level: 0 dBm nom.
- LO Power Level: +10 dBm nom.

I & Q Output Characteristics

- Video Bandwidth: DC to [†]50 MHz nom.
- Output Impedance: 50 Ω nom.

Conversion Loss

- (RF to I or Q): 10 dB typ, 12 dB max.

IF Balance (I to Q) @ $V_c = +5V$

- Phase: $90^\circ \pm 2^\circ$
- Amplitude: 0 ± 0.2 dB

Bias Controls, @ f_o :

- Phase Tuning Range: $\pm 10^\circ$ nom.
- Amplitude Range: ± 1 dB nom.
- Temperature Stability: ± 0.2 dB, $\pm 1^\circ$ max.

Operating Temperature: -55° to +85°C

- Weight, nominal: 0.55 oz (15.4 g)

[†]RF and Video Bandwidths are typically much greater than specified.

AVAILABLE OPTIONS

- Higher Level Mixers: Contact Factory
- Higher Frequencies: Contact Factory


General Notes:

1. I & Q networks are integrated devices that produce two quadrature-phased, equal amplitude signals when fed RF and LO signals.
2. The IQP-27L series features in-circuit, voltage controlled phase and amplitude balance adjustments that allow fine adjustments when the device is in its normal operating environment. These features provides accuracy not previously attainable in a comparably small package. In addition, the voltage controlled phase and amplitude balance inputs facilitate closed loop, servo operation using the adjustment inputs in the feedback loops.
3. Merrimac I & Q networks comply with the relevant sections of MIL-M-28837 and may be supplied screened for compliance with additional specifications for military and space applications requiring the highest reliability.

13Feb96

Demodulator


Modulator




Typical IQP-27U performance; 120 MHz LO design

Temperature °C	LO Freq. (MHz)	RF Freq. (MHz)	Phase Balance	Amplitude Balance	Conversion Loss
+85°C	120.0 @ +10 dBm	120.1 @ 0 dBm	89.5°	0.02 dB	11.5 dB
+60°C	120.0 @ +10 dBm	120.1 @ 0 dBm	89.8°	0.00 dB	11.5 dB
+25°C	120.0 @ +10 dBm	120.1 @ 0 dBm	90.0°	0.00 dB	11.5 dB
0°C	120.0 @ +10 dBm	120.1 @ 0 dBm	90.4°	0.03 dB	11.5 dB


Typical Performance at +25°C

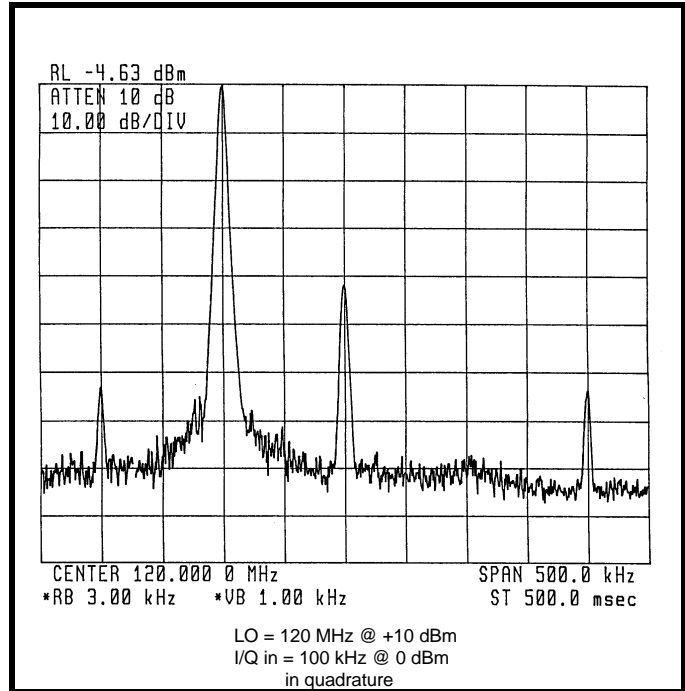

Typical Performance at -55°C

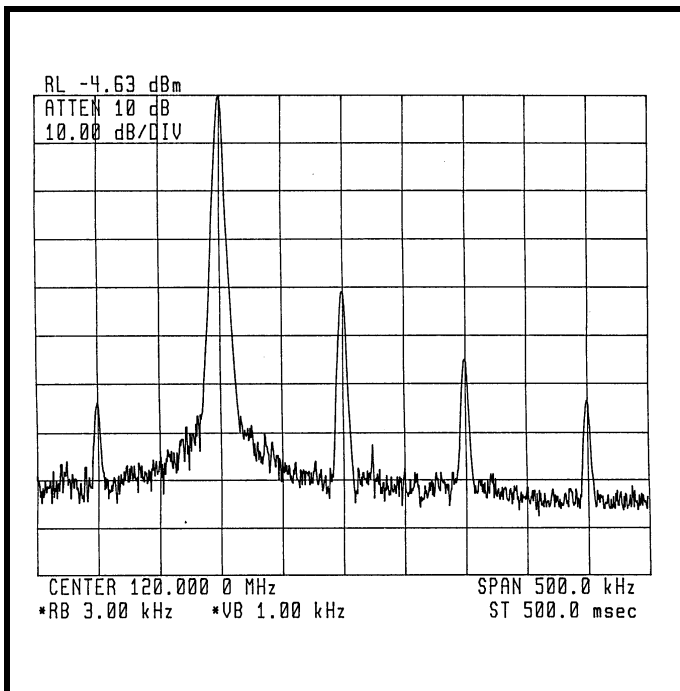

Typical Performance at +85°C

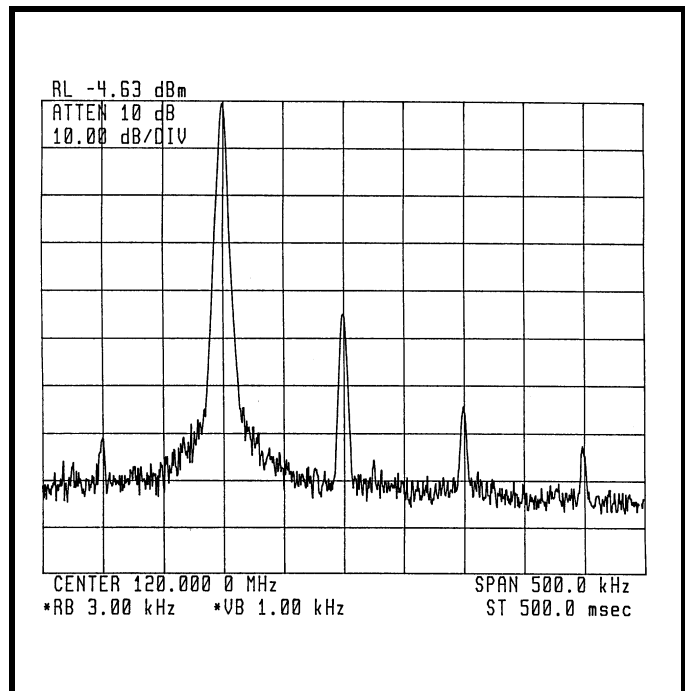

24May96