


AMMP-6233

18 to 32 GHz GaAs Low Noise Amplifier



Data Sheet



Description

Avago Technologies' AMMP-6233 is a high gain, low-noise amplifier that operates from 18 GHz to 32 GHz. It has a 3 dB noise figure, over 20 dB of gain and designed to be an easy-to-use drop-in with any surface mount PCB application. Popular applications include microwave radios, 802.16 and satellite VSAT or DBS receivers. The fully integrated microwave circuit eliminated the complex tuning and assembly processes typically required by hybrid (discrete-FET) amplifiers. The surface mount package allows elimination of "chip & wire" assembly for lower cost. The device has 50 Ω input and output match and is unconditionally stable. The MMIC has fully integrated input and output DC blocking capacitors and bias choke. The backside of the package is both RF and DC ground that simplifies the assembly process. It is fabricated in a PHEMT process to provide exceptional low noise and gain performance.


Features

- Surface Mount Package, 5.0 x 5.0 x 1.25 mm
- Integrated DC block and choke
- 50 Ω Input and Output Match
- Single Positive Supply Pin
- No Negative Gate Bias

Specifications (Vd=3.0V, Idd=65mA)

- Broadband RF from 18 to 32 GHz
- High Gain of 23dB
- Low Gain Flatness: ± 1 dB
- Typical Noise Figure of 2.6 dB
- Typical OIP3 of 19dBm

Pin Connections (Top View)



| Pin | Function |
|-----|----------|
| 1 | |
| 2 | Vdd |
| 3 | |
| 4 | RFout |
| 5 | |
| 6 | |
| 7 | |
| 8 | RFIn |

Applications

- Microwave Radio systems
- Satellite VSAT, DBS Up/Down Link
- LMDS & Pt-Pt mmW Long Haul
- Broadband Wireless Access (including 802.16 and 802.20 WiMax)
- WLL and MMDS loops
- Commercial grade military



NOTE: THESE DEVICES ARE ESD SENSITIVE. THE FOLLOWING PRECAUTIONS ARE STRONGLY RECOMMENDED. ENSURE THAT AN ESD APPROVED CARRIER IS USED WHEN UNITS ARE TRANSPORTED FROM ONE DESTINATION TO ANOTHER. PERSONAL GROUNDING IS TO BE WORN AT ALL TIMES WHEN HANDLING THESE DEVICES. THE MANUFACTURER ASSUMES NO RESPONSIBILITIES FOR ESD DAMAGE DUE TO IMPROPER STORAGE AND HANDLING OF THESE DEVICES.

Absolute Maximum Ratings ⁽¹⁾

| Sym | Parameters/Condition | Unit | Max |
|------|-------------------------|------|-------------|
| Vd | Drain to Ground Voltage | V | 5.5 |
| Id | Drain Current | mA | 100 |
| Pin | RF CW Input Power Max | dBm | 10 |
| Tch | Max channel temperature | C | +150 |
| Tstg | Storage temperature | C | -65 +150 |
| Tmax | Maximum Assembly Temp | C | 260 for 20s |

Notes:

1. Operation in excess of any of these conditions may result in permanent damage to this device. The absolute maximum ratings for Vd, Id and Pin were determined at an ambient temperature of 25°C unless noted otherwise.

DC Specifications/ Physical Properties ⁽²⁾

| Sym | Parameter and Test Condition | Unit | Min | Typ | Max |
|-----------------|--|------|-----|-----|-----|
| Idd | Drain Supply Current under any RF power drive and temp. (V _{dd} =3.0 V) | mA | 40 | 65 | 90 |
| Vd | Drain Supply Voltage | V | | 3 | 5 |
| θ _{jc} | Thermal Resistance ⁽³⁾ | C/W | | 27 | |

Notes:

2. Ambient operational temperature TA=25°C unless noted
3. Channel-to-backside Thermal Resistance (T_{channel} = 34°C) as measured using infrared microscopy. Thermal Resistance at backside temp. (T_b) = 25°C calculated from measured data.

AMMP-6233 RF Specifications ^(4,5,6)

TA= 25°C, V_{dd}=3.0 V, I_{dd}= 65 mA, Z_{in}=Z_o=50 Ω

| Symbol | Parameters and Test Conditions | Freq | Units | Min. | Typ. | Max. |
|-------------------|--------------------------------------|-------|-------|------|------|------|
| Freq | Operational Frequency | | GHz | 18 | | 32 |
| Gain | RF Small Signal Gain | 18GHz | dB | 19 | 23.2 | |
| | | 26GHz | dB | 20.8 | 24.4 | |
| | | 29GHz | dB | 20 | 23.6 | |
| NF | Noise Figure into 50Ω | 18GHz | dB | | 2.6 | 3.6 |
| | | 26GHz | dB | | 2.2 | 3.2 |
| | | 29GHz | dB | | 2.6 | 3.5 |
| R _{lin} | Input Return Loss | | dB | -10 | | |
| R _{lout} | Output Return Loss | | dB | -13 | | |
| Iso | Isolation | | dB | -45 | | |
| P1dB | Output Power at 1dB gain compression | | dBm | 8 | | |
| OIP3 | Output Third Order Intercept Point | | dBm | 18 | | |

Notes:

4. Small/Large -signal data measured in a fully de-embedded test fixture form TA = 25°C.
5. Specifications are derived from measurements in a 50 Ω test environment. Aspects of the amplifier performance may be improved over a narrower bandwidth by application of additional conjugate, linearity, or low noise (Gopt) matching.
6. All tested parameters guaranteed with measurement accuracy +/-0.5dB for NF and +/-1dB for gain at 18GHz, 26GHz and +/-1.5dB for gain at 29GHz.

AMMP-6233 Typical Performance [1], [2]

(TA = 25°C, Vdd=3V, Idd=65mA, Zin = Zout = 50 Ω unless noted)

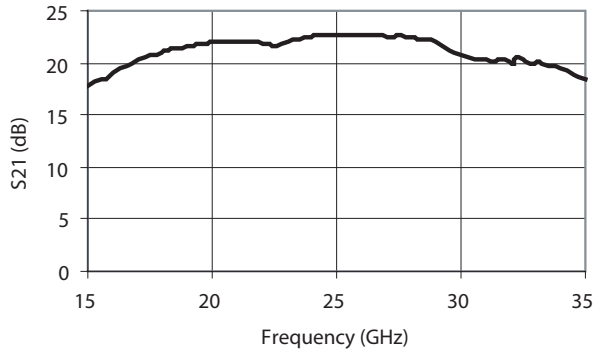


Figure 1. Gain

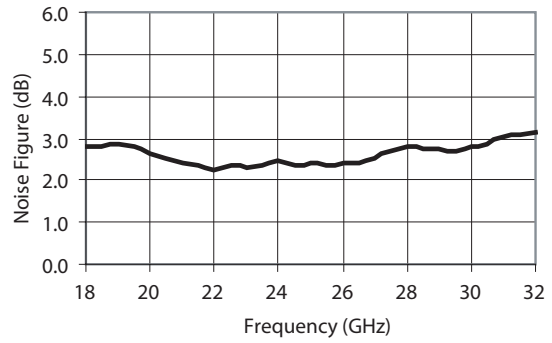


Figure 2. Noise Figure

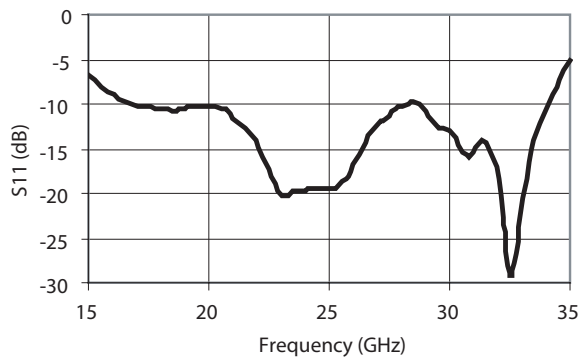


Figure 3. Input Return Loss

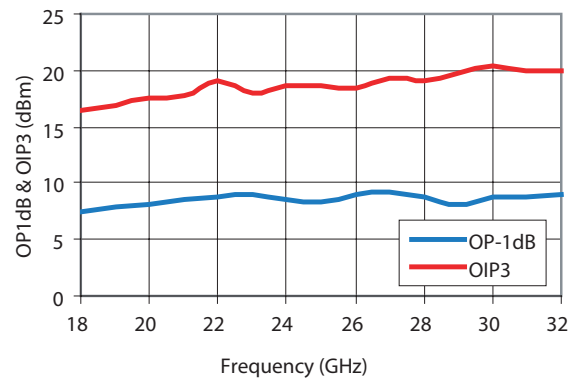


Figure 4. Output P-1dB and Output IP3

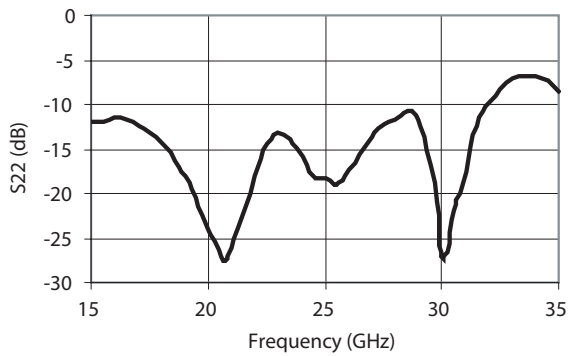


Figure 5. Output Return Loss

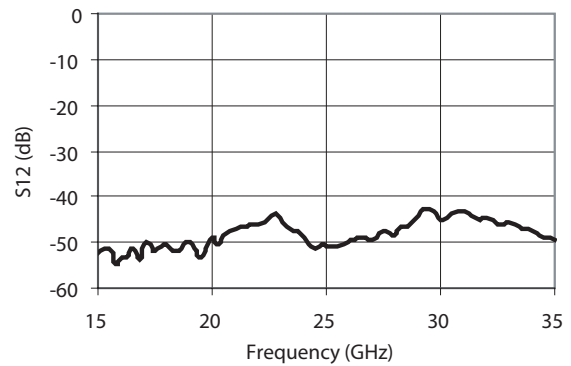


Figure 6. Isolation

AMMP-6233 Typical Performance (cont) [1], [2]

(TA = 25°C, Vdd=3V, Idd=65mA, Zin = Zout = 50 Ω unless noted)

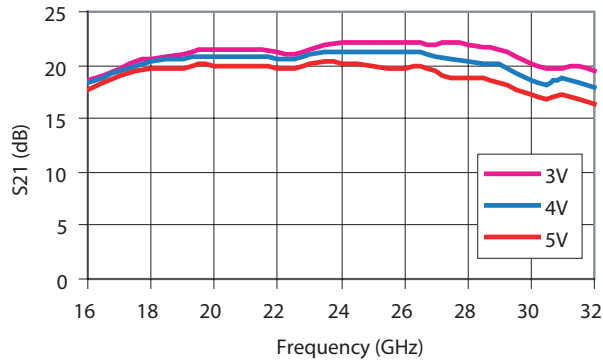


Figure 7. Gain over Vdd

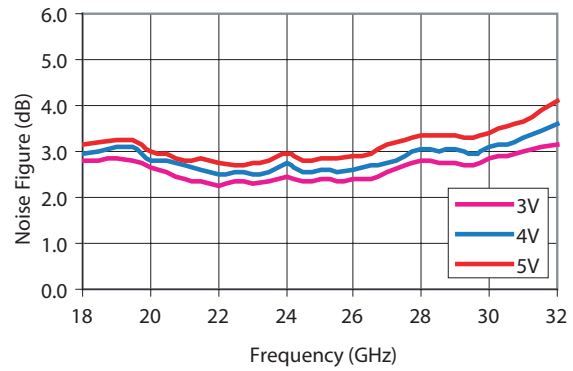


Figure 8. Noise Figure over Vdd

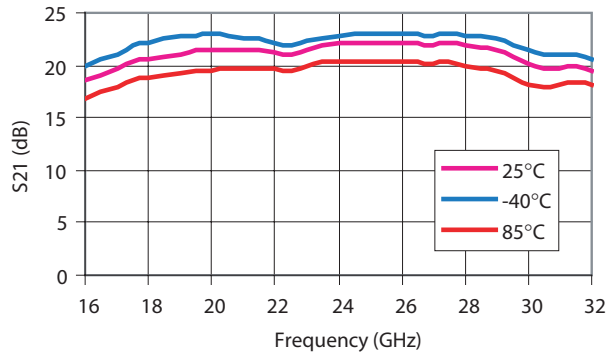


Figure 9. Gain over Temperature

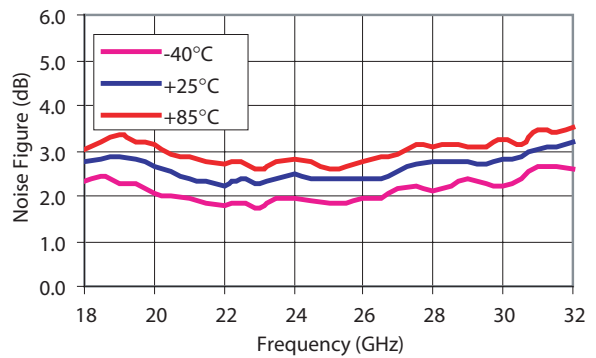


Figure 10. Noise Figure over Temperature

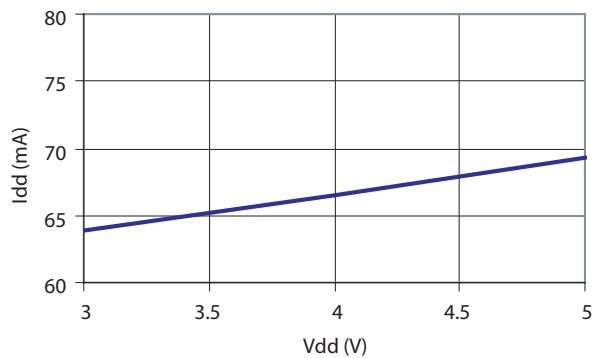


Figure 11. Idd over Vdd


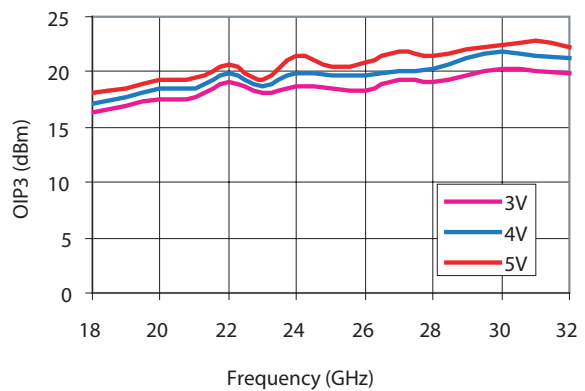


Figure 12. Output IP3 over Vdd

Note:

1. S-parameters are taken with the Evaluation Board as shown in Figure 14. Effects of board and connector are included in the graphs. Loss of board and connector are de-embedded from Gain data.
2. Noise Figure is measured with a 3-dB pad at the input of the device. Losses are de-embedded from the data shown in Figure 2, 8 and 10.

AMMP-6233 Application and Usage

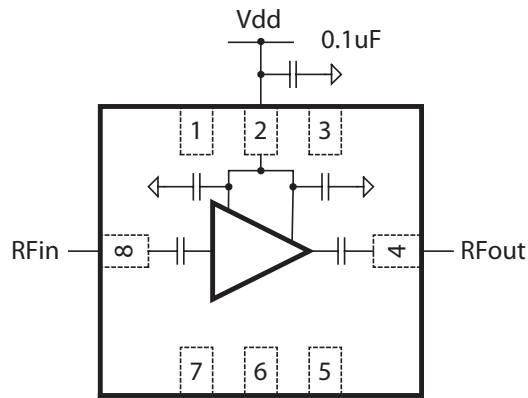

AMMP-6233

Figure 13. Application of AMMP-6233

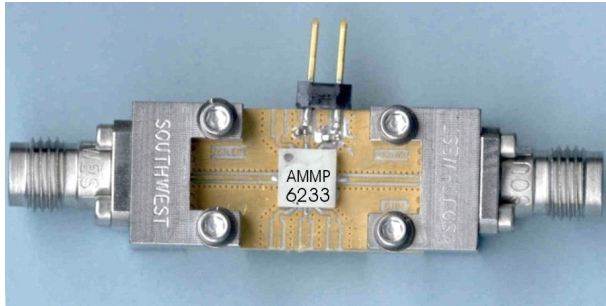


Figure 14. Evaluation / Test Board (Available to qualified customer requests)

Biasing and Operation

The AMMP-6233 is normally biased with a positive drain supply connected to the VDD pin through a 0.1 uF bypass capacitor as shown in Figure 13. The recommended drain supply voltage is 3V. It is important to have 0.1 uF bypass capacitor, and the capacitor should be placed as close to the component as possible. Input and output ports are DC-blocked. Impedance matching at input and output ports are achieved on-chip, therefore, no extra external component is needed. Aspects of the amplifier performance may be improved over a narrower bandwidth by application of additional conjugate, linearity, or low noise (Γ_{opt}) matching. No ground wires are needed because all ground connections are made with plated through-holes to the backside of the package.

Refer the Absolute Maximum Ratings table for allowed DC and thermal condition

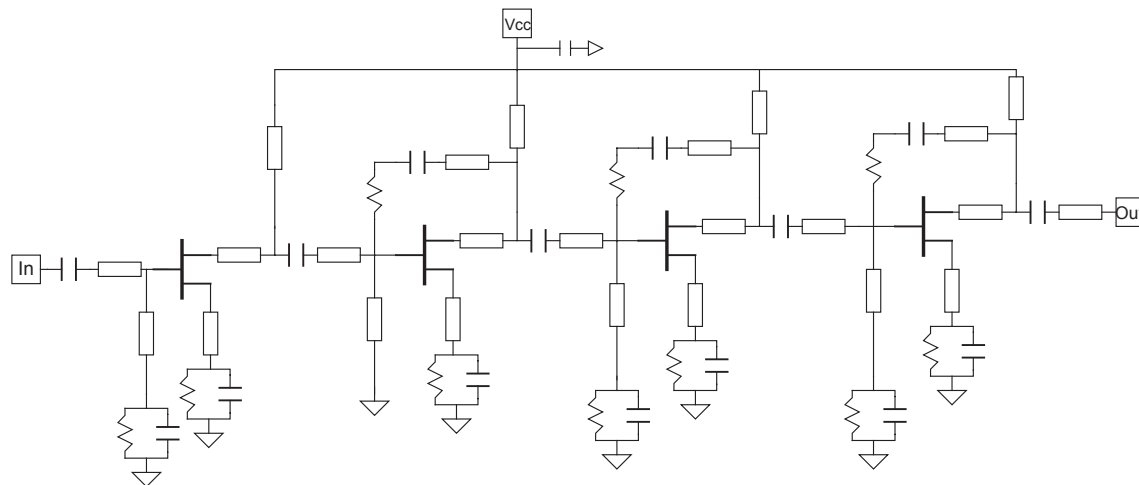


Figure 15. Simplified LNA Schematic

Recommended SMT Attachment for 5x5 Package

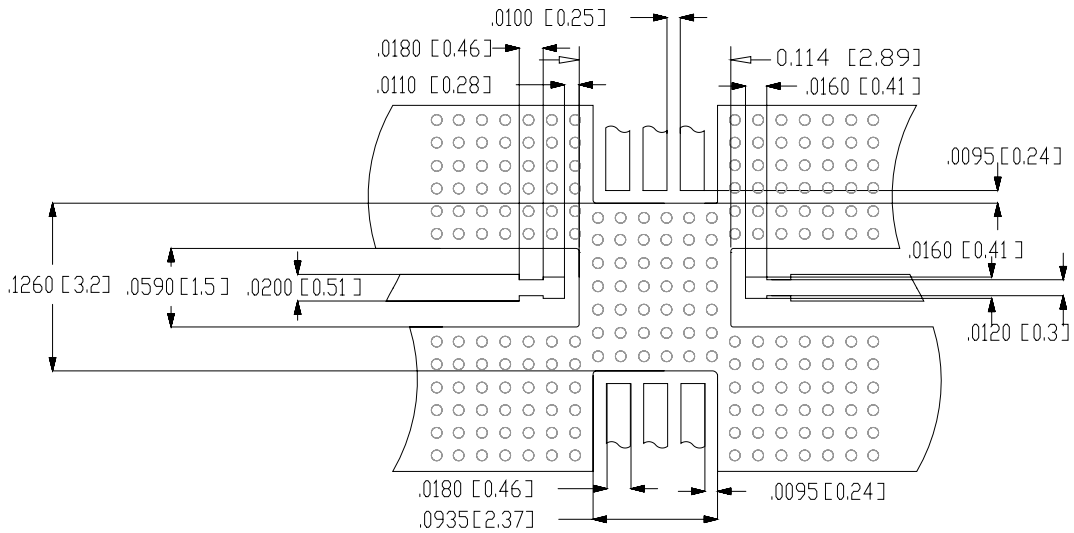


Figure 16a. PCB Land Pattern

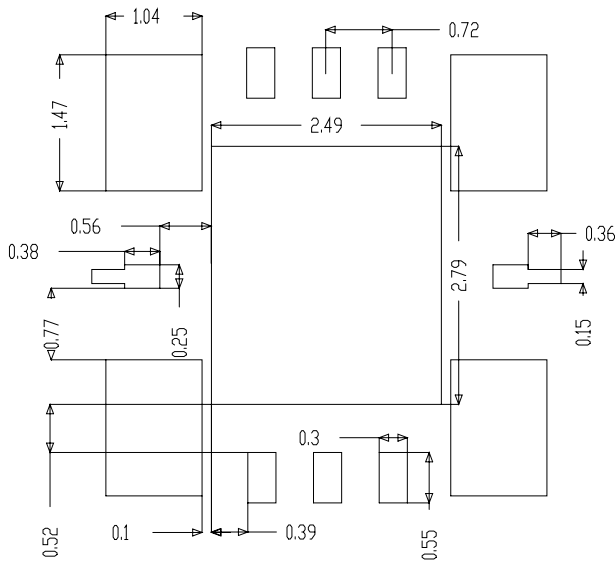


Figure 16b. PCB Stencil Layouts

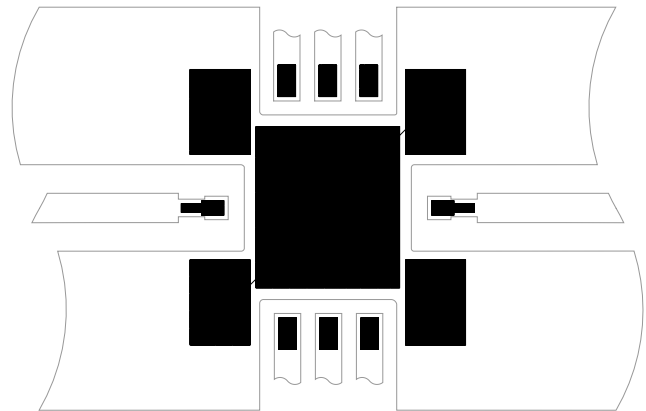


Figure 16c. PCB Land Pattern with Stencil Layouts

NOTES:

DIMENSIONS ARE IN INCHES [MILIMETERS]
 ALL GROUNDS MUST BE SOLDERED TO PCB RF
 Material is Rogers RO4350, 0.010" thick

The AMMP Packaged Devices are compatible with high volume surface mount PCB assembly processes.

The PCB material and mounting pattern, as defined in the data sheet, optimizes RF performance and is strongly recommended. An electronic drawing of the land pattern is available upon request from Avago Sales & Application Engineering.

Manual Assembly

- Follow ESD precautions while handling packages.
- Handling should be along the edges with tweezers.
- Recommended attachment is conductive solder paste. Please see recommended solder reflow profile. Neither Conductive epoxy or hand soldering is recommended.
- Apply solder paste using a stencil printer or dot placement. The volume of solder paste will be dependent on PCB and component layout and should be controlled to ensure consistent mechanical and electrical performance.
- Follow solder paste and vendor's recommendations when developing a solder reflow profile. A standard profile will have a steady ramp up from room temperature to the pre-heat temp. to avoid damage due to thermal shock.
- Packages have been qualified to withstand a peak temperature of 260°C for 20 seconds. Verify that the profile will not expose device beyond these limits.


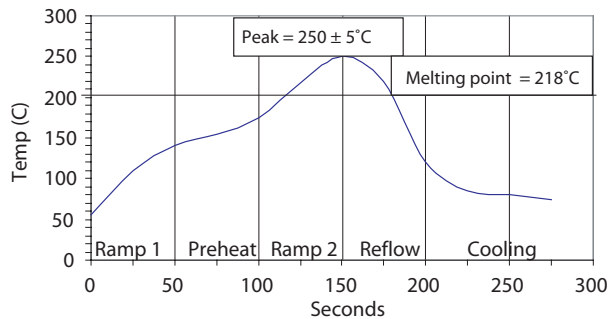


Figure 17. Suggested Lead-Free Reflow Profile for SnAgCu Solder Paste


A properly designed solder screen or stencil is required to ensure optimum amount of solder paste is deposited onto the PCB pads. The recommended stencil layout is shown in Figure 16. The stencil has a solder paste deposition opening approximately 70% to 90% of the PCB pad. Reducing stencil opening can potentially generate more voids underneath. On the other hand, stencil openings larger than 100% will lead to excessive solder paste smear or bridging across the I/O pads. Considering the fact that solder paste thickness will directly affect the quality of the solder joint, a good choice is to use a laser cut stencil composed of 0.127mm (5 mils) thick stainless steel which is capable of producing the required fine stencil outline.

The most commonly used solder reflow method is accomplished in a belt furnace using convection heat transfer. The suggested reflow profile for automated reflow processes is shown in Figure 17. This profile is designed to ensure reliable finished joints. However, the profile indicated in Figure 1 will vary among different solder pastes from different manufacturers and is shown here for reference only.

Package, Tape & Reel, and Ordering Information


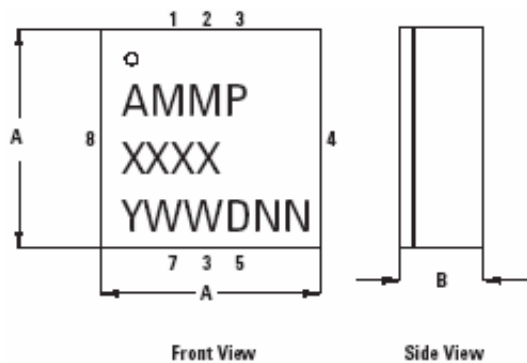


| Symbol | Min | Max |
|--------|---------------|--------------|
| A | 0.198 (5.03) | 0.213 (5.4) |
| B | 0.0685 (1.74) | 0.088 (2.25) |

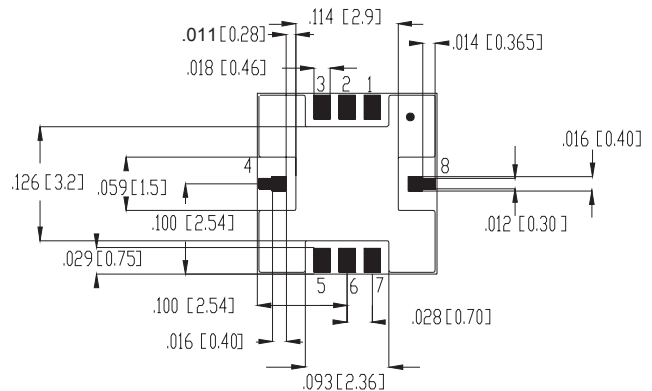

Back View

Carrier Tape and Pocket Dimensions

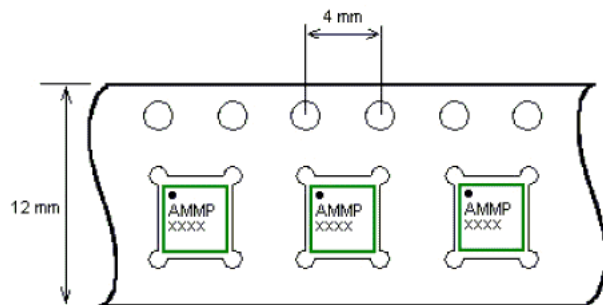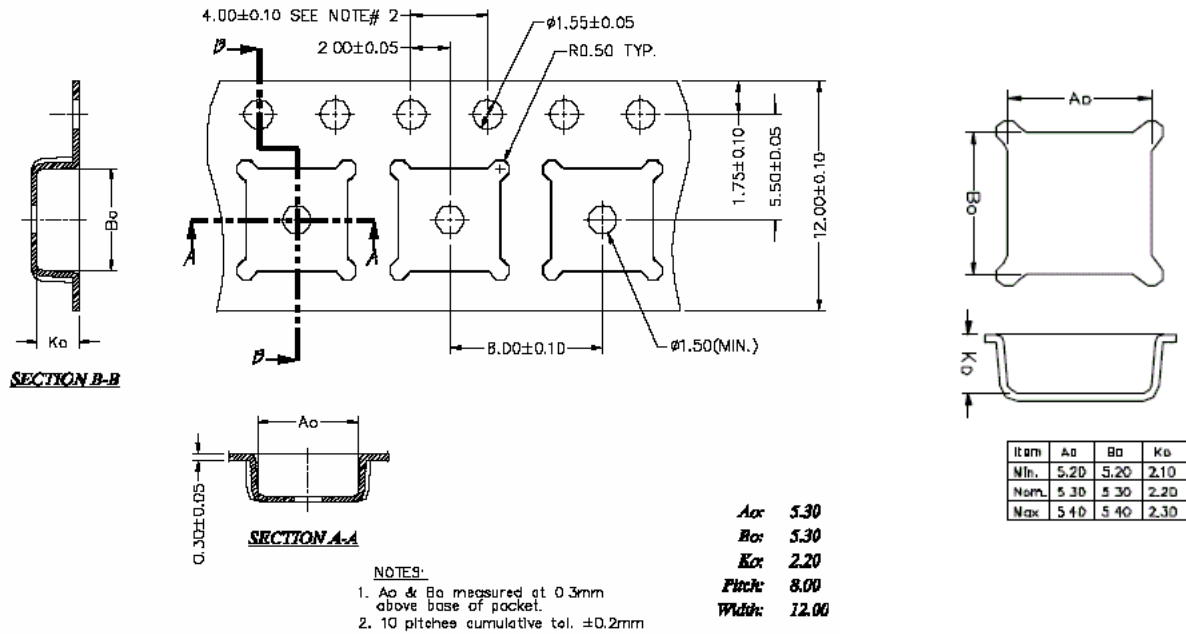

AMMP-6233 Part Number Ordering Information

| Part Number | Devices Per Container | Container |
|----------------|-----------------------|----------------|
| AMMP-6233-BLKG | 10 | Antistatic bag |
| AMMP-6233-TR1G | 100 | 7" Reel |
| AMMP-6233-TR2G | 500 | 7" Reel |

Note: No RF performance degradation is seen due to ESD upto 50V HBM and 200V MM. The DC characteristics in general show increased leakage at lower ESD discharge voltages. The user is reminded that this device is ESD sensitive and needs to be handled with all necessary ESD protocols.

For product information and a complete list of distributors, please go to our web site:

www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2006 Avago Technologies Limited. All rights reserved. Obsoletes AV01-0666EN AV02-0489EN - June 12, 2007

AVAGO
TECHNOLOGIES