

# SG6859A

## Low-Cost, Green-Mode PWM Controller for Flyback Converters

### Features

- Green-Mode PWM
- Supports the “Blue Angel” Standard
- Low Startup Current: 9 $\mu$ A
- Low Operating Current: 3mA
- 300mA Driving Capability
- Leading-Edge Blanking
- Constant Output Power Limit
- Universal Input
- Built-in Synchronized Slope Compensation
- Current-Mode Operation
- Cycle-by-cycle Current Limiting
- Under-Voltage Lockout (UVLO)
- Programmable PWM Frequency with Frequency Hopping
- V<sub>DD</sub> Over-Voltage Protection (Auto Restart)
- Gate Output Voltage Clamped at 17V
- Low Cost
- Few External Components Required
- Small SSOT-6 Package

### Applications

General-purpose switching mode power supplies and flyback power converters, such as:

- Battery chargers for cellular phones, cordless phones, PDAs, digital cameras, and power tools
- Power adapters for ink jet printers, video game consoles, and portable audio players
- Open-frame SMPS for TV/DVD standby and auxiliary supplies, home appliances, and consumer electronics
- Replacements for linear transformers and RCC SMPS
- PC 5V standby power

### Description

This highly integrated PWM controller provides several enhancements designed to meet the low standby-power needs of low-power SMPS. To minimize standby power consumption, the proprietary green-mode function provides off-time modulation to linearly decrease the switching frequency under light-load conditions. This green-mode function enables the power supply to meet even the strictest power conservation requirements.

The BiCMOS fabrication process enables reducing the startup current to 9 $\mu$ A and the operating current to 3mA. To further improve power conservation, a large startup resistance can be used. Built-in synchronized slope compensation ensures the stability of peak current mode control. Proprietary internal compensation provides a constant output power limit over a universal AC input range (90V<sub>AC</sub> to 264V<sub>AC</sub>). Pulse-by-pulse current limiting ensures safe operation during short-circuits.

To protect the external power MOSFET from damage by supply over voltage, the SG6859A's output driver is clamped at 17V. SG6859A controllers can be used to improve the performance and reduce the production cost of power supplies. The best choice for replacing linear and RCC-mode power adapters, the SG6859A is available in 8-pin DIP and 6-pin SSOT-6 packages.

## Ordering Information

| Part Number | Operating Temperature Range | Package | Eco Status | Packing Method |
|-------------|-----------------------------|---------|------------|----------------|
| SG6859ATZ   | -40 to +105°C               | SSOT-6  | RoHS       | Tape & Reel    |
| SG6859ATY   | -40 to +105°C               | SSOT-6  | Green      | Tape & Reel    |
| SG6859ADZ   | -40 to +105°C               | DIP-8   | RoHS       | Tube           |
| SG6859ADY   | -40 to +105°C               | DIP-8   | Green      | Tube           |

For Fairchild's definition of Eco Status, please visit: [http://www.fairchildsemi.com/company/green/rohs\\_green.html](http://www.fairchildsemi.com/company/green/rohs_green.html)

## Application Diagram

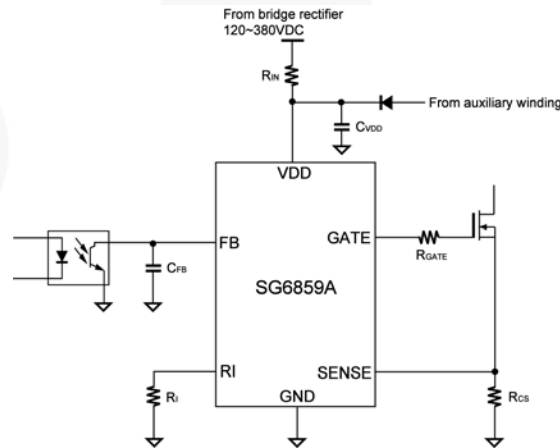


Figure 1. Typical Application

## Internal Block Diagram


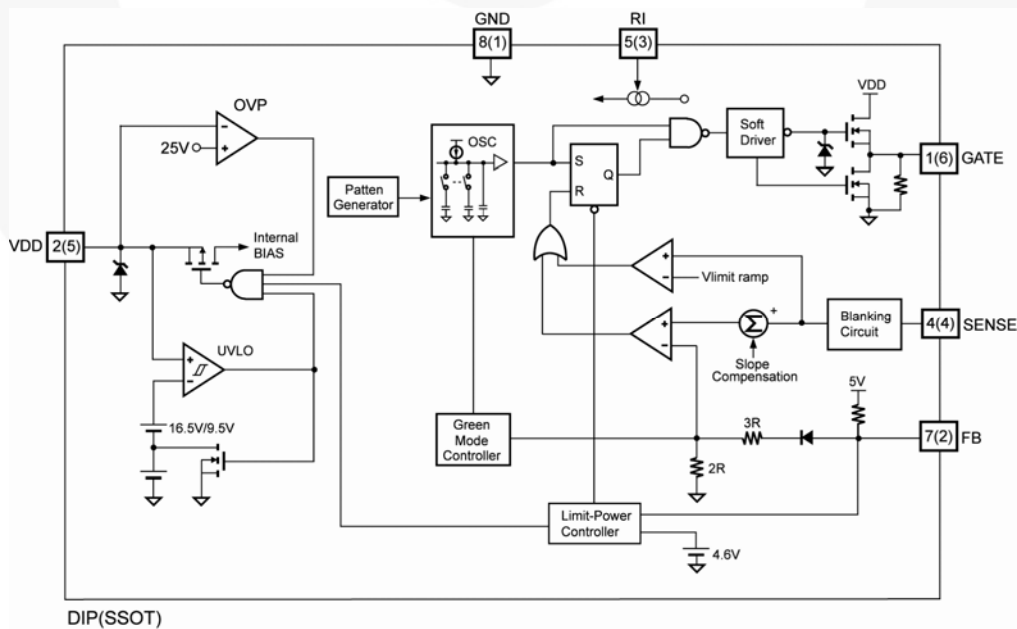



Figure 2. Functional Block Diagram

## Marking Information




AAJF: SG6859A  
 W: Week Code  
 A~Z=W1~W26  
 A~Z=W27~W52  
 — : Lead Free Package

\*Marking for SG6859ATZ (Pb-free)




XXXX: AAJF=SG6859A  
 T : Die Run Code  
 . . . . : Year Code  
 - - - : Week Code

\*Marking for SG6859ATY (Green Compound)



T: D=DIP  
 P: Z= Lead Free + RoHS Compatible  
 Null=Regular Package  
 XXXXXXXX: Wafer Lot  
 Y: Year  
 WW: Week  
 V: Assembly Location

\*Marking for SG6859ADZ (Pb-free)



F- Fairchild Logo  
 Z- Plant Code  
 X- 1-Digit Year Code  
 Y- 1-Digit Week Code  
 TT: 2-Digit Die Run Code  
 T: Package Type (D=DIP)  
 P: Y: Green Package  
 M: Manufacture Flow Code

\*Marking for SG6859ADY (Green Compound)

Figure 3. Top Mark

## Pin Configurations

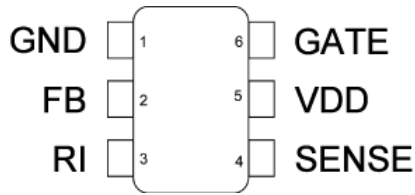


Figure 4. SSOT-6 Pin Configuration

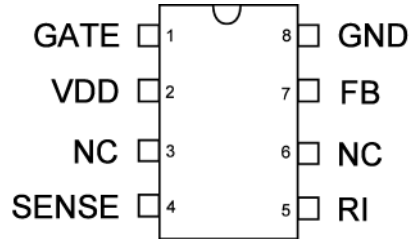


Figure 5. DIP-8 Pin Configuration

## Pin Definitions

| DIP Pin # | SSOT Pin # | Name  | Description   |
|-----------|------------|-------|---|
| 1         | 6          | GATE  | The totem-pole output driver for driving the power MOSFET.  |
| 2         | 5          | VDD   | Power supply  |
| 3         |            | NC    | No connection   |
| 4         | 4          | SENSE | Current sense. This pin senses the voltage across a resistor. When the voltage reaches the internal threshold, PWM output is disabled. This activates over-current protection. This pin also provides current amplitude information for current-mode control.   |
| 5         | 3          | RI    | A resistor connected from the RI pin to ground generates a constant current source used to charge an internal capacitor and determine the switching frequency. Increasing the resistance reduces the amplitude of the current source and the switching frequency. A 95kΩ resistor R <sub>I</sub> results in a 50μA constant current I <sub>I</sub> and a 70kHz switching frequency. |
| 6         |            | NC    | No connection   |
| 7         | 2          | FB    | Feedback. The FB pin provides the output voltage regulation signal. It provides feedback to the internal PWM comparator, so that the PWM comparator can control the duty cycle.   |
| 8         | 1          | GND   | Ground  |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol             | Parameter  | Min. | Max. | Unit |
|--------------------|--|------|------|------|
| V <sub>VDD</sub>   | DC Supply Voltage <sup>(1, 2)</sup>                                  |      | 30   | V    |
| V <sub>FB</sub>    | Input Voltage to FB Pin  | -0.3 | 7.0  | V    |
| V <sub>SENSE</sub> | Input Voltage to Sense Pin   | -0.3 | 7.0  | V    |
| T <sub>J</sub>     | Operating Junction Temperature                                       |      | 150  | °C   |
| Θ <sub>JA</sub>    | Thermal Resistance (Junction-to-Air)                                 | SSOT | 273  | °C/W |
|                    |  | DIP  | 113  | °C/W |
| T <sub>STG</sub>   | Storage Temperature Range  | -55  | +150 | °C   |
| T <sub>L</sub>     | Lead Temperature (Wave Soldering or IR, 10 Seconds)                  |      | +260 | °C   |
| ESD                | Electrostatic Discharge Capability, Human Body Model JESD22-A114     |      | 3.5  | kV   |
|                    | Electrostatic Discharge Capability, Charged Device Model JESD22-C101 |      | 1.5  | kV   |
|                    | Electrostatic Discharge Capability, Machine Model, JESD22-A115       |      | 200  | V    |

### Notes:


- All voltage values, except differential voltages, are given with respect to GND pin.
- Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device.

## Electrical Characteristics


Unless otherwise noted,  $V_{DD}=15V$  and  $T_A=25^{\circ}C$ .

| Symbol                        | Parameter   | Conditions                 | Min.            | Typ.             | Max.      | Units      |     |
|-------------------------------|---|----------------------------|-----------------|------------------|-----------|------------|-----|
| <b>V<sub>DD</sub> Section</b> |   |                            |                 |                  |           |            |     |
| $V_{DD-OP}$                   | Continuously Operation Voltage                        |                            |                 |                  | 22        | V          |     |
| $V_{DD-ON}$                   | Turn-on Threshold Voltage                             |                            | 15.5            | 16.5             | 17.5      | V          |     |
| $V_{DD-OFF}$                  | Turn-off Threshold Voltage                            |                            | 8.5             | 9.5              | 10.5      | V          |     |
| $I_{DD-ST}$                   | Startup Current                                       | $V_{DD}=V_{DD-ON} - 0.1V$  |                 | 9                | 15        | $\mu A$    |     |
| $I_{DD-OP}$                   | Operating Supply Current                              | $V_{DD}=15V, C_L=1nF$      |                 | 3.0              | 3.5       | mA         |     |
| $V_{DD-OVP}$                  | $V_{DD}$ Over-Voltage Protection Level                | Auto Restart               | 24              | 25               | 26        | V          |     |
| $t_{D-VDDOVP}$                | $V_{DD}$ Over-Voltage Protection Debounce             | Auto Restart               |                 | 125              |           | $\mu s$    |     |
| $V_{DD-G OFF}$                | $V_{DD}$ Low-Threshold Voltage to Exit Green-off Mode |                            |                 | $V_{DD-OFF} + 1$ |           | V          |     |
| <b>Feedback Input Section</b> |   |                            |                 |                  |           |            |     |
| $Z_{FB}$                      | Input Impedance                                       |                            |                 | 5                |           | k $\Omega$ |     |
| $V_{FB-OPEN}$                 | FB Output High Voltage                                |                            | 5               |                  |           | V          |     |
| $V_{FB-OL}$                   | FB Open-loop Trigger Level                            |                            | 4.3             | 4.6              | 4.9       | V          |     |
| $t_{D-OLP}$                   | Delay of FB Pin Open-loop Protection                  |                            |                 | 56               |           | ms         |     |
| $V_{FB-N}$                    | Green-Mode Entry FB Voltage                           |                            | 2.60            | 2.85             | 3.10      | V          |     |
| $V_{FB-G}$                    | Green-Mode Ending FB Voltage                          |                            |                 | 2.2              |           | V          |     |
| $S_G$                         | Green-Mode Modulation Slope                           | $R_I=95k\Omega$            | 40              | 75               | 100       | Hz/mV      |     |
| <b>Current-Sense Section</b>  |   |                            |                 |                  |           |            |     |
| $Z_{SENSE}$                   | Input Impedance                                       |                            | 10              |                  |           | k $\Omega$ |     |
| $t_{PD}$                      | Delay to Output                                       |                            | 40              | 55               | 100       | ns         |     |
| $V_{STHFL}$                   | Flat Threshold Voltage for Current Limit              |                            |                 | 1                |           | V          |     |
| $V_{STHVA}$                   | Valley Threshold Voltage for Current Limit            |                            | 0.75            | 0.80             | 0.85      | V          |     |
| $t_{LEB}$                     | Leading-Edge Blanking Time                            |                            | 270             | 320              | 370       | ns         |     |
| $DCY_{SAW}$                   | Duty Cycle of SAW Limit                               |                            |                 | 40               |           | %          |     |
| <b>Oscillator Section</b>     |   |                            |                 |                  |           |            |     |
| $f_{OSC}$                     | Frequency   | Center Frequency           | $R_I=95k\Omega$ | 65               | 70        | 75         | kHz |
|                               |   | Hopping Range              |                 |                  | $\pm 4.9$ |            |     |
| $T_{HOP}$                     | Hopping Period  | $R_I=95k\Omega$            |                 | 3.7              |           | ms         |     |
| $f_{OSC-G}$                   | Green-Mode Frequency                                  | $R_I=95k\Omega$            |                 | 20               |           | kHz        |     |
| $f_{DV}$                      | Frequency Variation vs. $V_{DD}$ Deviation            | $V_{DD}=13.5$ to $22V$     | 0               | 0.02             | 2.00      | %          |     |
| $f_{DT}$                      | Frequency Variation vs. Temperature Deviation         | $T_A=-20$ to $85^{\circ}C$ |                 |                  | 2         | %          |     |
| <b>Output Section</b>         |   |                            |                 |                  |           |            |     |
| $DCY_{MAX}$                   | Maximum Duty Cycle                                    |                            | 62              | 67               | 72        | %          |     |
| $V_{GATE-L}$                  | Output Voltage Low                                    | $V_{DD}=15V, I_O=20mA$     |                 |                  | 1.4       | V          |     |
| $V_{GATE-H}$                  | Output Voltage High                                   | $V_{DD}=13.5V, I_O=20mA$   | 8               |                  |           | V          |     |
| $t_r$                         | Rising Time   | $V_{DD}=15V, C_L=1nF$      |                 | 150              |           | ns         |     |
| $t_f$                         | Falling Time  | $V_{DD}=15V, C_L=1nF$      |                 | 55               |           | ns         |     |
| $V_{GATE-CLAMP}$              | Output Clamp Voltage                                  | $V_{DD}=22V$               | 16              | 17               | 18        | V          |     |


## Typical Performance Characteristics

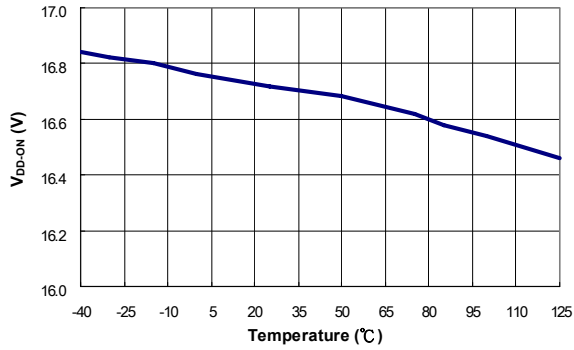


**Figure 6. Turn-on Threshold Voltage (V<sub>DD-ON</sub>) vs. Temperature**

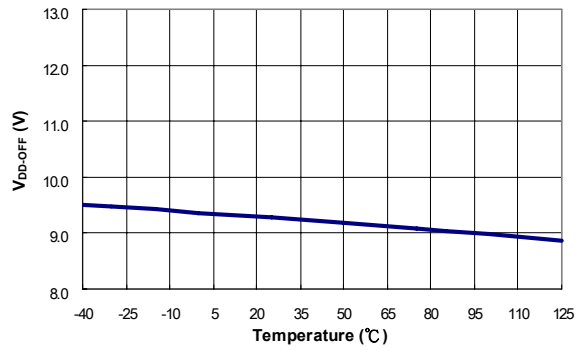


**Figure 7. Turn-off Threshold Voltage (V<sub>DD-OFF</sub>) vs. Temperature**

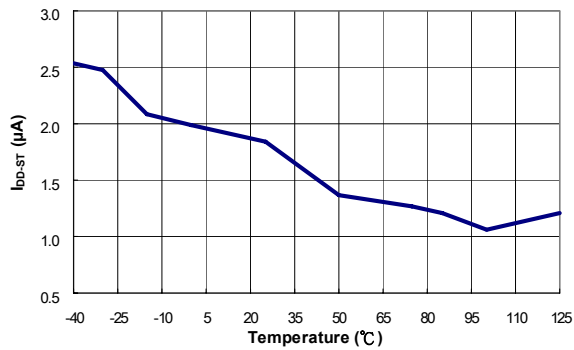


**Figure 8. Startup Current (I<sub>DD-ST</sub>) vs. Temperature**

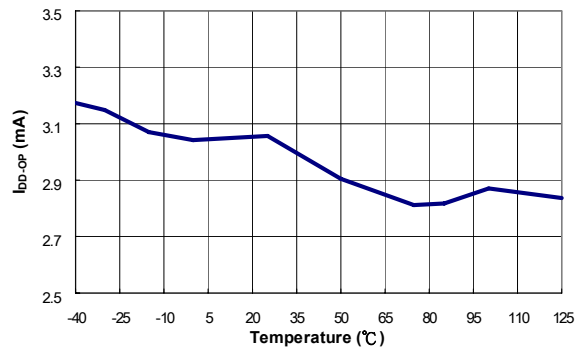

**Figure 9. Operating Supply Current (I<sub>DD-OP</sub>) vs. Temperature**

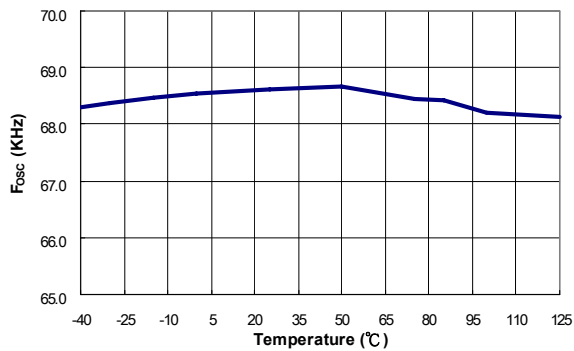


**Figure 10. Center Frequency (f<sub>OSC</sub>) vs. Temperature**

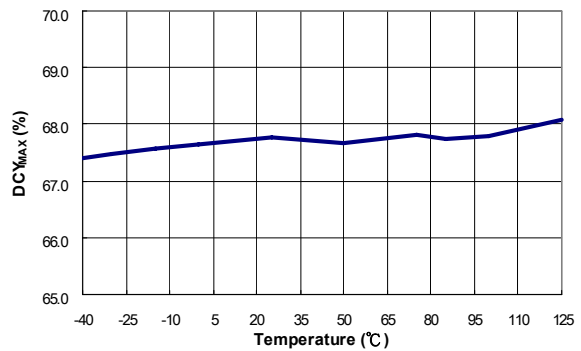


**Figure 11. Maximum Duty Cycle (DCY<sub>MAX</sub>) vs. Temperature**


## Typical Performance Characteristics

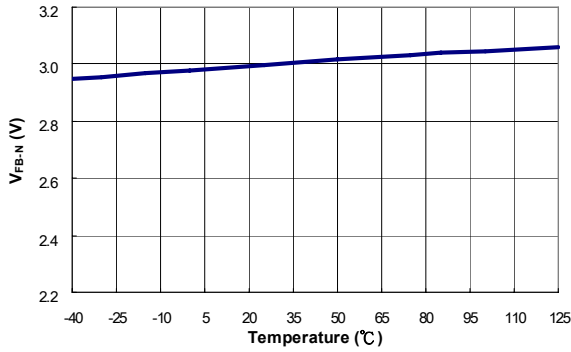


**Figure 12. Green-Mode Entry FB Voltage (V<sub>FB-N</sub>) vs. Temperature**

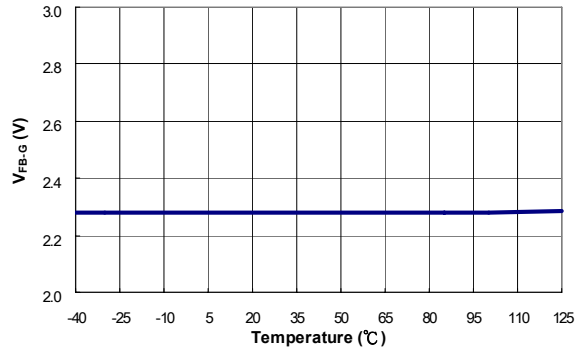

**Figure 13. Green-Mode Ending FB Voltage (V<sub>FB-G</sub>) vs. Temperature**

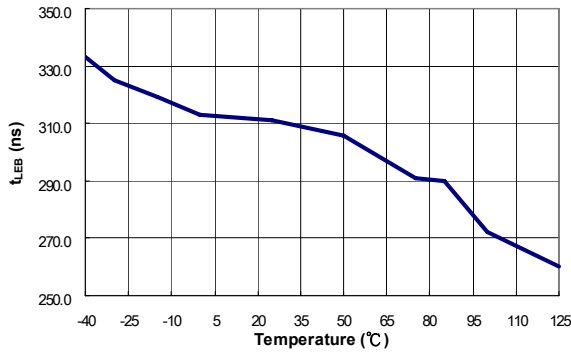

**Figure 14. Leading-Edge Blanking Time (t<sub>LEB</sub>) vs. Temperature**

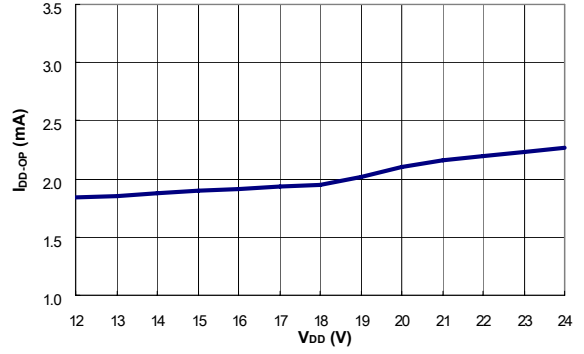

**Figure 15. Operating Supply Current vs. V<sub>DD</sub> Voltage**



## Operation Description

SG6859A devices integrate many useful designs into one controller for low-power, switch-mode power supplies. The following descriptions highlight some of the features of the SG6859A series.

### Startup Current

The startup current is only 9 $\mu$ A. Low startup current allows a startup resistor with high resistance and low-wattage to supply the startup power for the controller. A 1.5M $\Omega$ , 0.25W, startup resistor and a 10 $\mu$ F/25V  $V_{DD}$  hold-up capacitor are sufficient for an AC-to-DC power adapter with a wide input range (100V<sub>AC</sub> to 240V<sub>AC</sub>).

### Operating Current

The operating current has been reduced to 3mA. The low operating current results in higher efficiency and reduces the  $V_{DD}$  hold-up capacitance requirement.

### Green-Mode Operation

The proprietary green-mode function provides off-time modulation to linearly decrease the switching frequency under light-load conditions. On-time is limited to provide stronger protection against brownouts and other abnormal conditions. The feedback current, which is sampled from the voltage feedback loop, is taken as the reference. Once the feedback current exceeds the threshold current, the switching frequency starts to decrease. This green-mode function dramatically reduces power consumption under light-load and zero-load conditions. Power supplies using the SG6859A can meet even the strictest regulations regarding standby power consumption.

### Oscillator Operation

A resistor connected from the RI pin to ground generates a constant current source used to charge an internal capacitor. The charge time determines the internal clock speed and the switching frequency. Increasing the resistance reduces the amplitude of the input current and the switching frequency. A 95k $\Omega$   $R_i$  resistor results in a 50 $\mu$ A constant current,  $I_i$ , and a 70kHz switching frequency. The relationship between  $R_i$  and the switching frequency is:

$$f_{\text{PWM}} = \frac{6650}{R_i(\text{k}\Omega)} \text{ (kHz)} \quad (1)$$

### Leading-Edge Blanking

Each time the power MOSFET is switched on, a turn-on spike occurs at the sense-resistor. To avoid premature termination of the switching pulse, a 320ns leading-edge blanking time is built in. Conventional RC filtering can be omitted. During this blanking period, the current-limit comparator is disabled and cannot switch off the gate driver.

### Constant Output Power Limit

When the SENSE voltage across the sense resistor,  $R_s$ , reaches the threshold voltage (around 1V), the

output GATE drive is turned off following a short propagation delay,  $t_{\text{PD}}$ . This propagation delay introduces an additional current proportional to  $t_{\text{PD}} \cdot V_{\text{IN}} / L_P$ . The propagation delay is nearly constant, regardless of the input line voltage  $V_{\text{IN}}$ . Higher input line voltages result in larger additional currents. At high input line voltages, the output power limit is higher than at low input line voltages. To compensate for this output power limit variation across a wide AC input range, the threshold voltage is adjusted by adding a positive ramp. This ramp signal rises from 0.8V to 1V, then flattens out at 1V. A smaller threshold voltage forces the output GATE drive to terminate earlier, which reduces the total PWM turn-on time and makes the output power equal to that of low line input. This proprietary internal compensation ensures a constant output power limit for a wide AC input voltage range (90V<sub>AC</sub> to 264V<sub>AC</sub>).

### Under-Voltage Lockout (UVLO)

The turn-on and turn-off thresholds are fixed internally at 16.5V and 9.5V. During startup, the hold-up capacitor must be charged to 16.5V through the startup resistor to enable the SG6859A. The hold-up capacitor continues to supply  $V_{DD}$  until power can be delivered from the auxiliary winding of the main transformer.  $V_{DD}$  must not drop below 9.5V during this startup process. This UVLO hysteresis window ensures that hold-up capacitor is adequate to supply  $V_{DD}$  during startup.

### Gate Output

The BiCMOS output stage is a fast totem pole gate driver. Cross conduction has been avoided to minimize heat dissipation, increase efficiency, and enhance reliability. The output driver is clamped by an internal 17V Zener diode to protect power MOSFET transistors against undesired over-voltage gate signals.

### Built-in Slope Compensation

The sensed voltage across the current-sense resistor is used for current-mode control and pulse-by-pulse current limiting. Built-in slope compensation improves stability and prevents sub-harmonic oscillations due to peak-current mode control. The SG6859A has a synchronized, positively-sloped ramp built-in at each switching cycle. The slope of the ramp is:

$$\frac{0.36 \times \text{Duty}}{\text{Duty}(\text{max.})} \quad (2)$$

### Noise Immunity

Noise from the current sense or the control signal can cause significant pulse-width jitter, particularly in continuous-conduction mode (CCM). While slope compensation helps alleviate these problems, further precautions should still be taken. Good placement and layout practices should be followed. Avoiding long PCB traces and component leads, locating compensation and filter components near the SG6859A, and increasing power MOS gate resistance improve performance.

## Applications Information


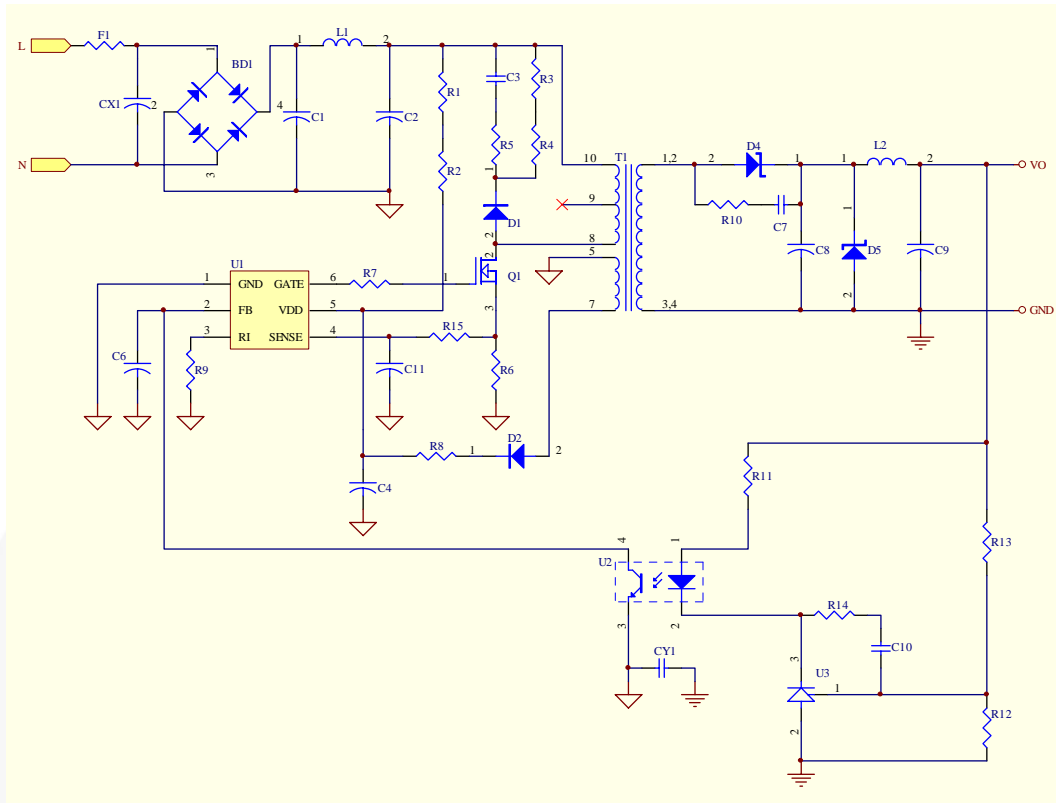


Figure 16. Reference Circuit

## Bill of Materials (BOM)

| Reference      | Component                           | Reference      | Component            |
|----------------|-------------------------------------|----------------|----------------------|
| BD1            | BD 1A/500V                          | L2             | 10 $\mu$ H 6mm       |
| CX1 (Optional) | XC 0.1 $\mu$ F                      | Q1             | MOSFET 1A/600V       |
| CY1 (Optional) | YC 1nF/400V (Y1)                    | R1,R2          | R 750K $\Omega$ 1206 |
| C1             | CC 10nF/500V                        | R3,R4          | R 47K $\Omega$ 1206  |
| C2             | EC 10 $\mu$ F/400V 105 $^{\circ}$ C | R5             | R 47 $\Omega$ 1206   |
| C3             | CC 1nF/500V                         | R6             | R 4.7 $\Omega$ 1206  |
| C4             | EC 10 $\mu$ F/50V                   | R7             | R 100 $\Omega$ 0805  |
| C6             | CC 4.7nF 0805                       | R8             | R 10 $\Omega$ 1206   |
| C7 (Optional)  | CC 1nF/100V 1206                    | R9             | R 100K $\Omega$ 0805 |
| C8             | EC 470 $\mu$ F/10V 105 $^{\circ}$ C | R10 (Optional) | R 10 $\Omega$ 1206   |
| C9             | EC 220 $\mu$ F/10V 105 $^{\circ}$ C | R11            | R 100 $\Omega$ 1/8W  |
| C10            | CC 2.2nF 0805                       | R12            | R 33K $\Omega$ 0805  |
| C11            | N.C.                                | R13            | R 33K $\Omega$ 1/8W  |
| D1             | Diode FRI07                         | R14            | R 4.7K $\Omega$ 0805 |
| D2             | Diode FR102                         | R15            | R 0 $\Omega$ 0805    |
| D4             | Diode SB360                         | T1             | EE-16                |
| D5 (Optional)  | ZD 6.8V 0.5W                        | U1             | IC SG6859A           |
| F1             | R 1 $\Omega$ /0.5W                  | U2             | PC817                |
| L1             | 20mH 6 $\cdot$ 8mm                  | U3             | TL431                |

## Physical Dimensions

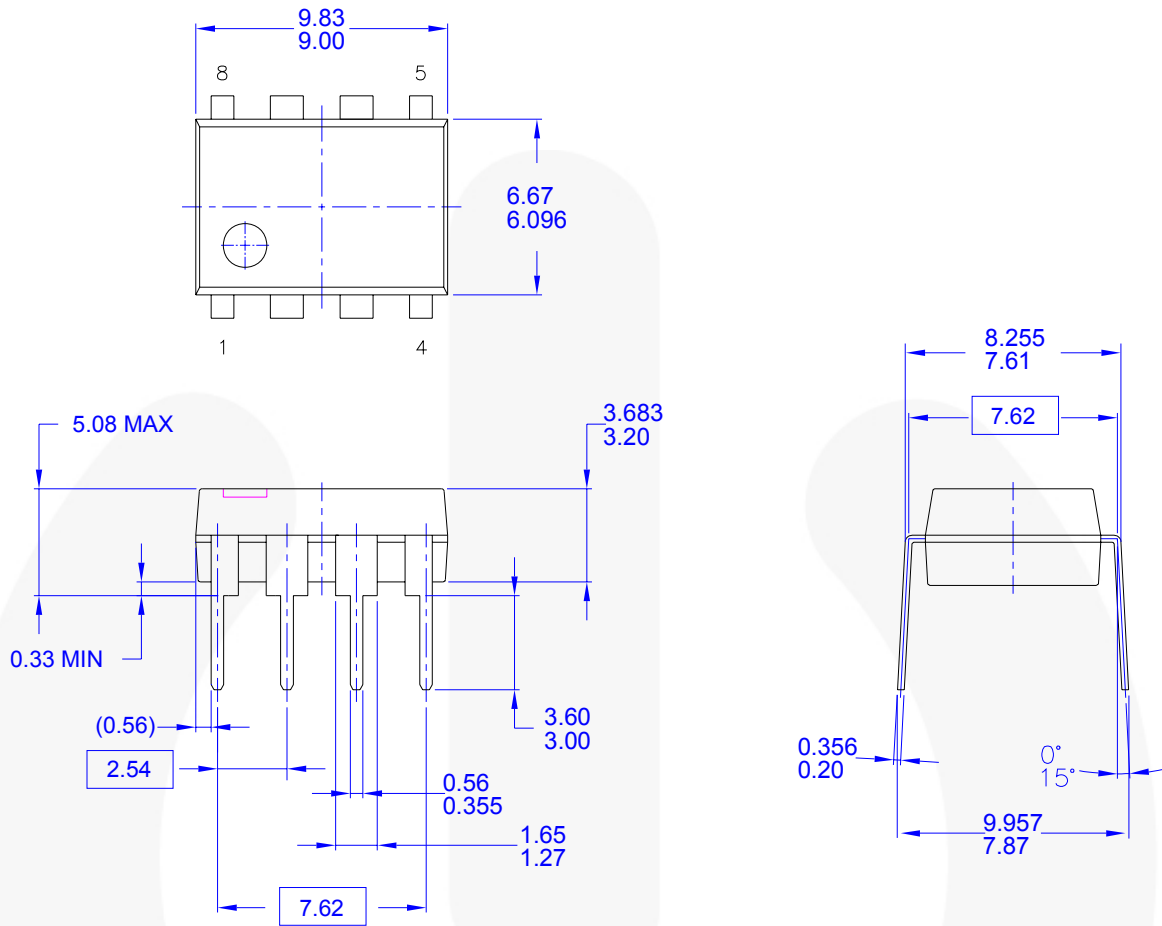

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) THIS PACKAGE CONFORMS TO JEDEC MS-001 VARIATION BA
  - B) ALL DIMENSIONS ARE IN MILLIMETERS.
  - C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
  - D) DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994
  - E) DRAWING FILENAME AND REVISION: MKT-N08FREV2.

Figure 17. 8-Pin, Dual Inline Package (DIP)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>.

Physical Dimensions (Continued)

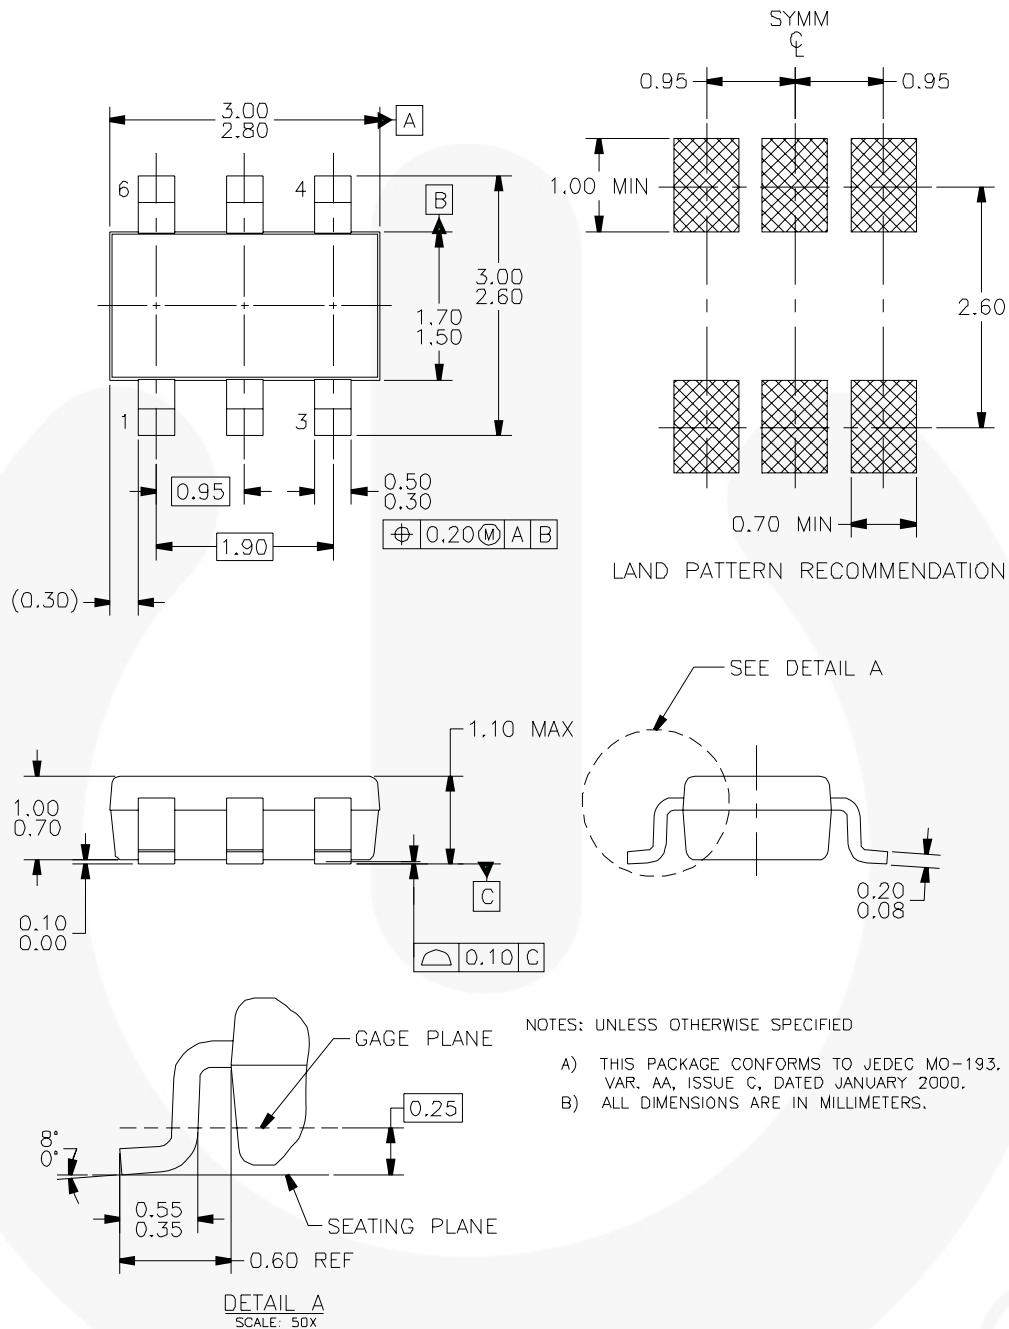


Figure 18. 6-Pin, SSOT-6 Package





Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>.



**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- |                          |   |  |   |
|--------------------------|---|--|---|
| AccuPower™               | FRFET®  | PowerTrench®   | The Power Franchise®  |
| Auto-SPM™                | Global Power Resource™  | PowerXS™   | <b>the power franchise</b>  |
| Build it Now™            | Green FPS™  | Programmable Active Droop™   | TinyBoost™  |
| CorePLUS™                | Green FPS™ e-Series™  | QFET®  | TinyBuck™   |
| CorePOWER™               | Gmax™   | QS™  | TinyCalc™   |
| CROSSVOLT™               | GTO™  | Quiet Series™  | TinyLogic®  |
| CTL™                     | IntelliMAX™   | RapidConfigure™  | TINYOPTO™   |
| Current Transfer Logic™  | ISOPLANAR™  |  ™                | TinyPower™  |
| DEUXPEED®                | MegaBuck™   | Saving our world, 1mW/WkW at a time™   | TinyPWM™  |
| Dual Cool™               | MICROCOUPLER™   | SignalWise™  | TinyWire™   |
| EcoSPARK™                | MicroFET™   | SmartMax™  | TriFault Detect™  |
| EfficientMax™            | MicroPak™   | SMART START™   | TRUECURRENT™*   |
| <b>F</b> ®               | MicroPak2™  | SPM®   | µSerDes™  |
| Fairchild®               | MillerDrive™  | STEALTH™   |  SerDes® |
| Fairchild Semiconductor® | MotionMax™  | SuperFET™  | UHC®  |
| FACT Quiet Series™       | Motion-SPM™   | SuperSOT™.3  | Ultra FRFET™  |
| FACT®                    | OptoHIT™  | SuperSOT™.6  | UniFET™   |
| FAST®                    | OPTOLOGIC®  | SuperSOT™.8  | VCX™  |
| FastvCore™               | OPTOPLANAR®   | SupreMOS™  | VisualMax™  |
| FETBench™                |  ® | SyncFET™   | XST™  |
| FlashWriter®             | PDP SPM™  | Sync-Lock™   |   |
| FPS™                     | Power-SPM™  |  SYSTEM®+ GENERAL |   |
| F-PFS™                   |   |  |   |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS**

**Definition of Terms**

| Datasheet Identification | Product Status        | Definition  |
|--------------------------|-----------------------|---|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.   |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.  |

Rev. I47