

# FM809

## Precision Reset Generator Circuit

### General Description


The FM809 features comprehensive reset generation for microcontroller/microprocessor based systems. If the system  $V_{CC}$  voltage level is determined to be in an out-of-tolerance state, the device automatically generates a low-going reset signal. The reset signal is held in the active state (low) for a specified duration (minimum 140 ms) after the  $V_{CC}$  returns to an in-tolerance state.

The FM809 is fabricated using CMOS technology. The FM809 is available in the SOT-23 package.


### Features

- Automatic reset generation on power-up
- Minimum 140 ms reset pulse — compatible with other similar 809 class devices
- Other reset pulse choices available: 32 - 256 ms
- Choice of commercial and extended temperature ranges
- Choice of Reset Thresholds: 4.63V, 4.38V, 4.00V, 3.08V, 2.93V, 2.63V
- Package available: SOT-23

### Block Diagram

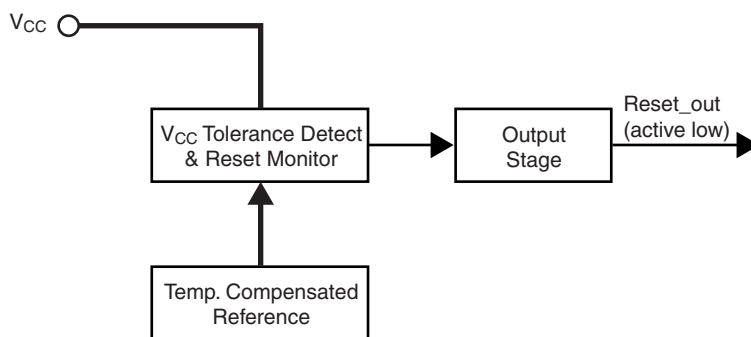

### Connection Diagram

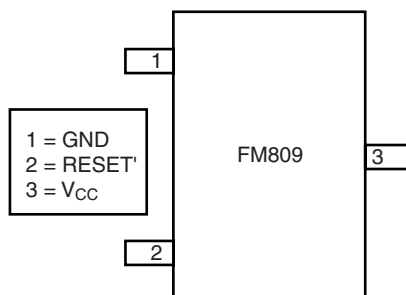

Each FM809 device has the following Identifier (FM809yz) (Top Mark on devices will be 09yz)

#### Reset Characteristics

RESET THRESHOLD (V)	Identifier(y)	Fairchild Part Number
4.63	L	FM809Lz
4.38	M	FM809Mz
4.00	J	FM809Jz
3.08	T	FM809Tz
2.93	S	FM809Sz
2.63	R	FM809Rz

RESET PULSE DURATION (mS)	Identifier(z)	Fairchild Part Number
32	E	FM809yE*
64	F	FM809yF*
128	H	FM809yH*
256	Blank	FM809y

**Note\*:** These choices are available upon special request only. Please work with Fairchild Marketing to determine availability.

## Product Specifications

### Absolute Maximum Ratings

Ambient Storage Temperature	-65°C to +150°C
All Input or Output Voltages with Respect to Ground	-0.3V to 6.5V
Lead Temperature (Soldering, 10 seconds)	+300°C
ESD Rating	2000V min.

### Operating Conditions

Ambient Operating Temperature	
Commercial	0°C to +70°C
Industrial	-40°C to +85°C

### Electrical Characteristics

Parameter	Symbol	Temp	Conditions	Min	Typ	Max	Units
V <sub>CC</sub> Range		Com		1.0		5.5V	V
	I <sub>ND</sub>			1.2		5.5	V
Supply Current	I <sub>CC</sub>	Com				50	μA
						100	μA
Reset Threshold	V <sub>TH</sub>	Com	'L' Identifier	4.50	4.63	4.75	V
		Ind		4.40	4.63	4.85	V
		Com	'M' Identifier	4.25	4.38	4.50	V
		Ind		4.16	4.38	4.56	V
		Com	'J' Identifier	3.89	4.00	4.10	V
		Ind		3.80	4.00	4.20	V
		Com	'T' Identifier	3.00	3.08	3.15	V
		Ind		2.92	3.08	3.23	V
		Com	'S' Identifier	2.85	2.93	3.00	V
		Ind		2.78	2.93	3.08	V
		Com	'R' Identifier	2.55	2.63	2.70	V
		Ind		2.50	2.63	2.75	V
nRESET Output Voltage High	V <sub>OH</sub>	All	I <sub>source</sub> = 150 mA	0.8V <sub>CC</sub>			V
nRESET Output Voltage Low	V <sub>OL</sub>	All	I <sub>sink</sub> = 1.2mA	0.4			V
Reset Timeout Period	T <sub>RST</sub>	All		175	240	375	ms

**Note:** Production testing done at TA = +25°C, over temperature limits guaranteed by design only.

## General Description

The FM809 features a highly accurate voltage reference against which the V<sub>CC</sub> is compared. Once the V<sub>CC</sub> is below the specified threshold, it will drive the RESET line and continue to hold it low until the V<sub>CC</sub> returns above the threshold and the time for the RESET pulse duration has expired. The FM809 is immune to short negative going transients on the V<sub>CC</sub> line. The placement of a 0.1μF bypass capacitor as close as possible to the V<sub>CC</sub> pin provides additional transient immunity.

For a V<sub>CC</sub> value below 1.0V-1.3V, the FM809 does not sink current on the RESET pin.


This is not a problem in most systems since most common devices are not functional in this range. If it is desired for the FM809 reset to be functional below the range above, it is suggested to use a 100KΩ pull-down resistor between RESET and V<sub>SS</sub>.

### Interfacing to Bidirectional reset pins


FM809 can be used with microprocessors with bidirectional reset pins. In order to allow the microprocessor to drive the reset line, the output of the FM809 must be connected to the microprocessor through a 4.7kΩ resistor. This will ensure that the RESET line has correct level at both the FM809 as well as the device end.

## Typical Operating Characteristics


### Supply Current Vs. Temperature (FM809R/S/T)

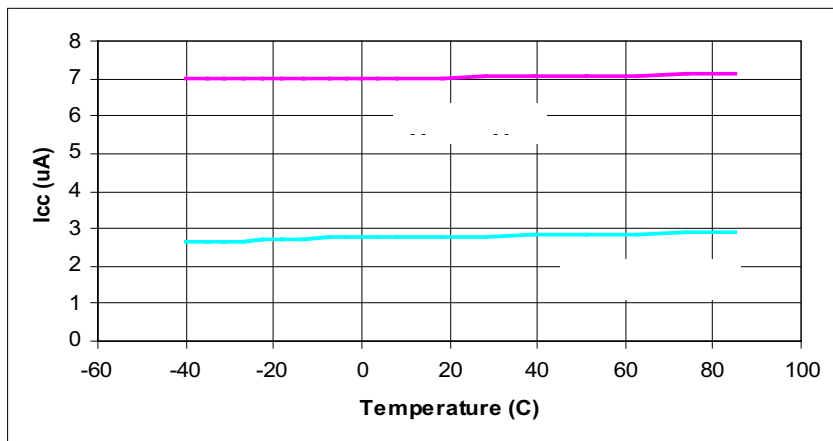


### Power up Reset Timeout Vs. Temperature FM809(R/S/T)

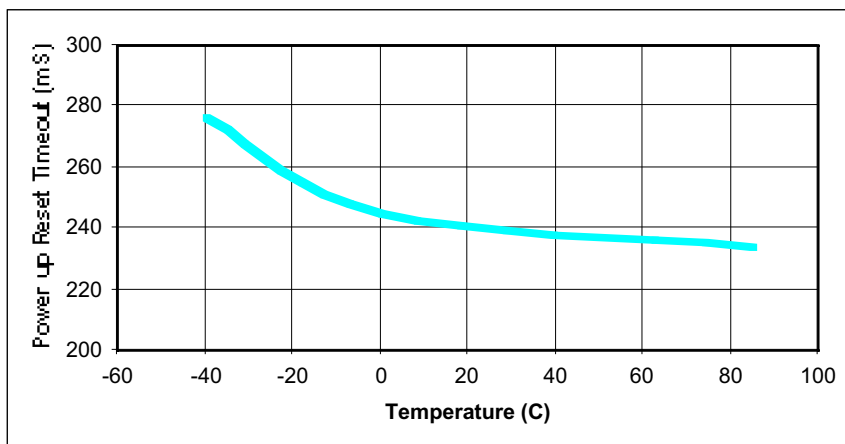

### Normalized Reset Threshold Vs. Temperature FM809(R/S/T)

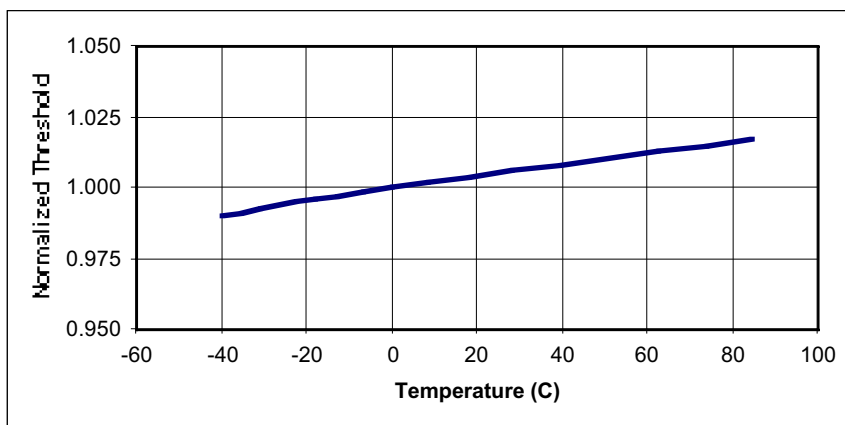

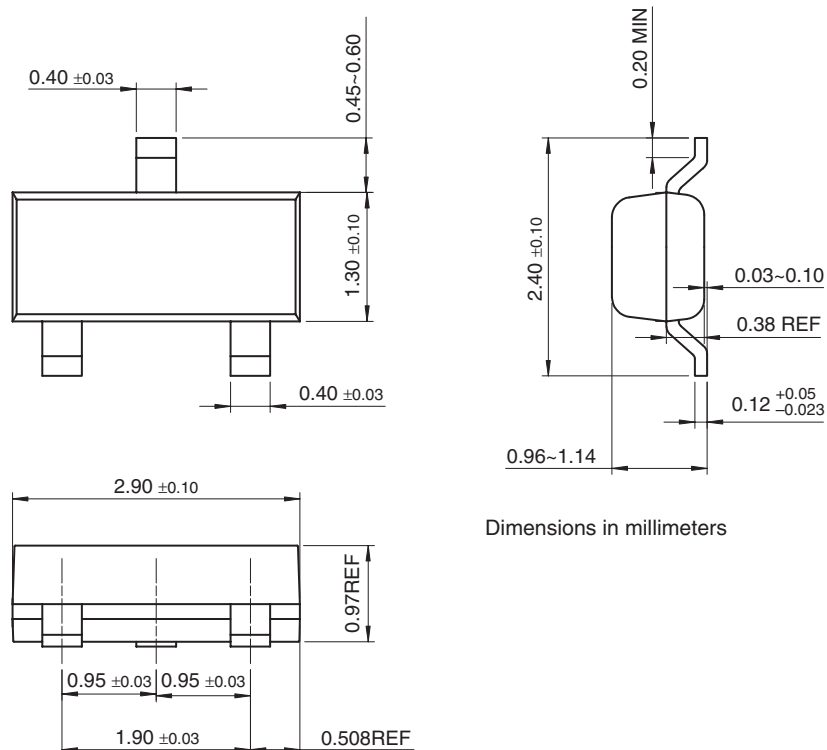**Physical Dimensions** inches (millimeters) unless otherwise noted

**SOT-23 Package Dimensions**  
**FS Pkg Code AU**

**Life Support Policy**

Fairchild's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of Fairchild Semiconductor Corporation. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor  
Americas  
Customer Response Center  
Tel: 1-888-522-5372

Fairchild Semiconductor  
Europe  
Deutsch Fax: +44 (0) 1793-856858  
Tel: +49 (0) 8141-6102-0  
English Tel: +44 (0) 1793-856856  
Français Tel: +33 (0) 1-6930-3696  
Italiano Tel: +39 (0) 2-249111-1

Fairchild Semiconductor  
Hong Kong  
8/F, Room 808, Empire Centre  
68 Mody Road, Tsimshatsui East  
Kowloon, Hong Kong  
Tel: +852-2722-8338  
Fax: +852-2722-8383

Fairchild Semiconductor  
Japan Ltd.  
4F, Natsume Bldg.  
2-18-6, Yushima, Bunkyo-ku  
Tokyo, 113-0034 Japan  
Tel: 81-3-3818-8840  
Fax: 81-3-3818-8841

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.