









Schottky Barrier Diodes (Surface Mount) 40V

Parameter Type No.	Absolute Maximum Ratings				Electrical Characteristics ($T_a = 25^\circ\text{C}$)							Others	
	V_{RM} (V)	$I_F(\text{AV})$ (A)	$I_{F\text{SM}}$ (A) 50Hz Half-cycle Sinewave Single Shot	T_j ($^\circ\text{C}$)	T_{stg} ($^\circ\text{C}$)	max	I_F (A)	$V_R = V_{RM}$ max	$V_R = V_{RM}$ $T_a = 100^\circ\text{C}$ max	t_{rr} (ns)	$R_{th}(j-l)$	Mass (g)	Fig.
SSB-14	40	0.5	4	-40 to +150		0.58	0.5	0.1	5	50	100/100	150.0	A
SFPB-54		1.0	30			0.55	1.0	1.0					
SFPB-64		1.5	60						50			20.0	B
SFPB-74		2.0				0.50	2.0	5.0					
SFPE-64		2.0	40			0.60	2.0	0.2	20 ($T_j = 150^\circ\text{C}$)	—	—		





SSB-14



SFPB-54





SFPB-64







External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

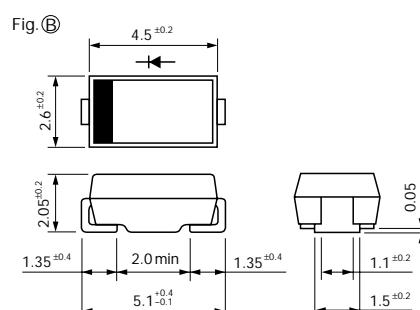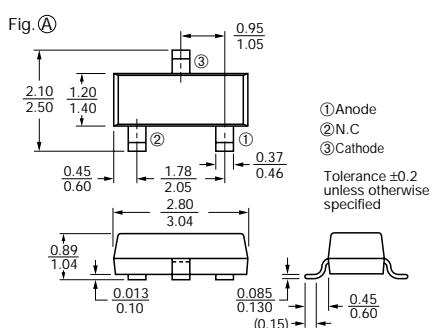

SFPB-74**SFPE-64**