


# Fast-Acting Ferrule Fuses

## 13/32" x 1-1/2" Midget

## 2/10-30 Amps



### Dimensional Data

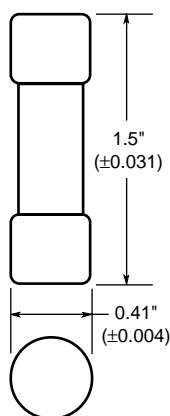

CATALOG SYMBOL: BAF (5AG)  
 FAST-ACTING  
 2/10 TO 30 AMPERES  
 U.L. RECOGNIZED, STD. 248-14  
 0-15/250V AC  
 (GUIDE # JDYX, FILE # E19180)  
 CSA CERTIFIED  
 0-15/250V AC  
 (CLASS 1422-01, FILE # 53787)

- Fibre tube.
- Nickel plated brass endcaps.

### Electrical Ratings (Catalog Symbol and Amperes)


250 Volts AC IR*	250 Volts AC IR*	250 Volts AC IR*	125 Volts AC
BAF-2/10	BAF-1-1/2	BAF-6-1/4	BAF-20
BAF-1/4	BAF-1-8/10 IR	BAF-7 IR	BAF-25 IR
BAF-1/2 IR	BAF-2 100A	BAF-8 200A	BAF-30 10,000A
BAF-6/10 35A	BAF-2-1/2	BAF-9	—
BAF-8/10	BAF-3	BAF-10	—
BAF-1	BAF-4	BAF-12 IR	—
—	BAF-5 IR	BAF-15 750A	—
—	BAF-6 200A	—	—

\*All have interrupting rating of 10,000A at 125V.  
 DC ratings: 3-6A, 150VDC; 6-1/4-15A, 12VDC; 10 KAIC.

### Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight Lbs.	Kg.
2/10-30	100	1.3	0.590

### Time-Current Characteristic Curves—Average Melt

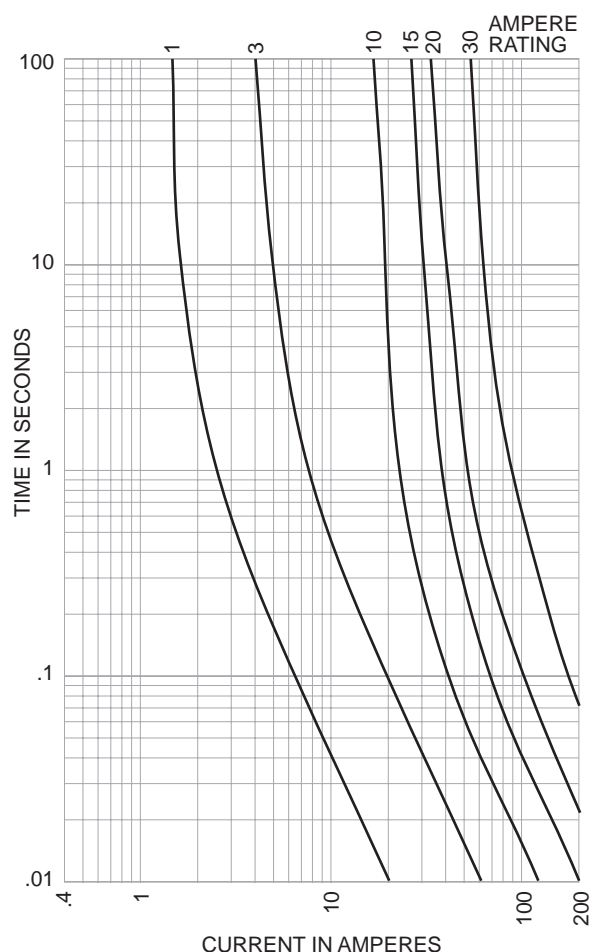

### Recommended Bussmann Fuseblocks Catalog Numbers

Poles	Terminal Type		
	Screw With Quick Connect	Pressure Plate w/Quick Connect	Box Lug
1	BM6031SQ	BM6031PQ	BM6031B
2	BM6032SQ	BM6032PQ	BM6032B
3	BM6033SQ	BM6033PQ	BM6033B

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.