

# COS/MOS INTEGRATED CIRCUIT

M 1024

NOT FOR NEW DESIGN

## 30-CHANNEL REMOTE CONTROL TRANSMITTER

- LOW POWER DISSIPATION IN TRANSMISSION
- QUASI-ZERO STAND-BY CURRENT
- WIDE SUPPLY VOLTAGE RANGE
- INPUTS FULLY PROTECTED
- HIGH NOISE IMMUNITY
- INTERLOCK PREVENTS INCORRECT SELECTION

The M 1024 is a monolithic integrated circuit intended for remote controlled systems in which 30 different ultrasonic frequencies are used to transmit 30 commands.

The M 1024 comprises an oscillator circuit, a variable and a fixed frequency divider, a decoder and a command error protection. The circuit is produced in COS/MOS technology. In conjunction with the ultrasonic Receiver M 1025 a complete remote control system can be realized. The device is available in a 16-lead dual in-line plastic package.

### ABSOLUTE MAXIMUM RATINGS\*

$V_{DD}^{**}$	Supply voltage	0.5 to 12	V
$V_I$	Input voltage	-0.5 to $V_{DD} + 0.5$	V
$ I_O $	Output current	10	mA
$P_{tot}$	Total power dissipation	200	mW
$T_{stg}$	Storage temperature	-65 to 150	°C
$T_{op}$	Operating temperature	-25 to 70	°C


\* Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

\*\* All voltages value are referred to  $V_{SS}$  pin voltage.

ORDERING NUMBER: M 1024 B5

### MECHANICAL DATA


Dimensions in mm

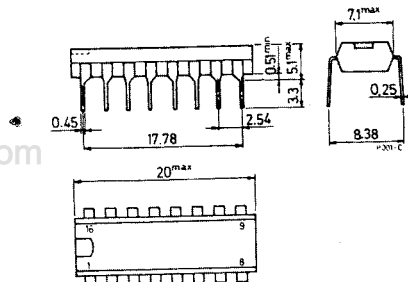


www.DataSheet4U.com

# M 1024

## PIN CONNECTIONS

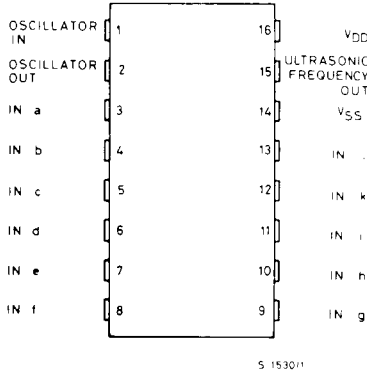

## BLOCK DIAGRAM

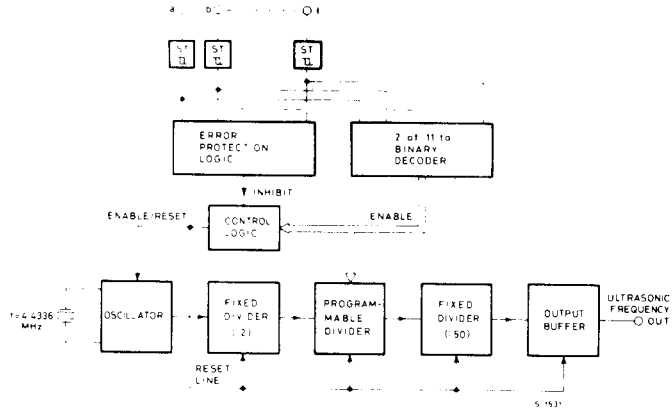

TRUTH TABLE ( $f_i = 4.4336 \text{ MHz}$ )

Channel Number	Inputs											Output Frequency
	a	b	c	d	e	f	g	h	i	k	l	
1	H	H	H	H	L	H	H	L	H	H	H	33 945 Hz
2	H	H	H	H	L	H	H	H	H	H	L	34 291 Hz
3	H	H	H	H	L	H	L	H	H	H	H	34 638 Hz
4	H	H	H	H	L	H	H	H	H	L	H	34 984 Hz
5	H	H	H	H	L	L	H	H	H	H	H	35 330 Hz
6	H	H	H	H	L	H	H	H	L	H	H	35 677 Hz
7	L	H	H	H	H	L	H	H	H	H	H	36 023 Hz
8	L	H	H	H	H	L	H	H	L	H	H	36 370 Hz
9	H	L	H	H	H	L	H	H	H	H	H	36 716 Hz
10	H	L	H	H	H	H	H	H	L	H	H	37 062 Hz
11	H	H	L	H	H	L	H	H	H	H	H	37 409 Hz
12	H	H	L	H	H	H	H	H	L	H	H	37 755 Hz
13	H	H	H	L	H	L	H	H	H	H	H	38 101 Hz
14	H	H	H	L	H	H	H	H	L	H	H	38 448 Hz
15	L	H	H	H	H	H	L	H	H	H	H	38 794 Hz
16	L	H	H	H	H	H	H	H	H	L	H	39 141 Hz
17	H	L	H	H	H	H	L	H	H	H	H	39 487 Hz
18	H	L	H	H	H	H	H	H	H	L	H	39 833 Hz
19	H	H	L	H	H	H	L	H	H	H	H	40 180 Hz
20	H	H	L	H	H	H	H	H	H	L	H	40 526 Hz
21	H	H	H	L	H	H	L	H	H	H	H	40 872 Hz
22	H	H	H	L	H	H	H	H	H	L	H	41 219 Hz
23	L	H	H	H	H	H	H	L	H	H	H	41 565 Hz
24	L	H	H	H	H	H	H	H	H	L	L	41 912 Hz
25	H	L	H	H	H	H	H	L	H	H	H	42 258 Hz
26	H	L	H	H	H	H	H	H	H	L	L	42 604 Hz
27	H	H	L	H	H	H	H	L	H	H	H	42 951 Hz
28	H	H	L	H	H	H	H	H	H	L	L	43 297 Hz
29	H	H	H	L	H	H	H	L	H	H	H	43 643 Hz
30	H	H	H	L	H	H	H	H	H	L	L	43 990 Hz

## DESCRIPTION

The truth table shows the 30 ultrasonic transmission frequencies used in the wireless transmission of remote control commands to the receiver. These frequencies are derived from the frequency of a quartz controlled oscillator with the aid of a variable frequency divider operating on the blanking principle. This is accomplished by blanking out between 1 and 30 out of every 128 pulses of the oscillator frequency (4.4336 MHz). The variable divider is preceded by a flip flop which halves the quartz frequency. The variable divider is followed by a fixed divider which divides by 50. It reduces the jitter, which is unavoidable when using the blanking principle, to negligible values. The expression for the ultrasonic output frequency is

$$f_o = \frac{f_i (97 + N)}{12\,800}$$

wherein N is the channel number and  $f_i = 4.4336$  MHz (sub-carrier frequency). The space between two adjacent ultrasonic frequencies is 346.4 Hz.

The inputs accept a 2 of 11 code: by connecting simultaneously to  $V_{SS}$  one of a to e and one of f to l input, a 5 bit word is generated internally and applied to the variable divider. The relative frequency is thus available at the output.

An error protection circuit prevents incorrect operation. Under these conditions the oscillator will not start to operate, and the frequency divider is held in a defined position.

Since consumption under standby conditions is very low, the ultrasonic transmitter need never be switched off. The selected frequency appears at the output when the threshold voltage is exceeded at the two control inputs. A threshold voltage hysteresis ensures that AC voltages which may be superimposed on the input voltage cannot falsify the actuation.

## RECOMMENDED OPERATING CONDITIONS

$V_{DD}$	Supply voltage	7 to 9	V
$V_I$	Input voltage	0 to $V_{DD}$	V
$f_i$	Oscillator frequency	4.4336	MHz
$T_{op}$	Operating temperature	-25 to 70	°C

## STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)

Parameter	Test conditions	Values at 25°C			Unit
		Min.	Typ.	Max.	
$I_{CCL}$ Quiescent supply current	$V_{DD} = 9V$ all inputs at $V_{DD}$		2	10	$\mu A$
$I_{CC}$ Supply current	$V_{DD} = 9V$ - oscillator running - ultrasonic freq. output open		1.5	3	mA
$I_I$ Input current	$V_{DD} = 9V$ $V_I = 0 : V_{DD}$		0.01	1	$\mu A$
$r_{on}$ High level output resistance (on state)	$V_{DD} = 7V$ $I_{OH} = -1$ mA		0.5	1	k $\Omega$
$r_{on}$ Low level output resistance (on state)	$V_{DD} = 7V$ $I_{OL} = 0.2$ mA		1.5	3	k $\Omega$
$V_{TLH}$ Positive going threshold voltage at the inputs a to l	$V_{DD} = 9V$		4.5		V
$V_{THL}$ Negative going threshold voltage at the inputs a to l	$V_{DD} = 9V$		4.1		V

# M 1024

## TYPICAL APPLICATION

