

**Digital Attenuator, 30 dB, 4-Bit, TTL Driver
DC - 2.5 GHz**

**AT90-1233
V6**

Features

- Attenuation: 2 dB Steps to 30 dB
- Single Positive Supply
- Contains Internal DC to DC Converter
- Small Footprint, JEDEC Package
- Integral TTL Driver
- 50 Ohm Impedance
- Test Boards Available
- Tape and Reel Packaging Available

Description


M/A-COM's AT90-1233 is a GaAs FET 4-Bit digital attenuator with integral driver. Step size is 2 dB providing a 30 dB attenuation range. This device is in an FQFP-N plastic surface mount package. The AT90-1233 is suited for single supply applications where accuracy, fast speed, low power consumption and low costs are required. For dual supply designs without switching noise, use AT90-0233.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	GND	17	NC
2	C16	18	NC
3	C8	19	+Vcc ²
4	C4	20	NC
5	C2	21	Cp ⁴
6	GND	22	NC
7	GND	23	Cp ⁴
8	NC	24	NC
9	NC	25	-Vee ³
10	NC ¹	26	GND
11	GND	27	RF2
12	RF1	28	GND
13	GND	29	NC ¹
14	NC	30	-Vee ^{3,5}
15	NC	31	NC
16	NC	32	+Vcc ^{2,6}

1. Pins 10 and 29 must be isolated.
2. Pin 19 must be connected to Pin 32.
3. Pin 25 must connect to Pin 30.
4. A .01 μ F cap must be connected between Pins 21 and 23.
5. -VEE is produced internally and requires a .1 μ F cap to GND. Generated noise is typical of switching DC-DC Converters.
6. +Vcc requires a .1 μ F cap to GND.

CSP-1

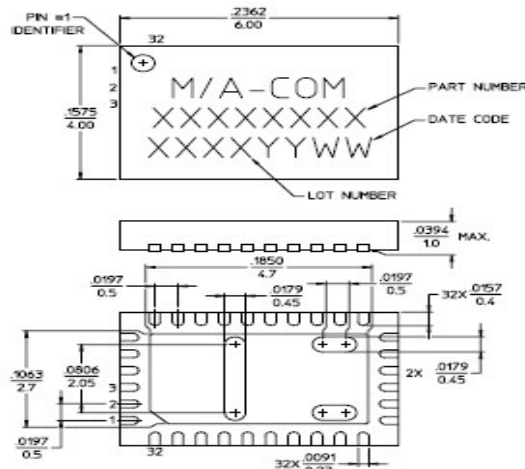

Ordering Information

Part Number	Package
AT90-1233	Bulk Packaging
AT90-1233TR	Tape and Reel (1K Reel)
AT90-1233-TB	Units Mounted on Test Board

Note: Reference Application Note M513 for reel size information.

Truth Table

C16	C6	C4	C2	Attenuation
0	0	0	0	Loss, Reference
0	0	0	1	2.0 dB
0	0	1	0	4.0 dB
0	1	0	0	8.0 dB
1	0	0	0	16.0 dB
1	1	1	1	30.0 dB

0 = TTL Low; 1 = TTL High

**Digital Attenuator, 30 dB, 4-Bit, TTL Driver
DC - 2.5 GHz**

**AT90-1233
V6**

Electrical Specifications: T_A = +25°C

Parameter	Test Conditions	Frequency	Units	Min.	Typ.	Max.
Insertion Loss	—	DC - 2.5 GHz	dB	—	2.7	3.0
Attenuation Accuracy	Individual Bits or Any Combination of Bits	DC - 2.5 GHz	dB	—	—	±(.3 +5% of atten setting)
VSWR	Full Range	DC - 2.5 GHz	Ratio	—	1.5:1	1.8:1
Switching Speed	50% Cntl to 90%/10% RF 10% to 90% or 90% to 10%	— —	nS nS	— —	75 20	150 50
1 dB Compression	— —	50 MHz 0.5 - 2.5 GHz	dBm dBm	— —	+21 +29	— —
Input IP3	Two-tone inputs up to +5 dBm	50 MHz 0.5 - 2.5 GHz	dB dB	— —	+35 +48	— —
+Vcc	—	—	V	4.75	5.0	5.25
Logic "0"	Sink Current is 20 µA max.	—	V	0.0	—	0.8
Logic "1"	Source Current is 20 µA max.	—	V	2.0	—	5.0
I _{cc} ¹	V _{cc} min to max, Logic "0" or "1"	—	mA	—	6	10
Turn-on Current ²	For guaranteed start-up	—	mA	—	—	125
Switching Noise	Generated from DC-DC Converter with recommended capacitors	3.5 MHz	dBm	—	-93	—
Thermal Resistance θ _{JA}	—	—	°C/W	—	15	—


1. During turn-on, the device requires an initial start up current (I_{cc}) specified as "Turn-on Current". Once operational, I_{cc} will drop to the specified levels.
2. The DC-DC converter is guaranteed to start in 100 µs as long as the power supplies have the maximum turn-on current available for start-up.

Absolute Maximum Ratings³

Parameter	Absolute Maximum
Max. Input Power 0.05 GHz 0.5 - 2.5 GHz	+27 dBm +34 dBm
Supply Voltages V _{cc} V _{ee}	+5.5V -8.5V
Logic Voltage ⁴	-0.5V to V _{cc} +0.5V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.


Recommended PCB Configuration⁵

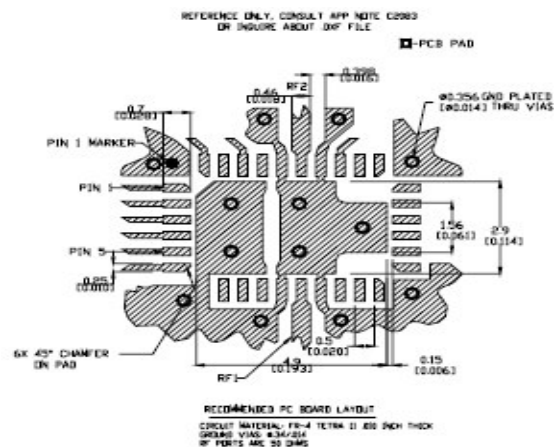


5. Application Note 2083 is available on line at www.macom.com

Typical Performance Curves @ 25°C


Insertion Loss

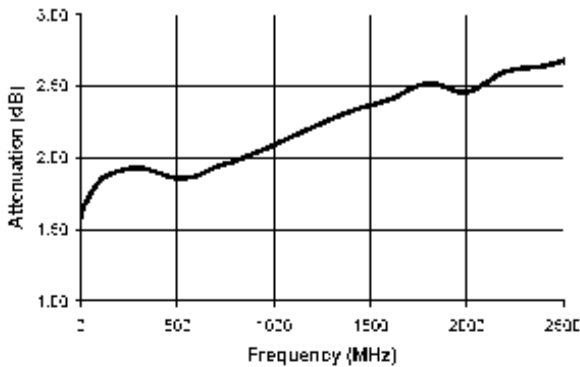


VSWR @ Insertion Loss

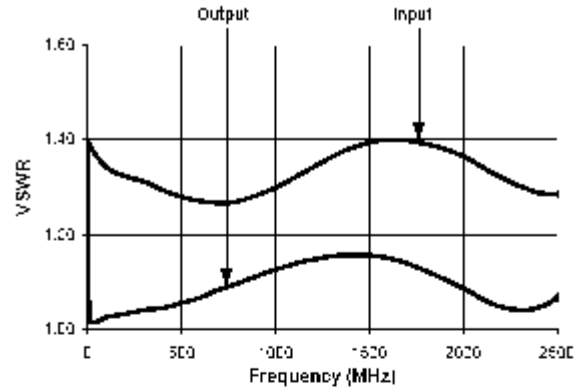


Attenuation Error, 2 dB Bit

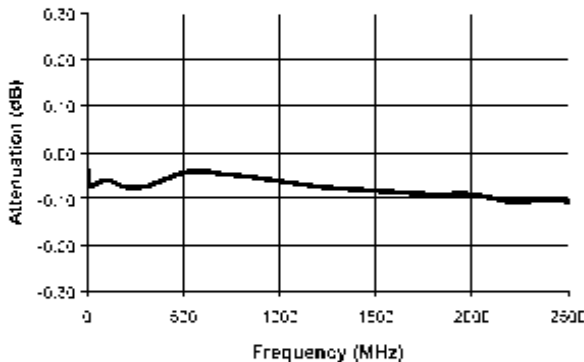


Attenuation Error, 4 dB Bit

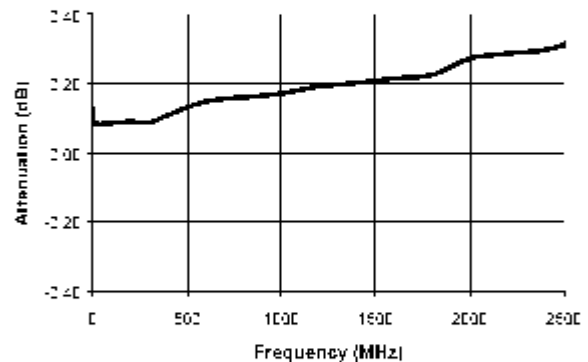

Attenuation Error, 8 dB Bit

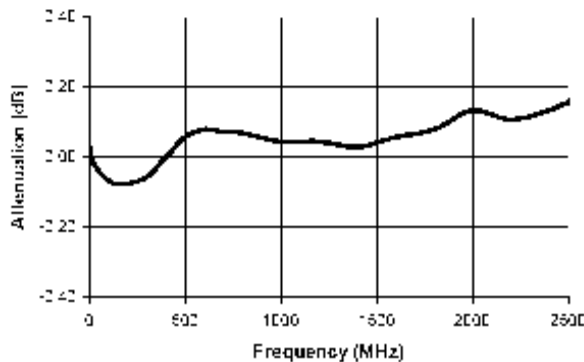


Attenuation Error, 16 dB Bit

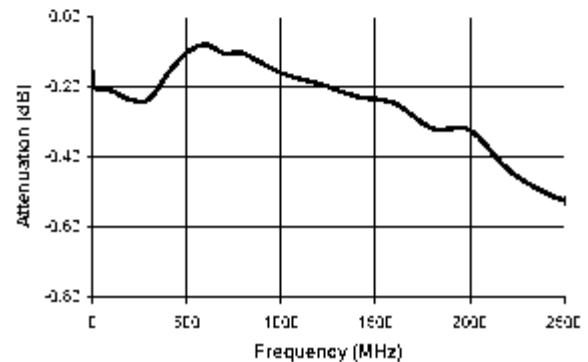


**Digital Attenuator, 30 dB, 4-Bit, TTL Driver
DC - 2.5 GHz**

**AT90-1233
V6**


Attenuation Error, Max. Attenuation

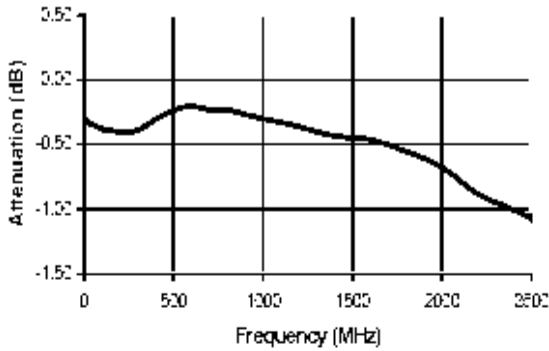


VSWR, 2 dB Bit

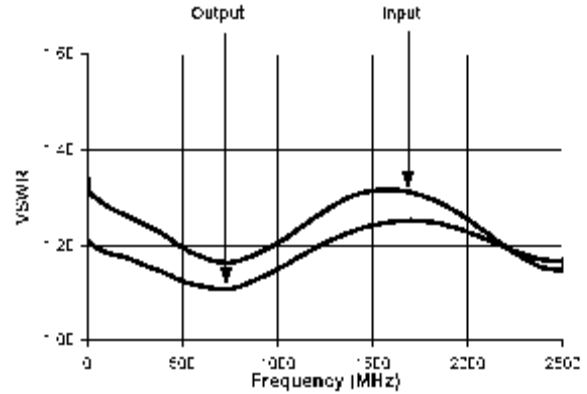


VSWR, 4 dB Bit

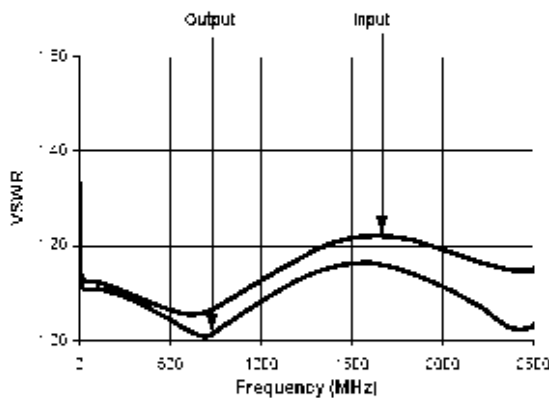

VSWR, 8 dB Bit

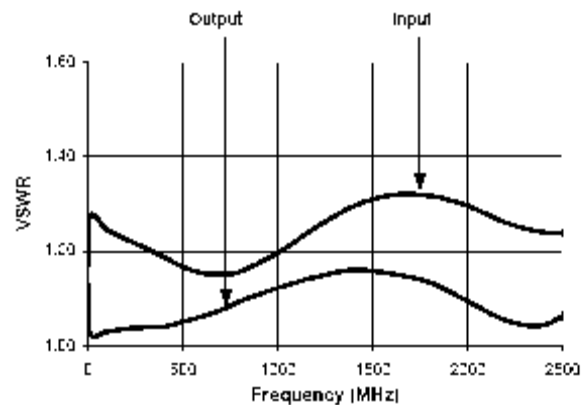

VSWR, 16 dB Bit

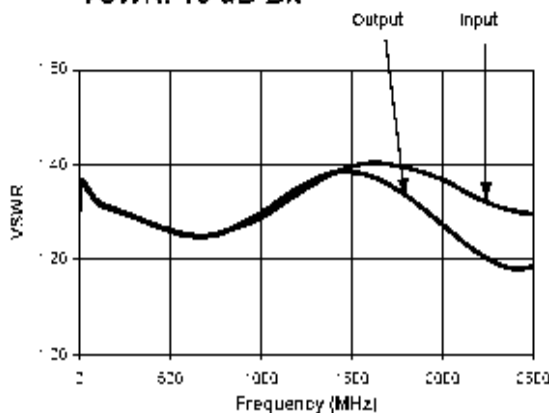

VSWR, Maximum Attenuation

