AVANTEK

IAM-82018
MagIC™ Silicon Bipolar MMIC 5 GHz Active Double Balanced Mixer/IF Amp
January, 1991

Features

- **15 dB RF-IF Conversion Gain From 0.05 - 5 GHz**
- **IF Output From DC to 2 GHz**
- **IF Output P_{1dB} up to + 12 dBm**
- **Single Polarity Bias Supply: V_{cc} = 7 to 13 V**
- **Load-insensitive Performance**
- **Conversion Gain Flat Over Temperature**
- **Low LO Power Requirements: 0 dBm typical**
- **Low RF to IF Feedthrough, Low LO Leakage**
- **Hermetic Glass-Metal Surface Mount Package**

Description

Avantek's IAM-82018 is a complete moderate-power double-balanced active mixer housed in a miniature glass-metal hermetic surface mount package. It is designed for narrow or wide bandwidth commercial, industrial and military applications having RF inputs up to 5 GHz and IF outputs from DC to 2 GHz. Operation at RF and LO frequencies less than 50 MHz can be achieved using optional external capacitors to ground. The IAM-82018 is particularly well suited for applications that require load-insensitive conversion gain and good spurious signal suppression and moderate dynamic range with minimum LO power. Typical applications include frequency downconversion, modulation, demodulation and phase detection for fiber-optic, GPS satellite navigation, mobile radio, and communications receivers.

The IAM series of Gilbert multiplier-based frequency converters is fabricated using Avantek's 10 GHz f_T, 25 GHz f_{MAX} ISOSAT™-I silicon bipolar process which uses nitride self-alignment, submicrometer lithography, trench isolation, ion implantation, gold metallization and polyimide inter-metal dielectric and scratch protection to achieve excellent performance, uniformity and reliability.

Avantek 180 mil Package

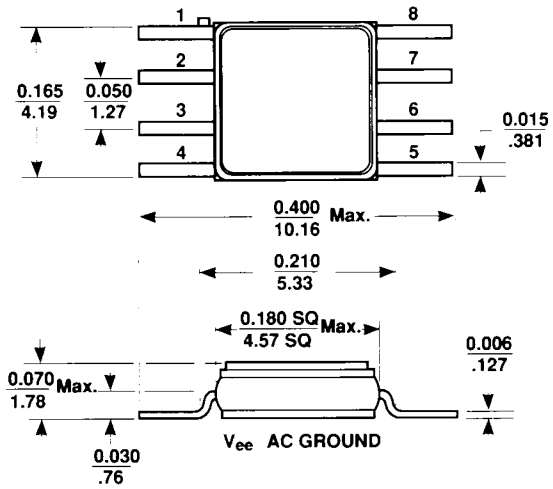

PIN DESCRIPTION			
1	IF Output	8	RF Ground (optional)
2	V_{ee}, AC Ground	7	V_{cc}
3	V_{ee}, AC Ground	6	LO Ground (optional)
4	RF Input	5	LO Input
Bottom of Package is V_{ee} (AC Ground)			

Notes:
(unless otherwise specified)
1. Dimensions are in / mm
2. Tolerances
in .xxx = ±.005
mm .xx = ±.13

TYPICAL RF to IF CONVERSION GAIN vs. RF FREQUENCY
T_A = 25°C (Low Side LO)

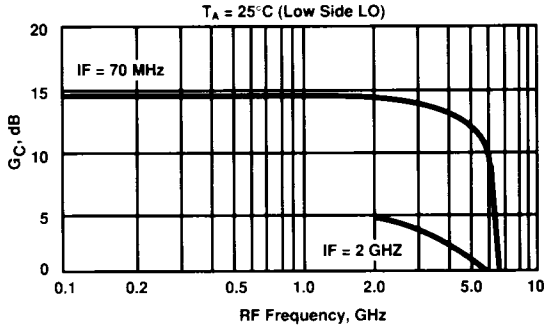

Electrical Specifications[1], T_A = 25°C

Symbol	Parameters and Test Conditions: V_{CC} = 10 V, Z_O = 50 Ω, LO = 0 dBm, RF = -20 dBm		Units	Min.	Typ.	Max.
G_C	Conversion Gain	RF = 2 GHz, LO = 1.75 GHz	dB	13.5	15	16.5
$f_{3\ dB}RF$	RF Bandwidth (G_C 3 dB Down)	IF = 250 MHz	GHz		5.5	
$f_{3\ dB}IF$	IF Bandwidth (G_C 3 dB Down)	LO = 2 GHz	GHz		0.6	
$P_{1\ dB}$	IF Output Power @ 1 dB Gain Compression	RF = 2 GHz, LO = 1.75 GHz	dBm		8	
IP_3	IF Output Third Order Intercept Point	RF = 2 GHz, LO = 1.75 GHz	dBm		18	
NF	SSB Noise Figure	RF = 2 GHz, LO = 1.75 GHz	dB		16	
VSWR	RF Port VSWR	f = 0.05 to 5 GHz			1.5:1	
	LO Port VSWR	f = 0.05 to 5 GHz			2:1	
	IF Port VSWR	f < 2 GHz			2.3:1	
RF_{if}	RF Feedthrough at IF Port	RF = 2 GHz, LO = 1.75 GHz	dBc		–30	
LO_{if}	LO Leakage at IF Port	LO = 1.75 GHz	dBm		–20	
LO_{rf}	LO Leakage at RF Port	LO = 1.75 GHz	dBm		–30	
I_{cc}	Supply Current		mA	40	50	60

Note: 1. The recommended operating voltage range for this device is 7 to 13 V. Typical performance as a function of voltage is on the following page.

IAM-82018 Silicon Bipolar MMIC 5 GHz Active Double Balanced Mixer/IF Amp

Absolute Maximum Ratings

Parameter	Absolute Maximum[1]
Device Voltage	15 V
Power Dissipation[2,3]	1200 mW
RF Input Power	+14 dBm
LO Input Power	+14 dBm
Junction Temperature	200°C
Storage Temperature	–65°C to 200°C

Thermal Resistance[2]: θ_{jc} = 45°C/W

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T_{CASE} = 25°C
3. Derate at 22.2 mW/°C for T_C >146°C

Typical Biasing Configuration and Functional Block Diagram

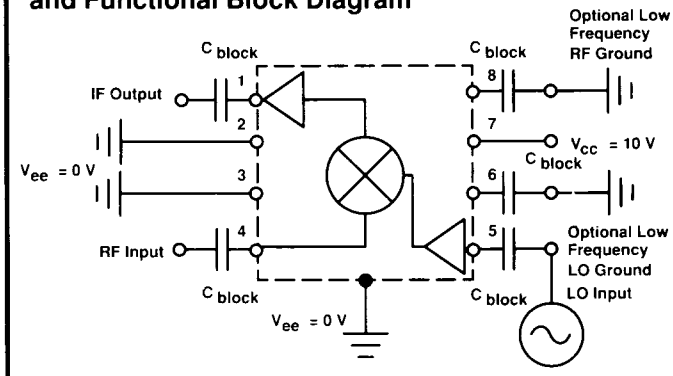

Note: No external BALUNs are required.

Typical Performance, T_A = 25°C, V_{CC} = 10 V
RF: -20 dBm at 2 GHz, LO: 0 dBm at 1.75 GHz

(unless otherwise noted)

CONVERSION GAIN, IF P_1 dB and I_{CC} CURRENT vs. V_{CC} BIAS VOLTAGE

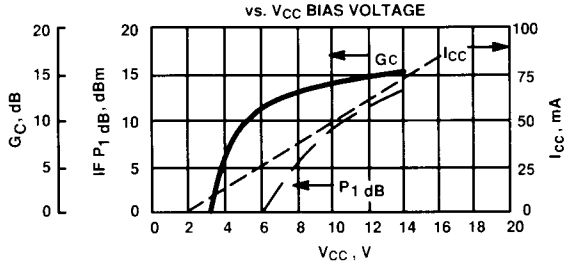

CONVERSION GAIN, IF P_1 dB and I_{CC} CURRENT vs. CASE TEMPERATURE

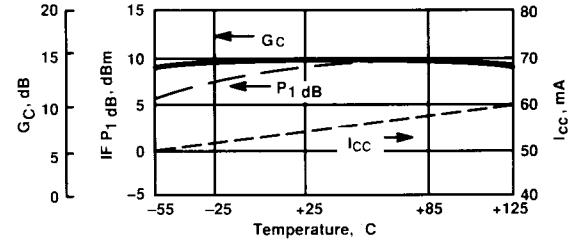

RF to IF CONVERSION GAIN vs. IF FREQUENCY

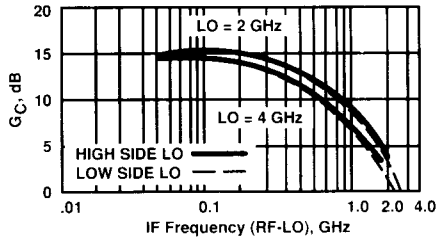

RF, LO and IF PORT VSWR vs. FREQUENCY

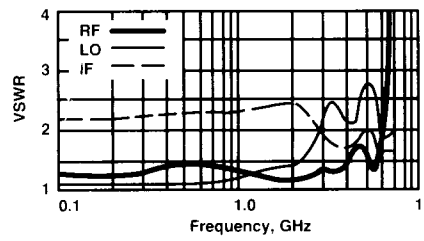

RF to IF CONVERSION GAIN vs. LO POWER

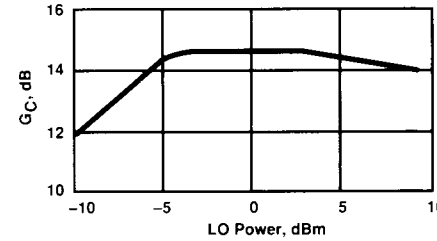

RF FEEDTHROUGH RELATIVE to IF CARRIER, 0 dBm LO to RF and IF LEAKAGE vs. FREQUENCY

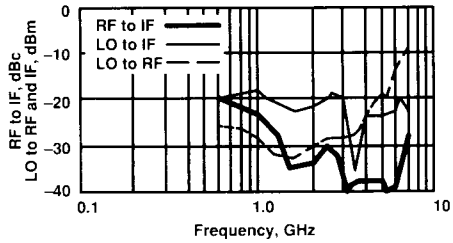

HARMONIC INTERMODULATION SUPRESSION (dB BELOW DESIRED OUTPUT)
RF at 1 GHz, LO at 0.752 GHz, IF at 0.248 GHz

Harmonic LO Order	0	1	2	3	4	5
0	–	23	40	>75	>75	>75
1	12	0	52	60	>75	>75
2	6	35	43	>75	>75	>75
3	27	18	59	74	>75	>75
4	22	38	52	>75	>75	>75
5	41	36	73	74	>75	>75

Harmonic RF Order
Xmn = Pif-P(m*rf-n*lo)

AVANTEK

REGIONAL SALES OFFICES

NORTH AMERICA

EASTERN: Columbia, MD (301) 381-2600

CENTRAL: Palatine, IL (708) 358-8963

WESTERN: Westlake Village, CA (805) 373-3870

ASIA: Milpitas, CA (408) 943-3016

EUROPE: Frimley, England (44) 276-685753

ADS-1652/R-1-91
#200496

Printed in U.S.A.

028507