

SIEMENS

S 041 P FM IF Amplifier with Demodulator

S 041 P is a symmetrical, six-stage amplifier with symmetrical coincidence demodulator for amplifying, limiting, and demodulating frequency-modulated signals. The IC is particularly suited for sets where low current consumption is of importance, or where major supply fluctuations occur. The pin configuration corresponds to the well-known TBA 120. Pin 5 of S 041 P, however, is not connected internally. These types are especially suited for applications in narrow-band FM systems (455 kHz) and in conventional or standard FM IF systems (10.7 MHz).

Features

- Good limiting properties
- Wide voltage range
- Low current consumption
- Few external components

Maximum ratings

Supply voltage	V_S	15	V
Junction temperature	T_J	150	°C
Storage temperature range	T_{STG}	-40 to 126	°C
Thermal resistance (system-air)			
S 041 P	$R_{th BA}$	90	K/W

Operating range

Supply voltage range	V_S	4 to 15	V
Frequency range	f_i	0 to 35	MHz
Ambient temperature range	T_{amb}	-25 to 85	°C


8


Characteristics ($V_S = 12$ V, Q approx. 35, $f_{mod} = 1$ kHz, $T_{amb} = 25^\circ\text{C}$)

		min	typ	max	
Current consumption	I_S	4.0	5.4	6.8	mA
AF output voltage	$V_{q rms}$	100	170		mV
($f_i = 10.7$ MHz, $\Delta f = \pm 50$ kHz, $V_t = 10$ mV)					
Total harmonic distortion	THD		0.65	1.0	%
($f_i = 10.7$ MHz, $\Delta f = \pm 50$ kHz, $V_t = 10$ mV)					
Deviation of AF output voltage	ΔV_q		1.5		dB
($V_S = 15$ V \rightarrow 4 V, $f_i = 10.7$ MHz, $\Delta f = \pm 50$ kHz)					
Input voltage for limiting	V_{lim}		30	60	μV
($f_i = 10.7$ MHz, $\Delta f = \pm 50$ kHz)					
IF voltage gain ($f_i = 10.7$ MHz)	G_V		68		dB
IF output voltage for limiting (each output)	V_{opp}		130		mV
Input impedance $f_i = 10.7$ MHz	Z_i		20/2		$k\Omega/\text{pF}$
$f_i = 455$ kHz	Z_i		50/4		$k\Omega/\text{pF}$
Output resistance (pin 8)	R_o	3.5	5	8.5	$k\Omega$
Voltage drop at AF bypass resistance	V_{11-8}		1.5		V
AM suppression	B_{AM}		60		dB
($V_t = 10$ mV, $\Delta f = \pm 50$ kHz, $m = 30\%$)					


All connections mentioned in the Index refer to S 041 P (e.g. V_1)

Test circuit

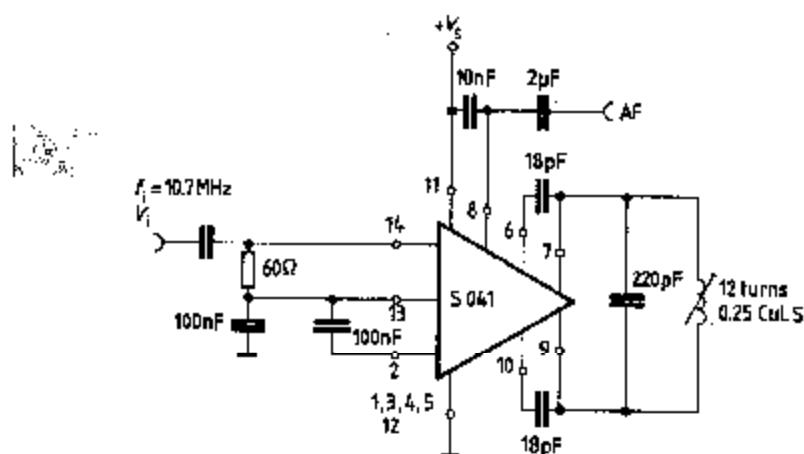

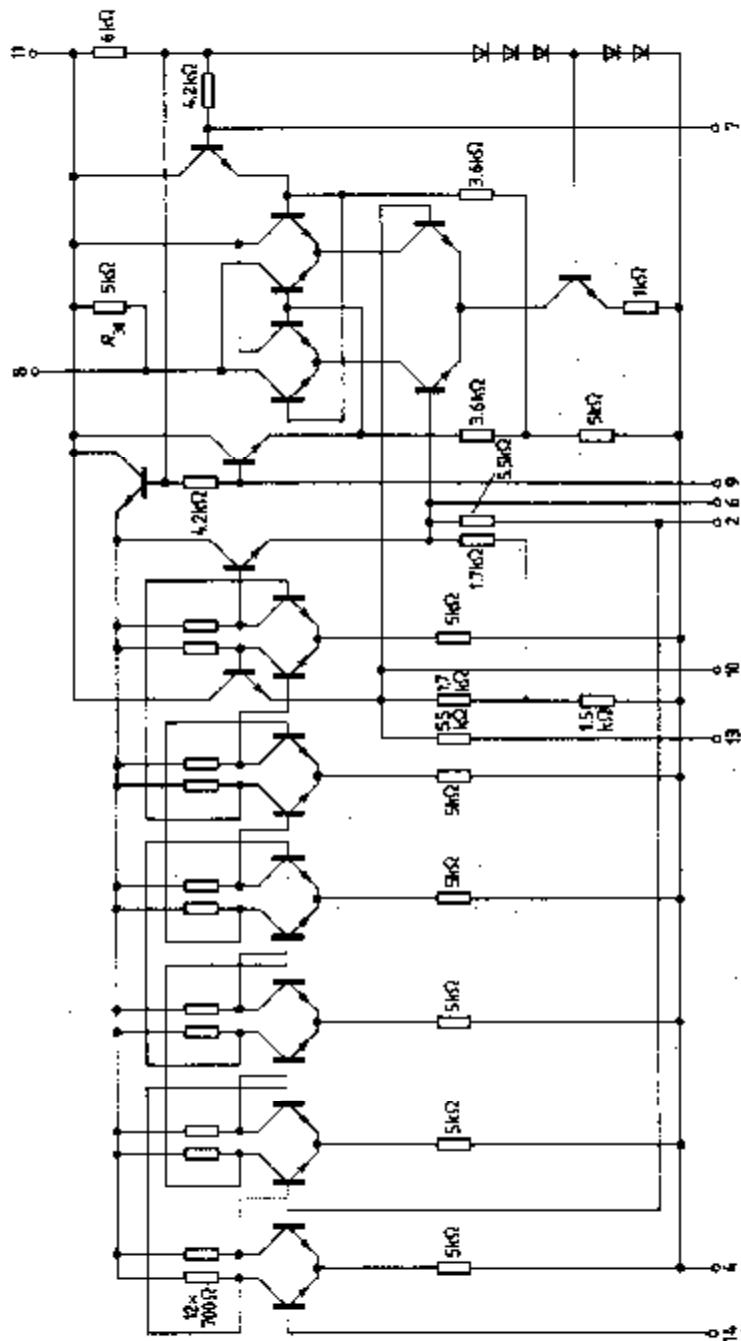**Circuit diagram**


**Application circuit for 10.7 MHz (FM IF)
and 455 kHz (narrow-band FM)**

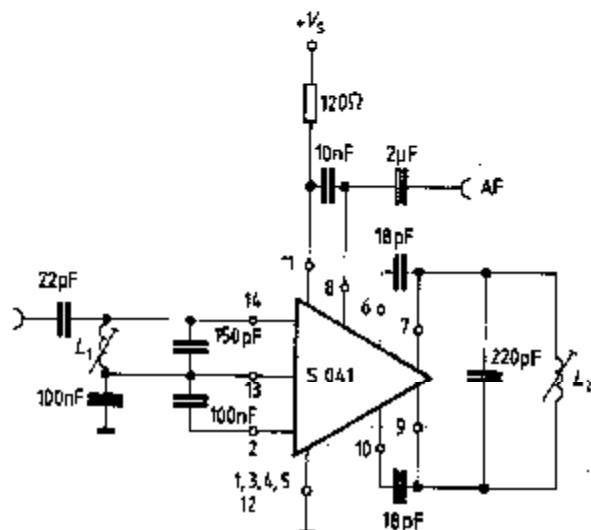


Data in parentheses for 455 kHz (narrow-band FM)

Coils	10.7 MHz	455 kHz
L ₁	15 turns/0.15 CuLS	71.5 turns/12 x 0.04 CuLS
L ₂	12 turns/0.25 CuLS	71.5 turns/12 x 0.04 CuLS
Coil set	D 41-2165	D 41-2393 of Messrs. Vogt


**Current consumption
versus supply voltage**

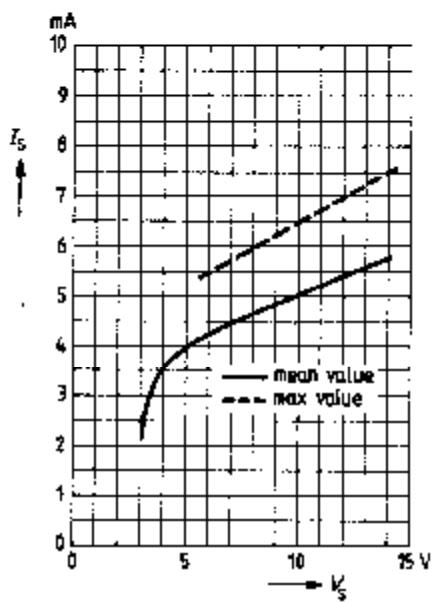

AF output voltage and total harmonic distortion versus supply voltage

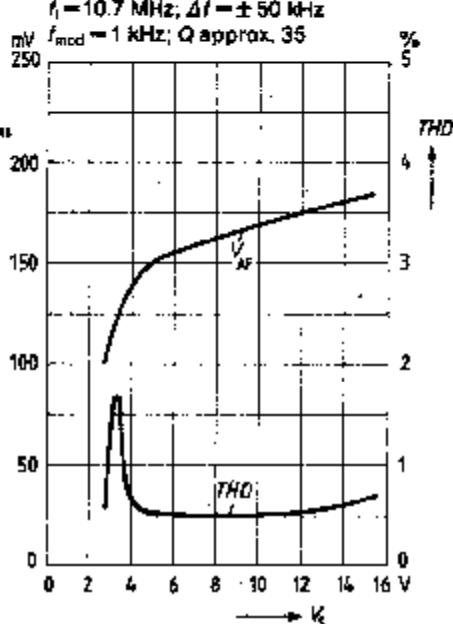

**DC output voltage difference
versus supply voltage
(without signal)**

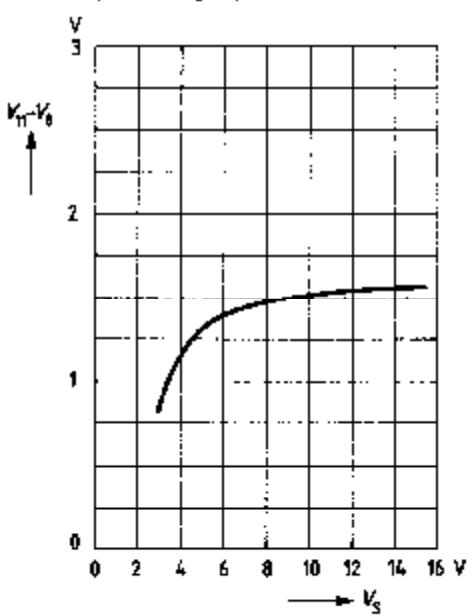

**Input voltage for limiting
versus supply voltage**

