

Dual output voltage regulator with power saving

BA61W12ST

The BA61W12ST is a general-purpose, low saturation power supply with two outputs : 10V, 1A and 5V, 500mA. The IC is available in a compact TO220FP-5 package. The outputs can be turned off during the power saving state with the built-in switch. Also built in the IC are an overcurrent protection circuit, an overvoltage protection circuit, and a thermal shutdown circuit.


●Applications

Car audio systems, VCRs, fax machines, air conditioners, and other household and industrial equipment

●Features

- 1) Dropout voltage differential is 0.5V or less.
- 2) Built-in protection circuits against overcurrent, overvoltage, and overheat.
- 3) Available in a compact TO220FP-5 package (pins are bendable).
- 4) Zero power saving current. (Typ.)

●Block diagram

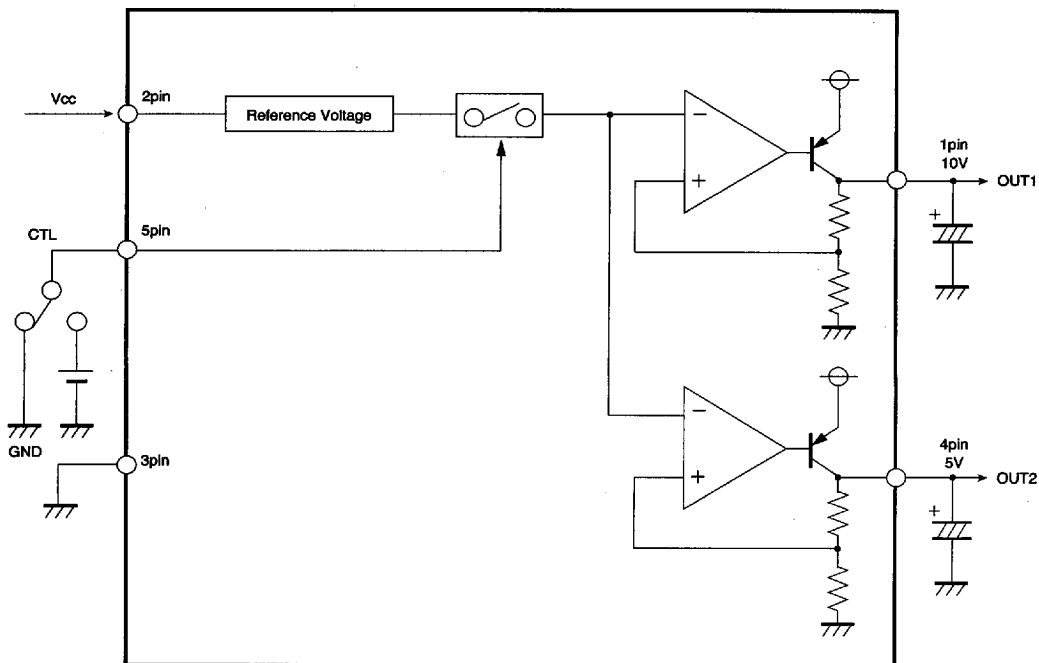

● Absolute maximum ratings ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	35	V
Power dissipation	P_d	2000* ¹	mW
Operating temperature	T_{opr}	$-40\sim+85$	$^{\circ}\text{C}$
Storage temperature	T_{stg}	$-55\sim+150$	$^{\circ}\text{C}$
Peak applied voltage	$V_{CC\text{ Peak}}$	50* ²	V

*1 Reduce power by 16 mW for each degree above 25°C .

*2 Less than 200 ms ($t_r \geq 1\text{msec}$)



● Recommended operating conditions ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V_{CC}	11	15	25	V

● Pin description

Pin No.	Pin name	Function
1	OUT1	Output 1 (10 V, 1 A)
2	V_{CC}	Power supply pin
3	GND	Ground pin
4	OUT2	Output 2 (5 V, 500 mA)
5	CTL	ON/OFF switch

● Input/output circuits

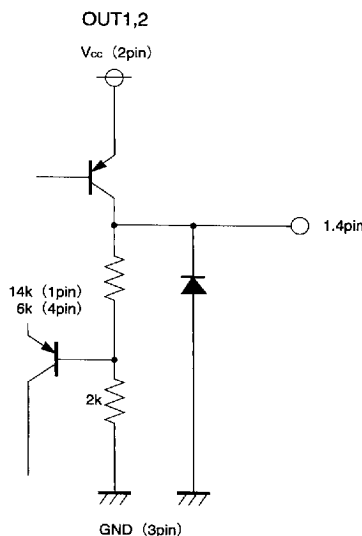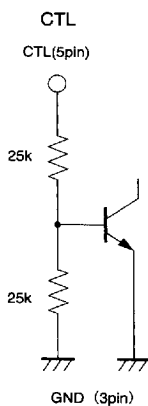

7828999 0018330 T37

ROHM

● Electrical characteristics (unless otherwise noted, $T_a=25^\circ\text{C}$ and $V_{cc}=14.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Power save circuit current	Ist	—	0	10	μA	OFF mode	fig.4
Bias current	Ib	—	3.0	5.0	mA	ON mode	fig.4
[10V output section]							
Output voltage 1	Vo1	9.5	10.0	10.5	V	Io1=500mA	fig.1
Dropout voltage 1	ΔVo1	—	0.3	0.5	V	Io1=500mA $V_{cc}=0.95\text{Vo}$	fig.3
Output current capacity 1	Io1	1.0	—	—	A		fig.1
Ripple rejection 1	R.R1	—	55	—	dB	Io1=500mA, $f=120\text{Hz}$ $e_{in}=1\text{V}_{rms}$	fig.2
Line regulation 1	Reg.I1	—	50	100	mV	$V_{cc}=11\rightarrow 25\text{V}$, Io=500mA	fig.1
Load regulation 1	Reg.L1	—	100	150	mV	Io=5mA \rightarrow 1A	fig.1
Output short-circuit current 1	Ios1	—	150	—	mA	$V_{cc}=25\text{V}$	fig.5
[5V output section]							
Output voltage 2	Vo2	4.75	5.0	5.25	V	Io2=350mA	fig.1
Dropout voltage 2	ΔVo2	—	0.3	0.5	V	Io2=350mA $V_{cc}=0.95\text{Vo}$	fig.3
Output current capacity 2	Io2	500	—	—	mA		fig.1
Ripple rejection 2	R.R2	—	60	—	dB	Io2=350mA, $f=120\text{Hz}$ $e_{in}=1\text{V}_{rms}$	fig.2
Line regulation 2	Reg.I2	—	50	100	mV	$V_{cc}=6\rightarrow 25\text{V}$, Io=350mA	fig.1
Load regulation 2	Reg.L2	—	50	100	mV	Io=5mA \rightarrow 500mA	fig.1
Output short-circuit current 2	Ios2	—	100	—	mA	$V_{cc}=25\text{V}$	fig.5
[Switch section]							
OFF mode voltage	Vth1	2.0	—	—	V	Output ACTIVE mode	fig.6
ON mode voltage	Vth2	—	—	0.8	V	Output OFF mode	fig.6
Input current when HIGH	Iin	—	150	—	μA	Vth=5V	

○ Not designed for radiation resistance.

Note: All the characteristic values are measured with a $0.33\mu\text{F}$ capacitor connected to the input pin and a $22\mu\text{F}$ capacitor connected to the output pin. Measurements are made by using a pulse all cases but noise voltage and the ripple rejection ratio.

7828999 0018331 973

● Measurement circuits

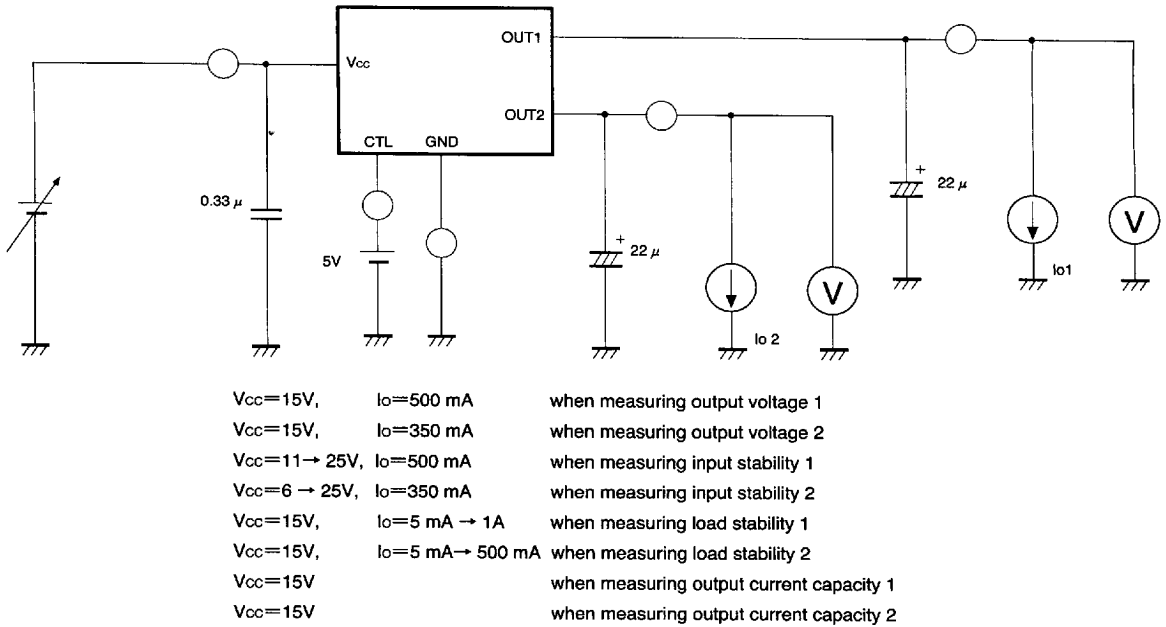


Fig.1 Circuit for measuring output voltage, line regulation, load regulation, and output current capacity

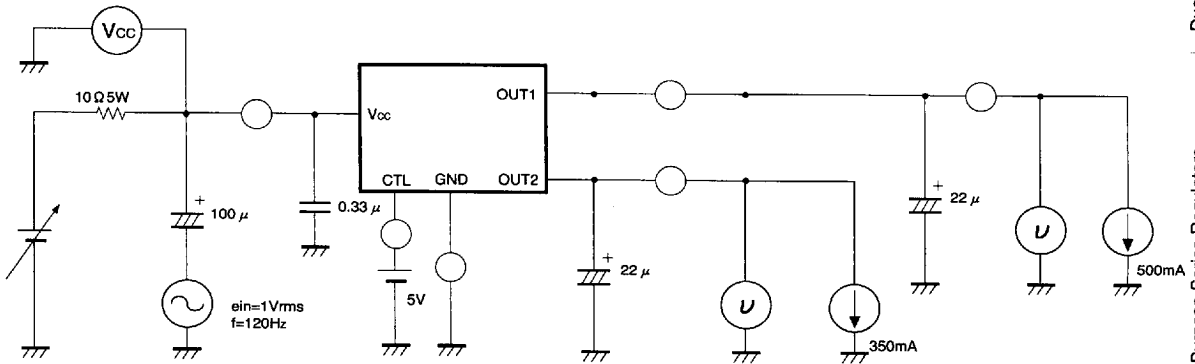


Fig.2 Circuit for measuring ripple rejection

7828999 0018332 80T

ROHM


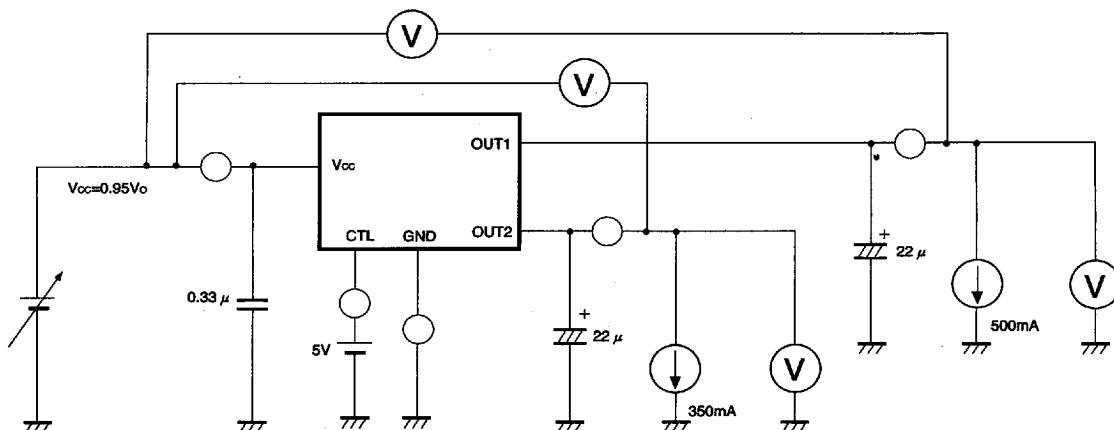


Fig.3 Circuit for measuring dropout voltage

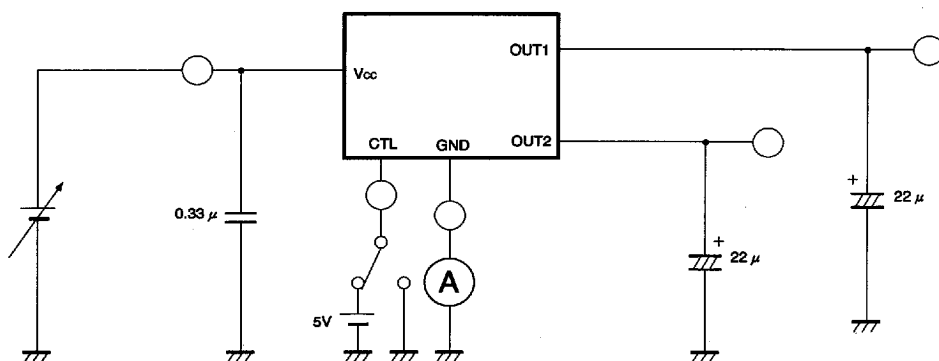

$V_{CC} = 15\text{ V}$, $I_o = 0$ when measuring bias current

Fig.4 Circuit for measuring bias current power save circuit current

7828999 0018333 746

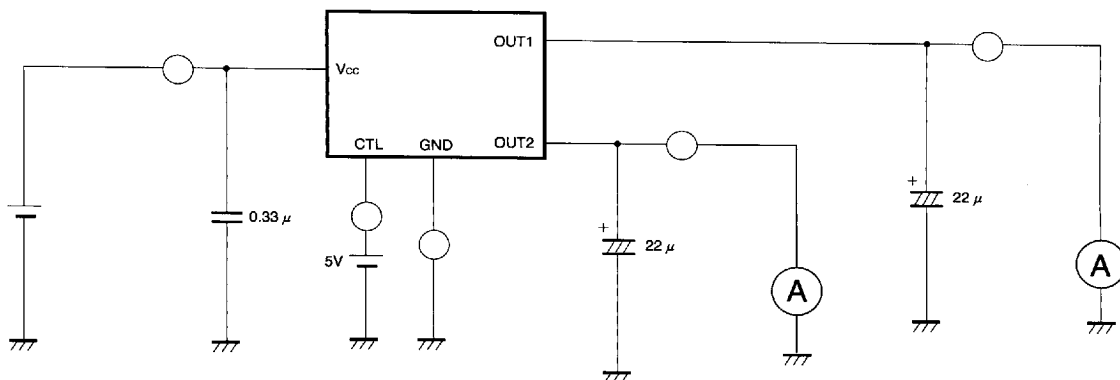


Fig.5 Circuit for measuring output short-circuit current

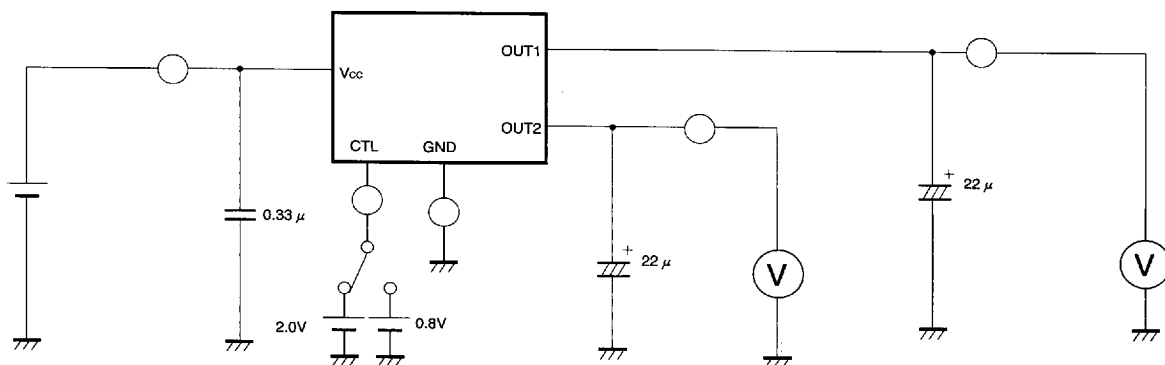
V_{CC}=15V

Fig.6 Circuit for measuring mode switching voltage

7828999 0018334 682

ROHM


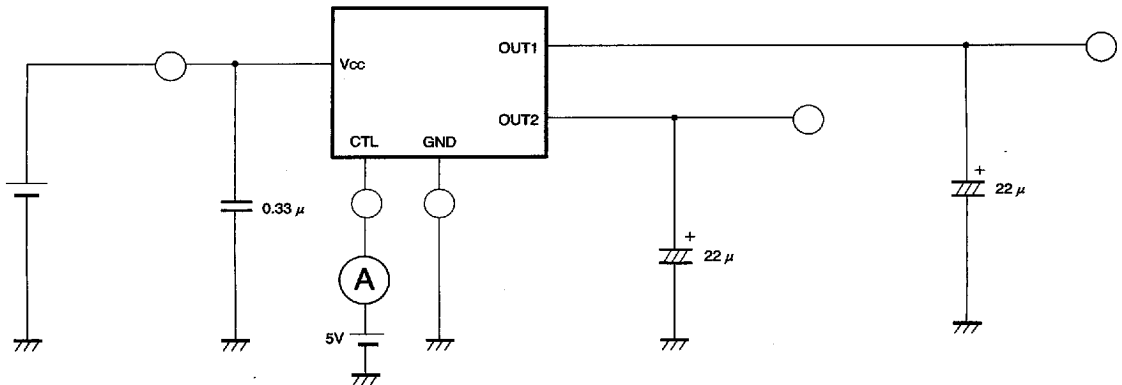


Fig.7 Circuit for measuring input current when HIGH

●Application circuit

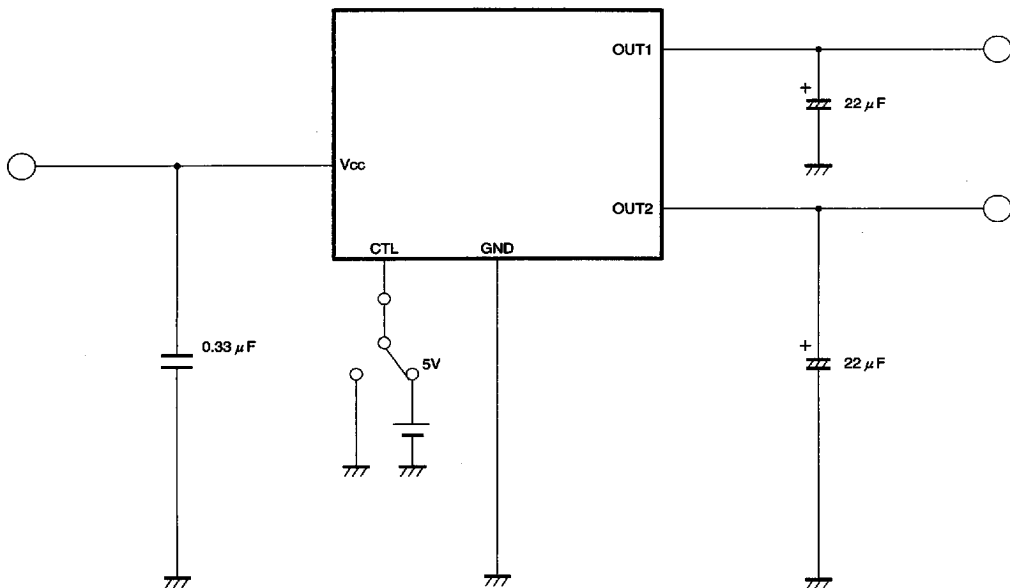

7828999 0018335 519

● Operation notes

1. Operating power supply

When operating within the proper ranges of power supply voltage and ambient temperature, most circuit functions are guaranteed. Although the rated values of electrical characteristics cannot be absolutely guaranteed, characteristic values do not change drastically within the proper ranges.

2. Power dissipation (Pd)

Refer to the power dissipation characteristics in Fig. 10. If power dissipation exceeds the allowable limit, the functionality of the IC will be degraded (such as reduction of current capacity by increased chip temperature). Make sure to use the IC within the allowable range of power dissipation with a sufficient margin.

3. Preventing oscillation at each output and bypass capacitor

To stop output oscillation, make sure to connect a capacitor between GND and each output pin (capacitance of at least $10\ \mu\text{F}$ over the whole operating temperature range is recommended). Oscillation can occur if capacitance is susceptible to temperature. We recommend using a tantalum electrolytic capacitor with minimal changes in capacitance. Also, output can be further stabilized by connecting a bypass capacitor of about $0.33\ \mu\text{F}$ between the input pin and GND. Place the capacitor as near as possible to the input pin.

4. Overcurrent protection circuit

An overcurrent protection circuit is installed in each output system, based on the respective output current. This prevents IC destruction due to overcurrent, by limiting the current with a curve shape of "7" in the voltage-current graph. The IC is designed with margins so that current flow will be restricted and latching will be prevented even if a large current suddenly flows through a large capacitor. Note that these protection circuits are only good for preventing damage from sudden accidents. Make sure your design does not cause the protection circuit to operate continuously under transitional conditions (for instance, if output is clamped at 1Vf or higher, short mode circuit operates at 1Vf or lower). Note that the circuit ability is negatively correlated with temperature.

5. Thermal protection circuit

A built-in thermal protection circuit prevents thermal damage to the IC. All outputs are turned off when the circuit operates, and revert to the original state when the temperature drops to a certain level.

6. We recommend installing a bypass line with a diode in your application if there is a mode where potential difference between each output and input (V_{CC}) or GND is reversed from the normal state. A reversed mode may cause damage to the IC.

7. Although the quality of this IC is rigorously controlled, the IC may be destroyed when the supply voltage or the operating temperature exceeds its absolute maximum rating. Because short mode or open mode cannot be specified when the IC is destroyed, be sure to take physical safety measures, such as fusing, if any of the absolute maximum ratings might be exceeded.

● Electrical characteristic curves

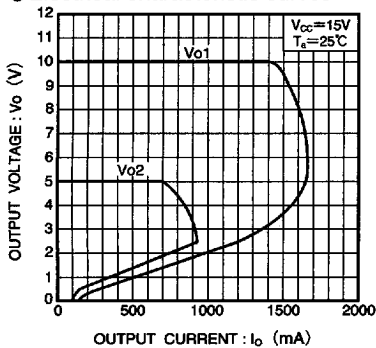


Fig.8 Output current capacity characteristics (typ.)

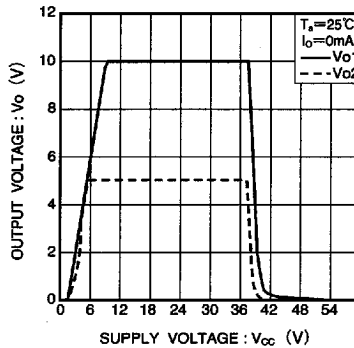


Fig.9 Output vs. supply voltage (typ.)


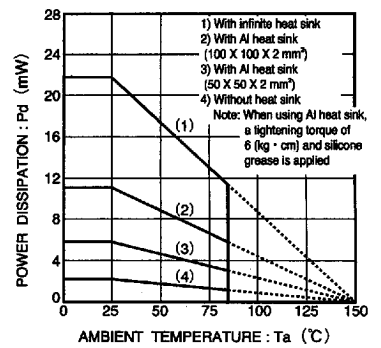


Fig.10 Power derating characteristics

● External dimensions (Units: mm)

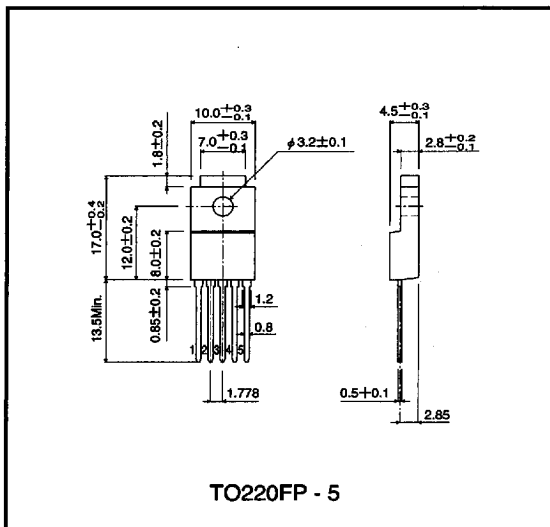

TO220FP - 5

7828999 0018337 391

ROHM