

Product is on Lifetime Buy.
The next generation of higher performance products are in development. Visit our online Selector Guides (<http://mot-sps.com/rf/sg/sg.html>) for scheduled introduction dates.


MHW8222

The RF Line 128-Channel (860 MHz) CATV Amplifier

The MHW8222 is designed specifically for up to 860 MHz CATV systems as amplifiers in trunk and line extender applications. These amplifiers feature ion-implanted, arsenic emitter transistors and an all gold metallization system.

- Specified for 128-Channel Performance
- Broadband Power Gain — @ f = 40–860 MHz
G_p = 22.3 dB Typ @ 860 MHz
- Broadband Noise Figure
NF = 6.4 dB Typ
- Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization

**22 dB GAIN
860 MHz
128 CHANNEL
CATV AMPLIFIER**

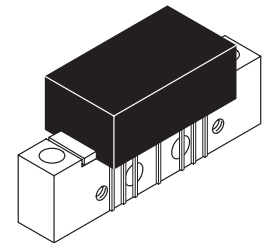

CASE 714Y-03, STYLE 1


ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
DC Supply Voltage	V _{CC}	+28	Vdc
RF Input Voltage (Single Tone)	V _{in}	+70	dBmV
Operating Case Temperature Range	T _C	-20 to +100	°C
Storage Temperature Range	T _{stg}	-40 to +100	°C

ELECTRICAL CHARACTERISTICS (V_{CC} = 24 Vdc, T_C = +30°C, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	40	—	860	MHz
Power Gain f = 50 MHz f = 860 MHz	G _p	20.8 21.8	21.5 22.3	22.2 24	dB
Slope (f = 40–860 MHz)	S	0	1	2	—
Gain Flatness (Peak To Valley) (f = 40–860 MHz)	—	—	0.4	0.8	—
Input/Output Return Loss @ f = 40 MHz	IRL/ORL	20	24	—	dB
Derate Return Loss @ f > 40 MHz	RLD	—	—	0.009	dB/MHz
Composite Second Order (V _{out} = +38 dBmV/ch; 128 Channels)	CSO ₁₂₈	—	-63	-56	dB
Cross Modulation Distortion (V _{out} = +38 dBmV/ch, 128-Channel @ F _m = 55.25 MHz)	XMD ₁₂₈	—	-68	-60	dBc
Composite Triple Beat (V _{out} = +38 dBmV/ch, 128-Channels, Worst Case)	CTB ₁₂₈	—	-62	-60	dBc
Noise Figure f = 50 MHz f = 860 MHz	NF	— —	3.6 6.4	5 7.5	dB
DC Current	I _{DC}	180	220	240	mA

PACKAGE DIMENSIONS

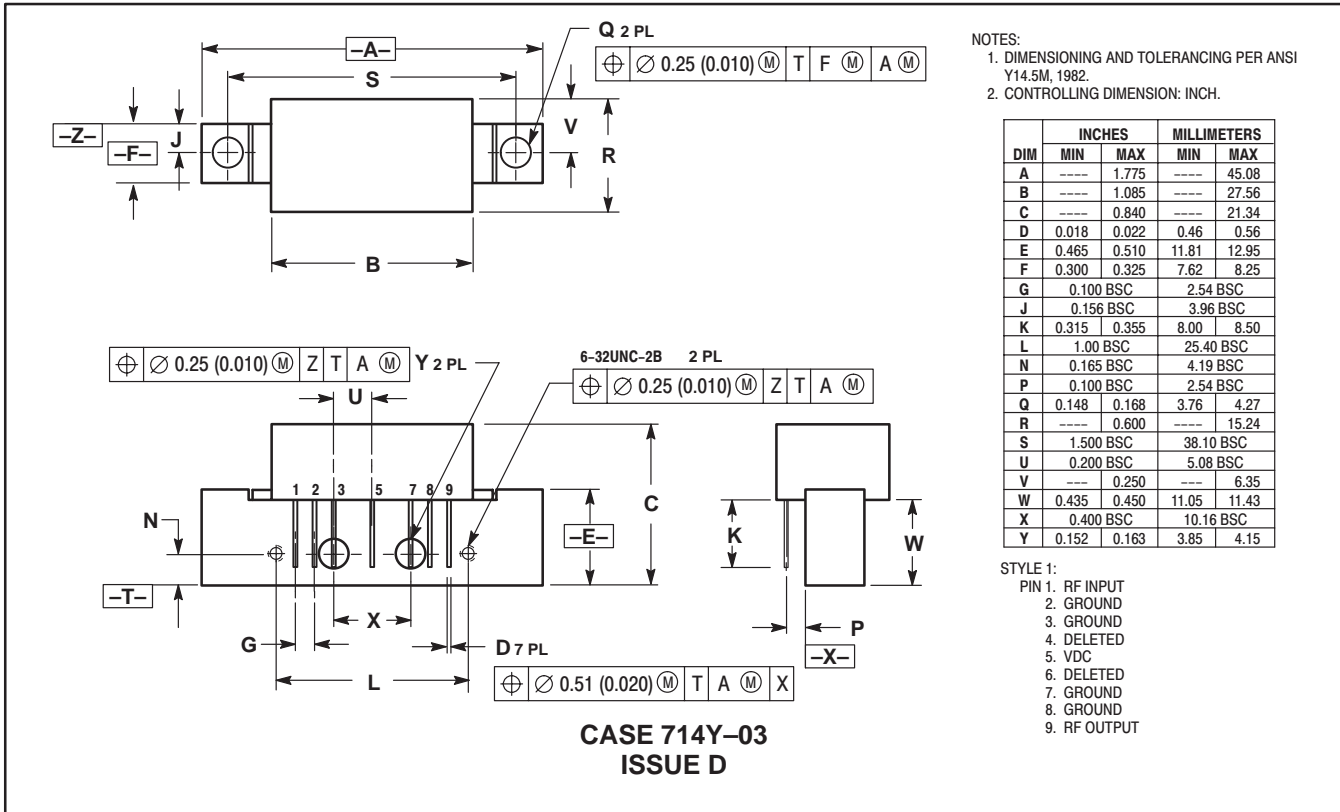

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE: Motorola Literature Distribution;
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
INTERNET: http://Design-NET.com

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

