
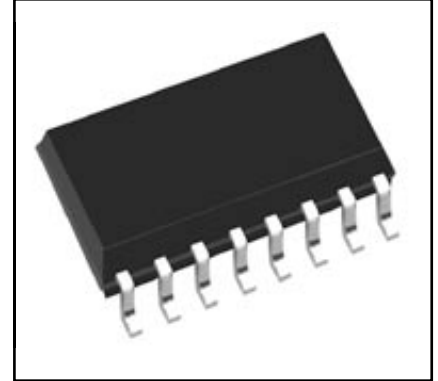


### HVIC High Voltage Half-Bridge Driver 600 Volts/±100mA

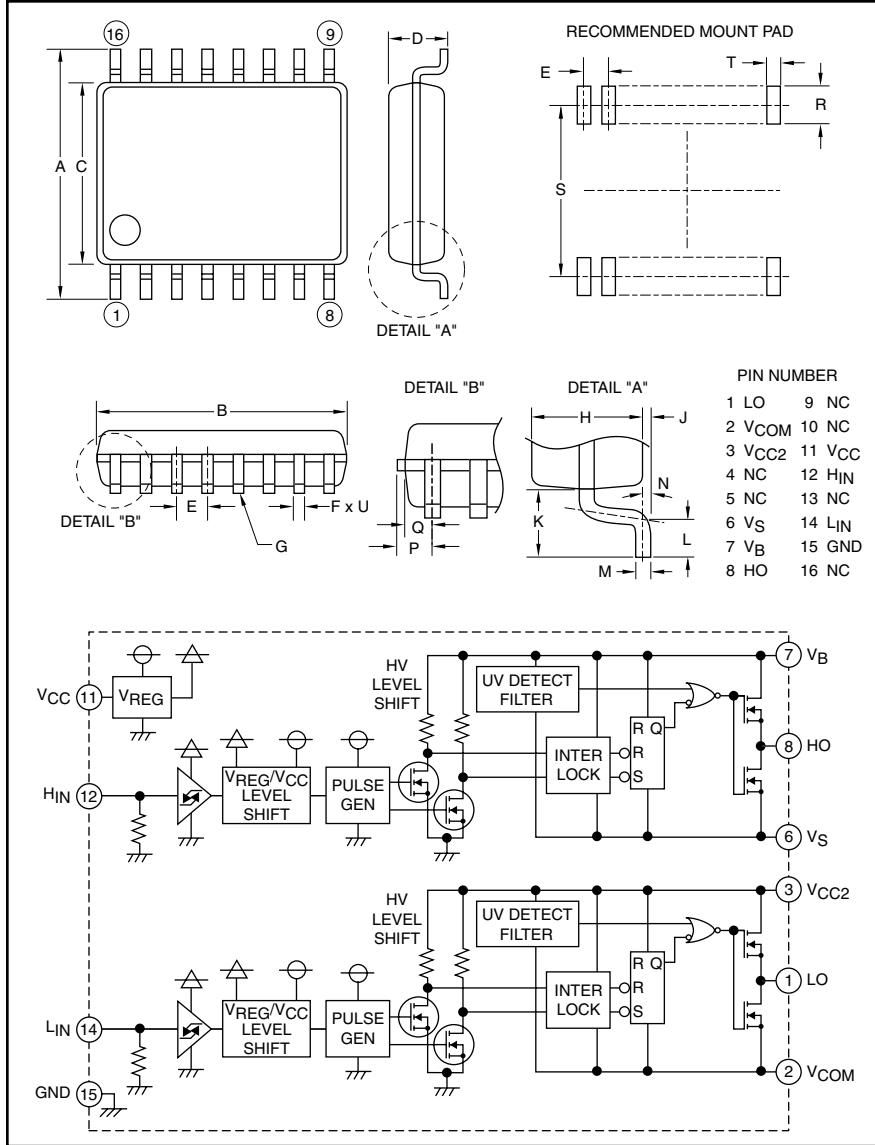

**Description:**  
M81707FP is a high voltage Power MOSFET and IGBT module driver for half-bridge applications.

- Features:**
- Output Current ±100mA
  - Half-Bridge Driver
  - SOP-16 Package

- Applications:**
- HID Ballast
  - PDP
  - MOSFET Driver
  - IGBT Driver
  - Inverter Module Control

**Ordering Information:**  
M81707FP is a ±100mA, 600 Volt HVIC, High Voltage Half-Bridge Driver

#### Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	0.31±0.01	7.8±0.3
B	0.41±0.004	10.1±0.1
C	0.21±0.004	5.3±0.1
D	0.12	2.10
E	0.05	1.27
F	0.02±0.002	0.4±0.05
G	0.004	0.1
H	0.07	1.8
J	0.01±0.004	0.1±0.1
K	0.05	1.25

Dimensions	Inches	Millimeters
L	0.024±0.008	0.6±0.2
M	0.1±0.002	0.2±0.05
N	8°	8°
P	0.03	0.755
Q	0.023	0.605
R	0.05 Min.	1.27 Min.
S	0.30	7.62
T	0.029	0.76
U	0.098 Dia.	0.25 Dia.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81707FP**

**HVIC, High Voltage Half-Bridge Driver**

600 Volts/±100mA

**Absolute Maximum Ratings,  $T_a = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	M81707FP	Units
High Side Floating Supply Absolute Voltage	$V_B$	-0.5 ~ 624	Volts
High Side Floating Supply Offset Voltage	$V_S$	$V_B-24 \sim V_B+0.5$	Volts
High Side Floating Supply Voltage ( $V_{BS} = V_B - V_S$ )	$V_{BS}$	-0.5 ~ 24	Volts
High Side Output Voltage	$V_{HO}$	$V_S-0.5 \sim V_B+0.5$	Volts
Low Side Floating Supply Absolute Voltage	$V_{CC2}$	-0.5 ~ 624	Volts
Output Standard Voltage	$V_{com}$	$V_{CC2}-24 \sim V_{CC2}+0.5$	Volts
Low Side Floating Supply Voltage ( $V_{CC2com} = V_{CC2} - V_{com}$ )	$V_{CC2com}$	-0.5 ~ 24	Volts
Low Side Output Voltage	$V_{LO}$	$V_{com}-0.5 \sim V_{CC2}+0.5$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$	-0.5 ~ 24	Volts
Logic Input Voltage ( $H_{IN}, L_{IN}$ )	$V_{IN}$	-0.5 ~ $V_{CC}+0.5$	Volts
Allowable Offset Voltage Transient	$dV_s/dt$	±50	Volts/ns
Package Power Dissipation ( $T_a = 25^\circ\text{C}$ , On Board)	$P_d$	0.89	Watts
Linear Derating Factor ( $T_a > 25^\circ\text{C}$ , On Board)	$K_\theta$	-8.9	mW/°C
Junction to Case Thermal Resistance	$R_{th(j-c)}$	45	°C/W
Junction Temperature	$T_j$	-40 ~ 125	°C
Operation Temperature	$T_{opr}$	-40 ~ 100	°C
Storage Temperature	$T_{stg}$	-55 ~ 125	°C
Solder Heat Resistance (Pb Free)	$T_L$	255 : 10s, Max. 260	°C

**Recommended Operating Conditions**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
High Side Floating Supply Absolute Voltage	$V_B$		$V_S+10$	—	$V_S+20$	Volts
High Side Floating Supply Offset Voltage	$V_S$	$V_B > 10V$	-5	—	500	Volts
High Side Floating Supply Voltage	$V_{BS}$	$V_B = V_B - V_S$	10	—	20	Volts
High Side Output Voltage	$V_{HO}$		$V_S$	—	$V_B$	Volts
Low Side Floating Supply Absolute Voltage	$V_{CC2}$		$V_{com}+10$	—	$V_{com}+20$	Volts
Output Standard Voltage	$V_{com}$	$V_{CC2} > 10V$	-5	—	500	Volts
Low Side Floating Supply Voltage	$V_{CC2com}$	$V_{CC2com} = V_{CC2} - V_{com}$	10	—	20	Volts
Low Side Output Voltage	$V_{LO}$		$V_{com}$	—	$V_{CC2}$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$		10	—	20	Volts
Logic Input Voltage	$V_{IN}$	$H_{IN}, L_{IN}$	0	—	$V_{CC}$	Volts



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

M81707FP

HVIC, High Voltage Half-Bridge Driver

600 Volts/±100mA


## Electrical Characteristics

$T_a = 25^\circ\text{C}$ ,  $V_{CC} = V_{BS} (= V_B - V_S) = 15\text{V}$  unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Floating Supply Leakage Current	$I_{FS}$	$V_B = V_S = 600\text{V}$	—	—	1.0	$\mu\text{A}$
$V_{com}$ Floating Supply Leakage Current	$I_{FScom}$	$V_{CC2} = V_{com} = 600\text{V}$	—	—	1.0	$\mu\text{A}$
$V_{BS}$ Standby Current	$I_{BS}$	$H_{IN} = L_{IN} = 0\text{V}$	—	0.18	0.4	mA
$V_{CC}$ Standby Current	$I_{CC}$	$H_{IN} = L_{IN} = 0\text{V}$	—	0.30	0.6	mA
$V_{CC2}$ Standby Current	$I_{CC2}$	$H_{IN} = L_{IN} = 0\text{V}$	—	0.18	0.4	mA
$V_{BS}$ Standby Current H	$I_{BSH}$	$H_{IN} = 5\text{V}$	—	0.25	0.5	mA
$V_{CC}$ Standby Current H	$I_{CCH}$	$H_{IN} = 5\text{V}$	—	0.37	0.75	mA
$V_{CC2}$ Standby Current H	$I_{CC2H}$	$H_{IN} = 5\text{V}$	—	0.18	0.4	mA
$V_{BS}$ Standby Current L	$I_{BSL}$	$L_{IN} = 5\text{V}$	—	0.18	0.4	mA
$V_{CC}$ Standby Current L	$I_{CCL}$	$L_{IN} = 5\text{V}$	—	0.37	0.75	mA
$V_{CC2}$ Standby Current L	$I_{CC2L}$	$L_{IN} = 5\text{V}$	—	0.25	0.5	mA
High Level Output Voltage	$V_{OH}$	$I_O = 0\text{A}$ , LO, HO	14.9	—	—	Volts
Low Level Output Voltage	$V_{OL}$	$I_O = 0\text{A}$ , LO, HO	—	—	0.1	Volts
High Level Input Threshold Voltage	$V_{IH}$	$H_{IN}$ , $L_{IN}$	2.0	3.0	4.0	Volts
Low Level Input Threshold Voltage	$V_{IL}$	$H_{IN}$ , $L_{IN}$	0.6	1.5	2.5	Volts
Input Hysteresis Voltage	$V_{INh}$	$V_{INh} = V_{IH} - V_{IL}$	1.0	1.5	2.0	Volts
High Level Input Bias Current 5	$I_{IH5}$	$V_{IN} = 5\text{V}$	—	25	75	$\mu\text{A}$
High Level Input Bias Current 15	$I_{IH15}$	$V_{IN} = 15\text{V}$	—	75	150	$\mu\text{A}$
Low Level Input Bias Current	$I_{IL}$	$V_{IN} = 0\text{V}$	—	—	1.0	$\mu\text{A}$
$V_{BS}$ Supply UV Reset Voltage	$V_{BSuvr}$		7.5	8.6	9.7	Volts
$V_{BS}$ Supply UV Hysteresis Voltage	$V_{BSuvh}$		0.1	0.4	0.7	Volts
$V_{BS}$ Supply UV Filter Time	$t_{VBSuv}$		—	7.5	—	$\mu\text{s}$
$V_{CC}$ Supply UV Reset Voltage	$V_{CCuvr}$		7.5	8.6	9.7	Volts
$V_{CC}$ Supply UV Hysteresis Voltage	$V_{CCuvh}$		0.1	0.4	0.7	Volts
$V_{CC}$ Supply UV Filter Time	$t_{VCCuv}$		—	7.5	—	$\mu\text{s}$
Output High Level Short Circuit Pulsed Current	$I_{OH}$	$V_O = 0\text{V}$ , $V_{IN} = 5\text{V}$ , $P_W < 10\mu\text{s}$	-60	-100	-140	mA
Output Low Level Short Circuit Pulsed Current	$I_{OL}$	$V_O = 15\text{V}$ , $V_{IN} = 0\text{V}$ , $P_W < 10\mu\text{s}$	60	100	140	mA
Output High Level ON Resistance	$R_{OH}$	$I_O = -20\text{mA}$ , $R_{OH} = (V_{OH} - V_O)/I_O$	—	35	70	$\Omega$
Output Low Level ON Resistance	$R_{OL}$	$I_O = 20\text{mA}$ , $R_{OL} = V_O/I_O$	—	50	100	$\Omega$
High Side Turn-On Propagation Delay	$t_{dLH(HO)}$	$C_L = 200\text{pF}$ between HO – $V_S$	85	110	135	ns
High Side Turn-Off Propagation Delay	$t_{dHL(HO)}$	$C_L = 200\text{pF}$ between HO – $V_S$	100	130	160	ns
High Side Turn-On Rise Time	$t_{rH}$	$C_L = 200\text{pF}$ between HO – $V_S$	15	30	70	ns
High Side Turn-Off Fall Time	$t_{fH}$	$C_L = 200\text{pF}$ between HO – $V_S$	20	45	90	ns
Low Side Turn-On Propagation Delay	$t_{dLH(LO)}$	$C_L = 200\text{pF}$ between LO – GND	85	110	135	ns
Low Side Turn-Off Propagation Delay	$t_{dHL(LO)}$	$C_L = 200\text{pF}$ between LO – GND	100	130	160	ns
Low Side Turn-On Rise Time	$t_{rL}$	$C_L = 200\text{pF}$ between LO – GND	15	30	70	ns
Low Side Turn-Off Fall Time	$t_{fL}$	$C_L = 200\text{pF}$ between LO – GND	20	45	90	ns
Delay Matching, High Side and Low Side Turn-On	$\Delta t_{dLH}$	$ t_{dLH(HO)} - t_{dLH(LO)} $	—	—	15	ns
Delay Matching, High Side and Low Side Turn-Off	$\Delta t_{dHL}$	$ t_{dHL(HO)} - t_{dHL(LO)} $	—	—	15	ns
Output Pulse Width	$V_{OPW}$	$V_{IN} : P_W = 200\text{ns}$	200	220	240	ns

**M81707FP**  
**HVIC, High Voltage Half-Bridge Driver**  
 600 Volts/±100mA

**THERMAL DERATING FACTOR CHARACTERISTICS**

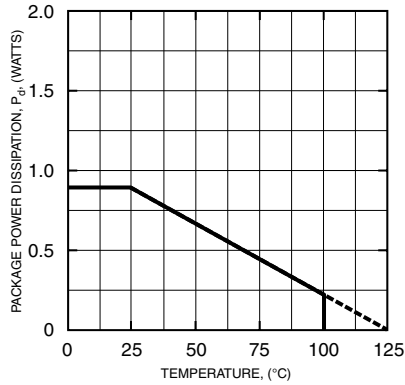

**FUNCTION TABLE (X : HORL)**


H <sub>IN</sub>	L <sub>IN</sub>	V <sub>BS</sub> U <sub>V</sub>	V <sub>CC2COM</sub> U <sub>V</sub>	HO	LO	Behavioral State
L	L	H	H	L	L	LO = HO = Low
L	H	H	H	L	H	LO = High
H	L	H	H	H	L	HO = High
H	H	H	H	H	H	LO = HO = High
X	L	L	H	L	L	HO = Low, V <sub>BS</sub> U <sub>V</sub> Tripped
X	H	L	H	L	H	LO = High, V <sub>BS</sub> U <sub>V</sub> Tripped
L	X	H	L	L	L	LO = Low, V <sub>CC2COM</sub> U <sub>V</sub> Tripped
H	X	H	L	H	L	HO = High, V <sub>CC2COM</sub> U <sub>V</sub> Tripped

NOTE: "L" state of V<sub>BS</sub> U<sub>V</sub>, V<sub>CC2COM</sub> U<sub>V</sub> means that U<sub>V</sub> trip voltage. In the case of both input signals (H<sub>IN</sub> and L<sub>IN</sub>) are "H", output signals (HO and LO) become "H".

**TIMING DIAGRAM**


**1. Input/Output Timing Diagram**

HIGH ACTIVE – When input signal (H<sub>IN</sub> or L<sub>IN</sub>) is "H", then output signal (HO or LO) is "H". In the case of both input signals (H<sub>IN</sub> and L<sub>IN</sub>) are "H", then output signals (HO and LO) become "H".

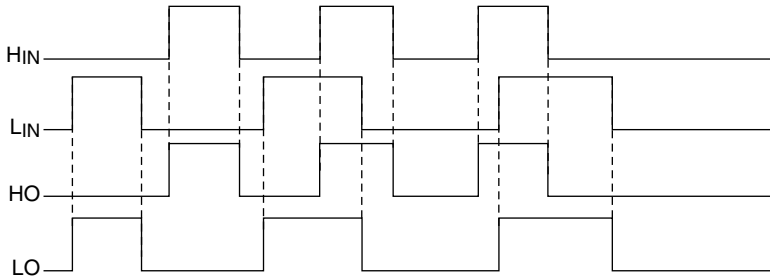

**2. V<sub>CC2COM</sub>(V<sub>BS</sub>) Supply Under Voltage Lockout Timing Diagram**

When V<sub>CC2COM</sub> supply voltage keeps lower U<sub>V</sub> trip voltage (V<sub>CC2COM</sub>U<sub>vt</sub> = V<sub>CC2COM</sub>U<sub>vr</sub> – V<sub>CC2COM</sub>U<sub>vh</sub>) for V<sub>CC2COM</sub> supply U<sub>V</sub> filter time, output signal becomes "L". And then, when V<sub>CC2COM</sub> supply voltage is higher than U<sub>V</sub> reset voltage, output signal becomes normal.

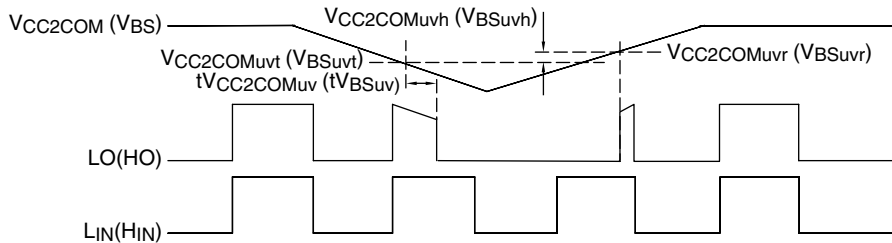

**Consideration – Allowable Supply Voltage Transient**

It is recommended supplying V<sub>CC</sub> first, V<sub>CC2COM</sub> second and V<sub>BS</sub> last. In the case of shutting off supply voltage, shut off V<sub>BS</sub> supply voltage first. Second, shut off V<sub>CC2COM</sub> supply voltage, and last, shut off V<sub>CC</sub> supply voltage.

At the time of starting V<sub>CC2COM</sub> and V<sub>BS</sub>, power supply should be increased slowly. If it is increased rapidly, output signal (HO and LO) may be "H".