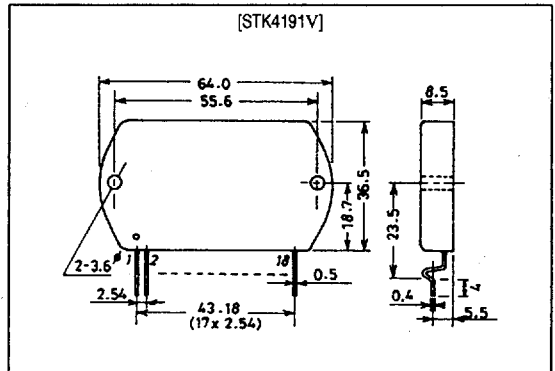


**SANYO****STK4191V****AF Power Amplifier (Split Power Supply)  
(50W + 50W min, THD = 0.08%)****Features**

- Built-in muting circuit to cut off various kinds of pop noise.
- Greatly reduced heat sink due to substrate temperature 125°C guaranteed.
- Distortion 0.08% due to current mirror circuit.
- Pin-compatible with the STK4101III series. The STK4101V series use the same package and are available for output 6W to 50W.
- Excellent cost performance.

**Package Dimensions**

unit: mm

**4040****Specifications****Maximum Ratings** at  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Rated	Unit
Maximum supply voltage	$V_{CC \text{ max}}$		$\pm 53$	V
Thermal resistance	$\theta_{j-c}$		1.8	$^\circ\text{C/W}$
Junction temperature	$T_{j \text{ max}}$		150	$^\circ\text{C}$
Operating substrate temperature	$T_c$		125	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-30 to +125	$^\circ\text{C}$
Available time for load short-circuit	$t_s$	$V_{CC} = \pm 35.5\text{V}, R_L = 8\Omega, f = 50\text{Hz}, P_O = 50\text{W}$	2	s

**Recommended Operating Conditions** at  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Rated	Unit
Recommended supply voltage	$V_{CC}$		$\pm 35.5$	V
Load resistance	$R_L$		8	$\Omega$

**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**  
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

# STK4191V


**Operating Characteristics** at  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = \pm 35.5\text{V}$ ,  $R_L = 8\Omega$  (non-inductive),  $R_g = 600\Omega$ ,  $V_G = 40\text{ dB}$  unless otherwise specified, at specified test circuit (based on sample application circuit)

Parameter	Symbol	Conditions	min	typ	max	Unit
Quiescent current	$I_{CCO}$	$V_{CC} = \pm 42.5\text{V}$	20	40	100	mA
Output power	$P_O$ (1)	$f = 20\text{Hz to } 20\text{kHz}$ , $\text{THD} = 0.08\%$	50			W
	$P_O$ (2)	$V_{CC} = \pm 32\text{V}$ , $f = 1\text{kHz}$ , $\text{THD} = 0.2\%$ , $R_L = 4\Omega$	55			W
Total harmonic distortion	THD	$f = 1\text{kHz}$ , $P_O = 1\text{W}$			0.08	%
Frequency response	$f_L, f_H$	$P_O = 1\text{W}$ , $+0$ $-3$ dB		20 to 50k		Hz
Input impedance	$r_i$	$f = 1\text{kHz}$ , $P_O = 1\text{W}$		55		$k\Omega$
Output noise voltage	$V_{NO}$	$V_{CC} = \pm 42.5\text{V}$ , $R_g = 10k\Omega$			1.2	mVrms
Neutral voltage	$V_N$	$V_{CC} = \pm 42.5\text{V}$	-70	0	+70	mV
Muting voltage	$V_M$		-2	-5	-10	V

Note : For Power supply at the time of test, use a constant-voltage power supply unless otherwise specified.


\* For measurement of the available time for load short-circuit and output noise voltage, use the specified transformer power supply shown right.

\*\* The output noise voltage is represented by the peak value on rms scale (VTVM) of average value indicating type. For AC power supply, use an AC stabilized power supply (50Hz) to eliminate the effect of flicker noise in AC primary line.

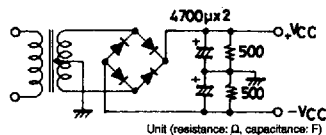


Specified transformer power supply  
(Equivalent to MG-200)

## Equivalent Circuit

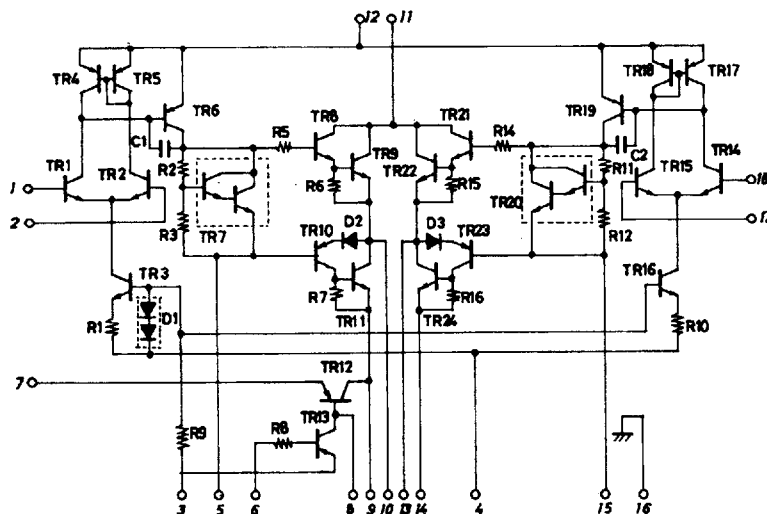

Sample Application Circuit : 50W min AF Power Amplifier (2 channels)

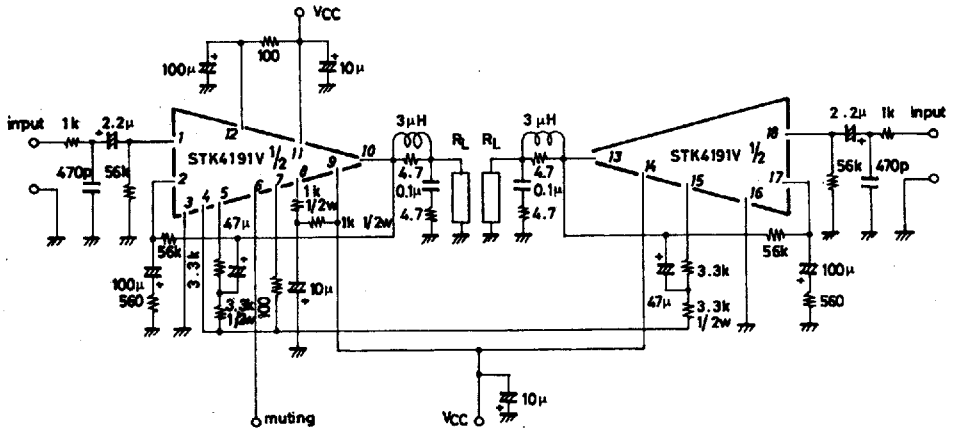

Unit (resistance: Ω, capacitance: F)

