

SHINDENGEN

Super Fast Recovery Rectifiers

Single

D1FL40

400V 0.8A


FEATURES

- Small SMT
- Low noise
- trr50ns

APPLICATION

- Switching power supply
- DC/DC converter
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

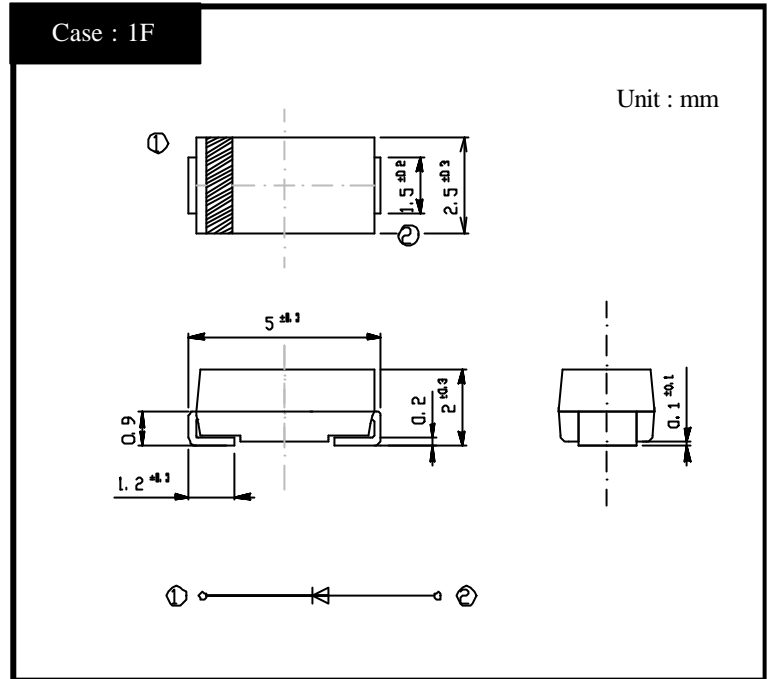

RATINGS

Absolute Maximum Ratings (If not specified Tl=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V _{RM}		400	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Ta=25 On alumina substrate	0.8	A
		50Hz sine wave, R-load, Ta=25 On glass-epoxy substrate	0.6	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25	25	A

Electrical Characteristics (If not specified Tl=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =0.8A, Pulse measurement	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.10	μA
Reverse Recovery Time	t _{rr}	I _F =0.5A, I _R =1A	Max.50	ns
Thermal Resistance	j	junction to lead	Max.23	/W
		junction to ambient, On alumina substrate	Max.108	
		junction to ambient, On glass-epoxy substrate	Max.157	


D1FL40

Forward Voltage

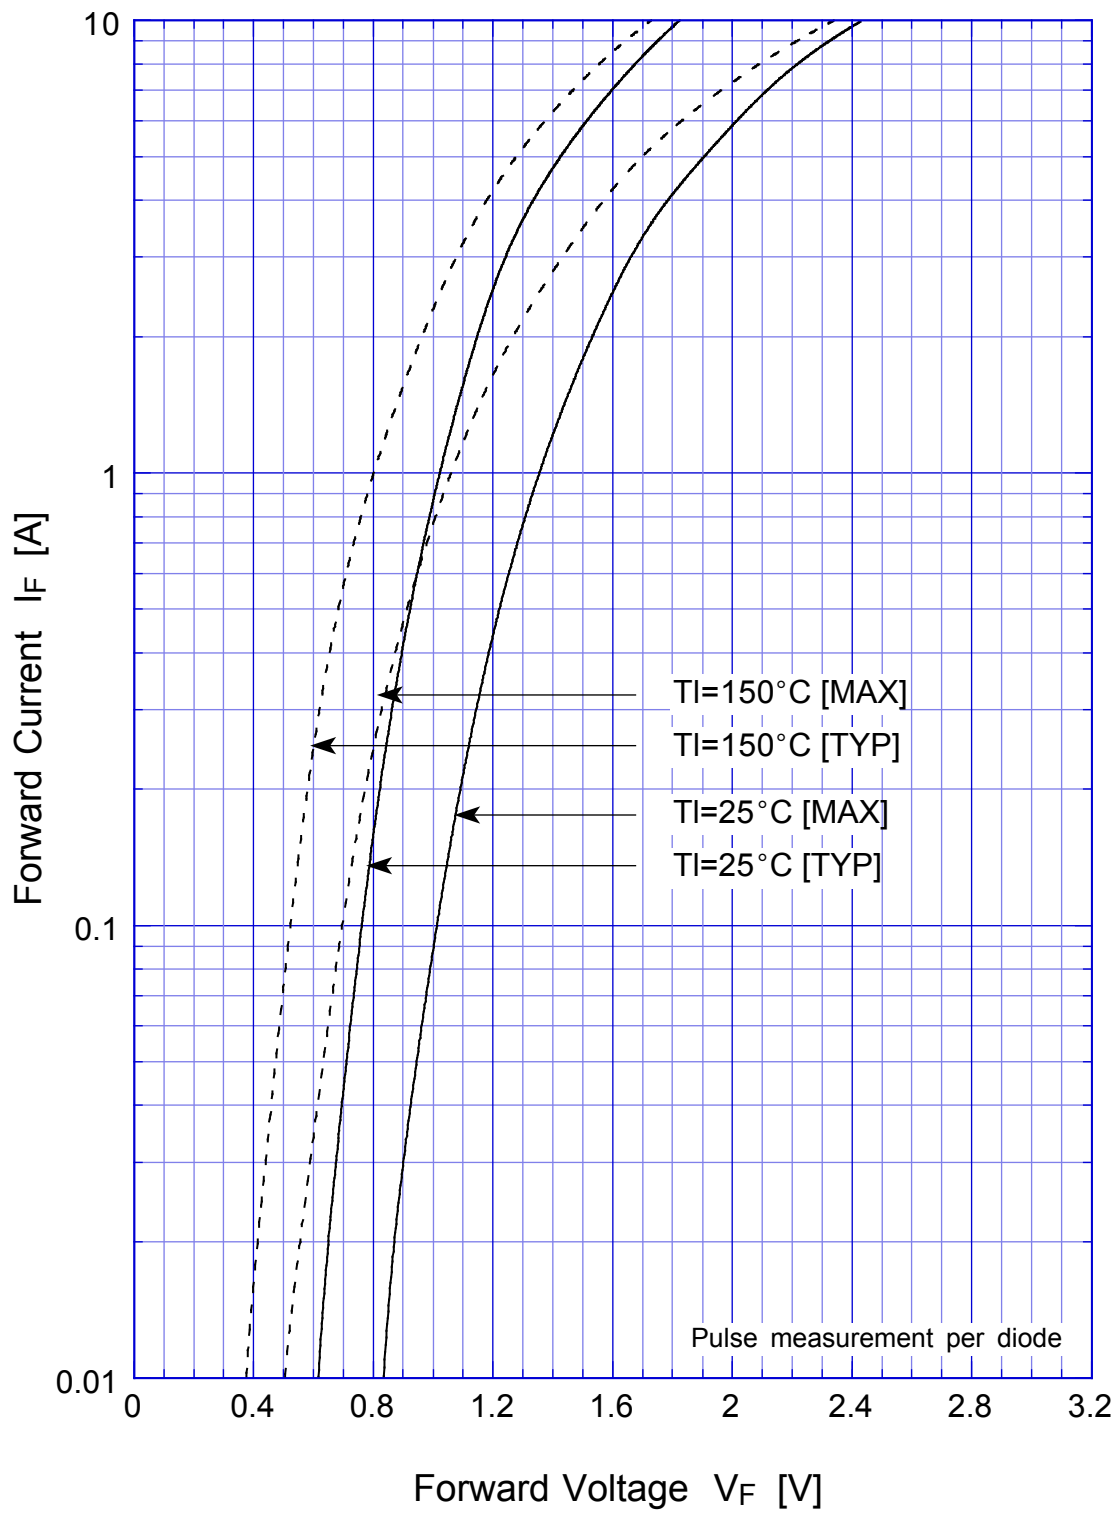


D1FL40

Forward Power Dissipation

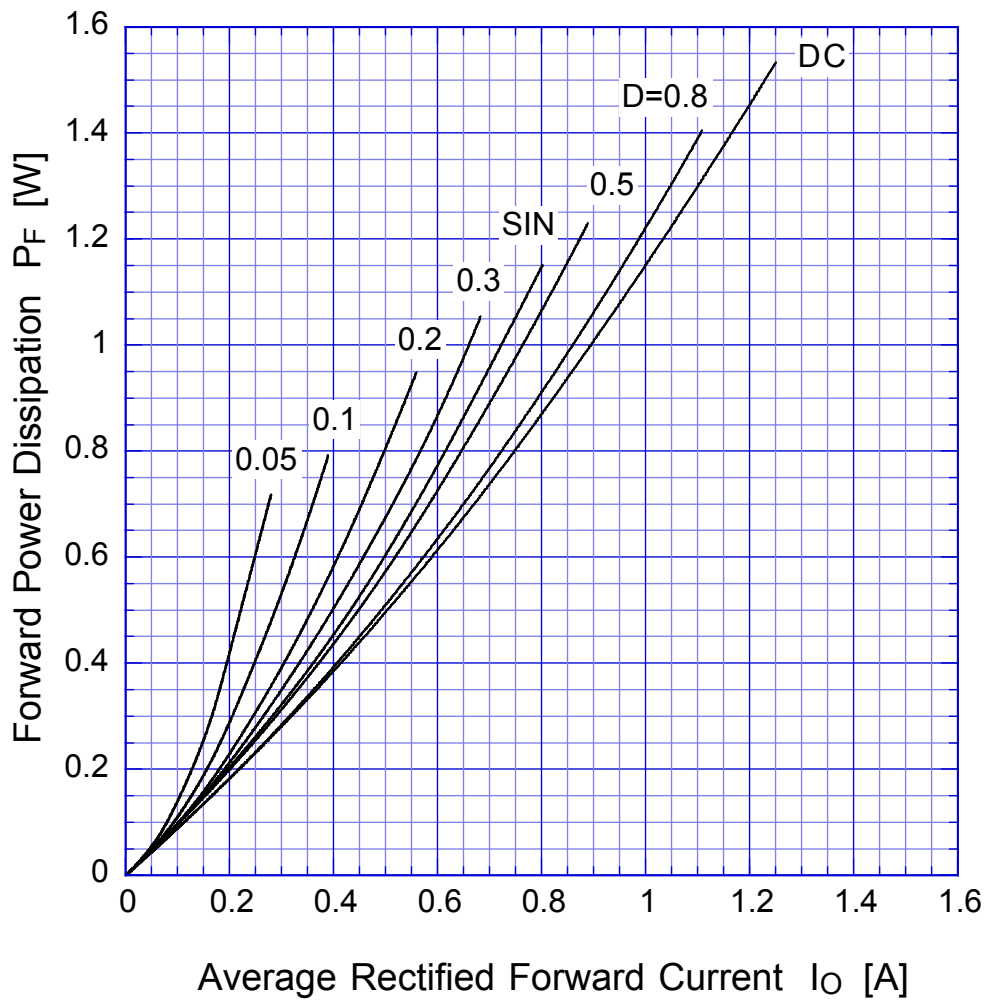


$T_j = T_{jmax}$

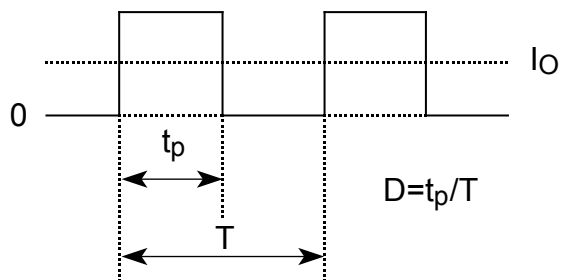

D1FL40

Derating Curve

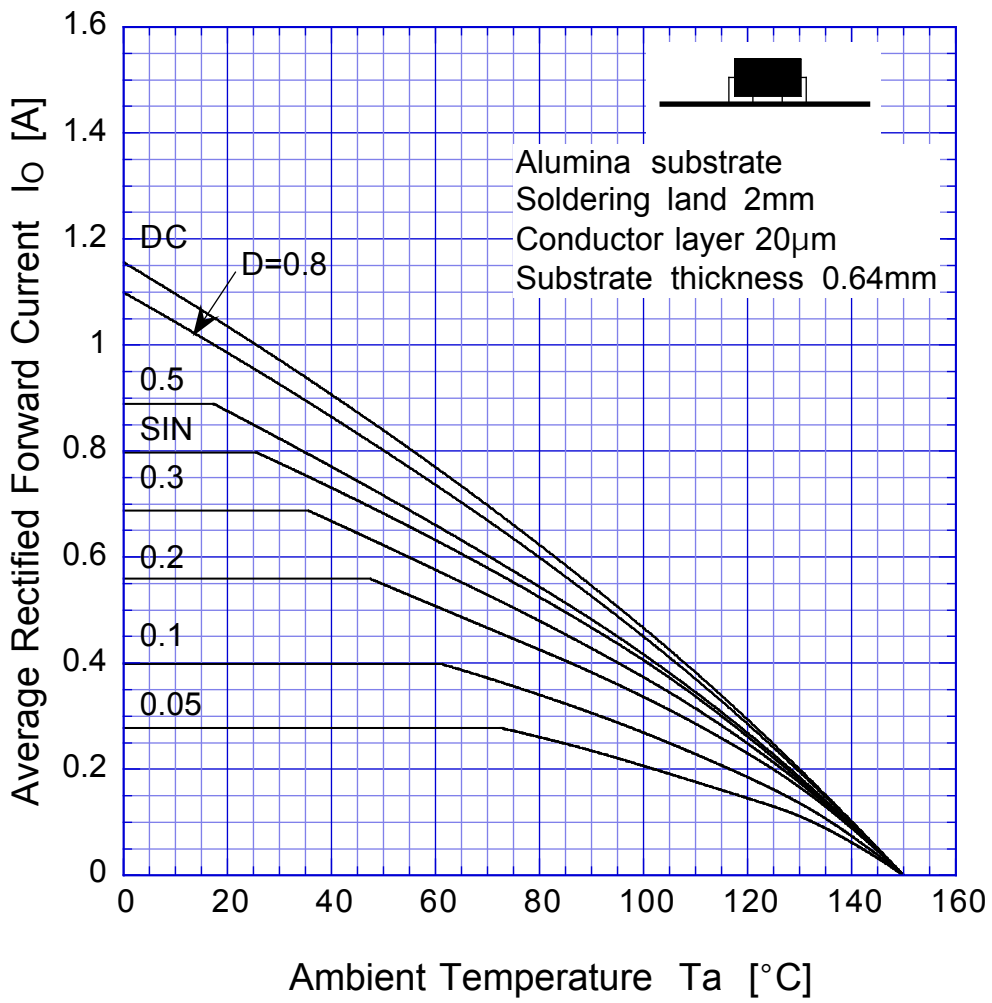


$$V_R = V_{RM}$$



D1FL40

Derating Curve

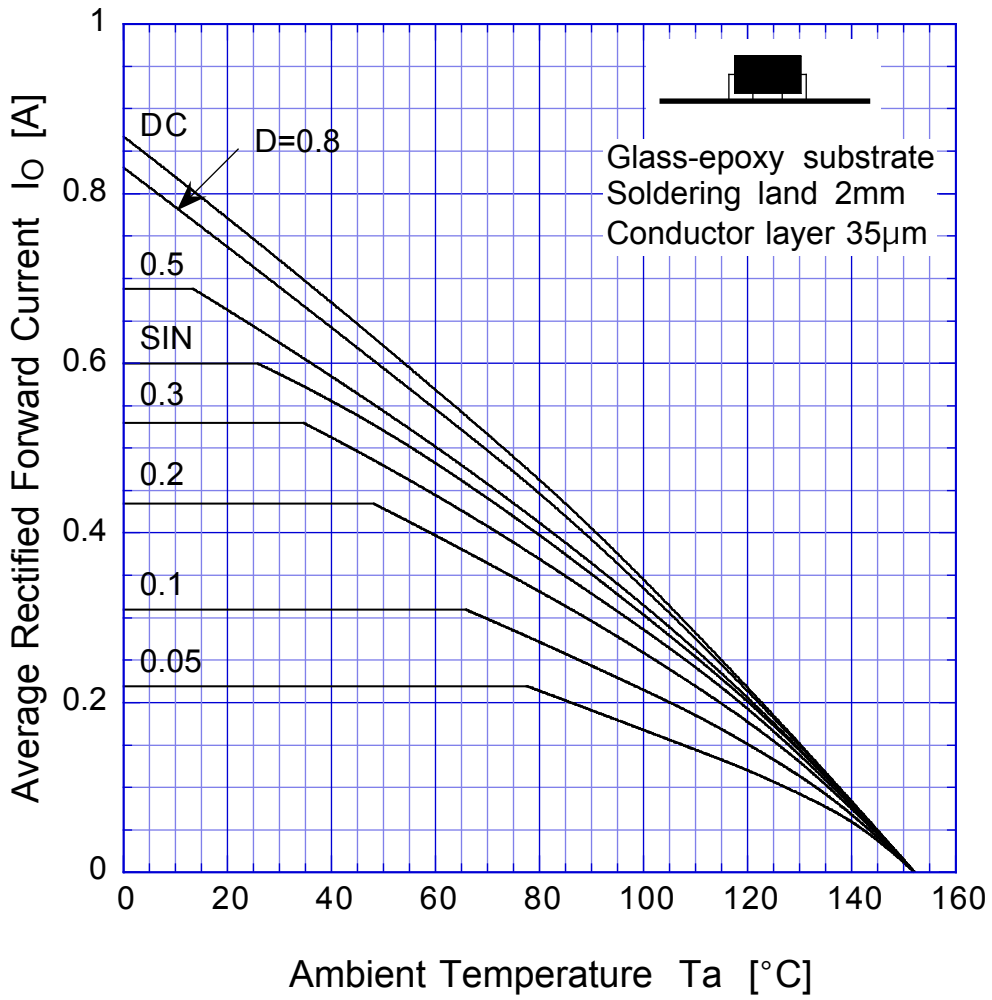


$$V_R = V_{RM}$$



D1FL40

Peak Surge Forward Capability

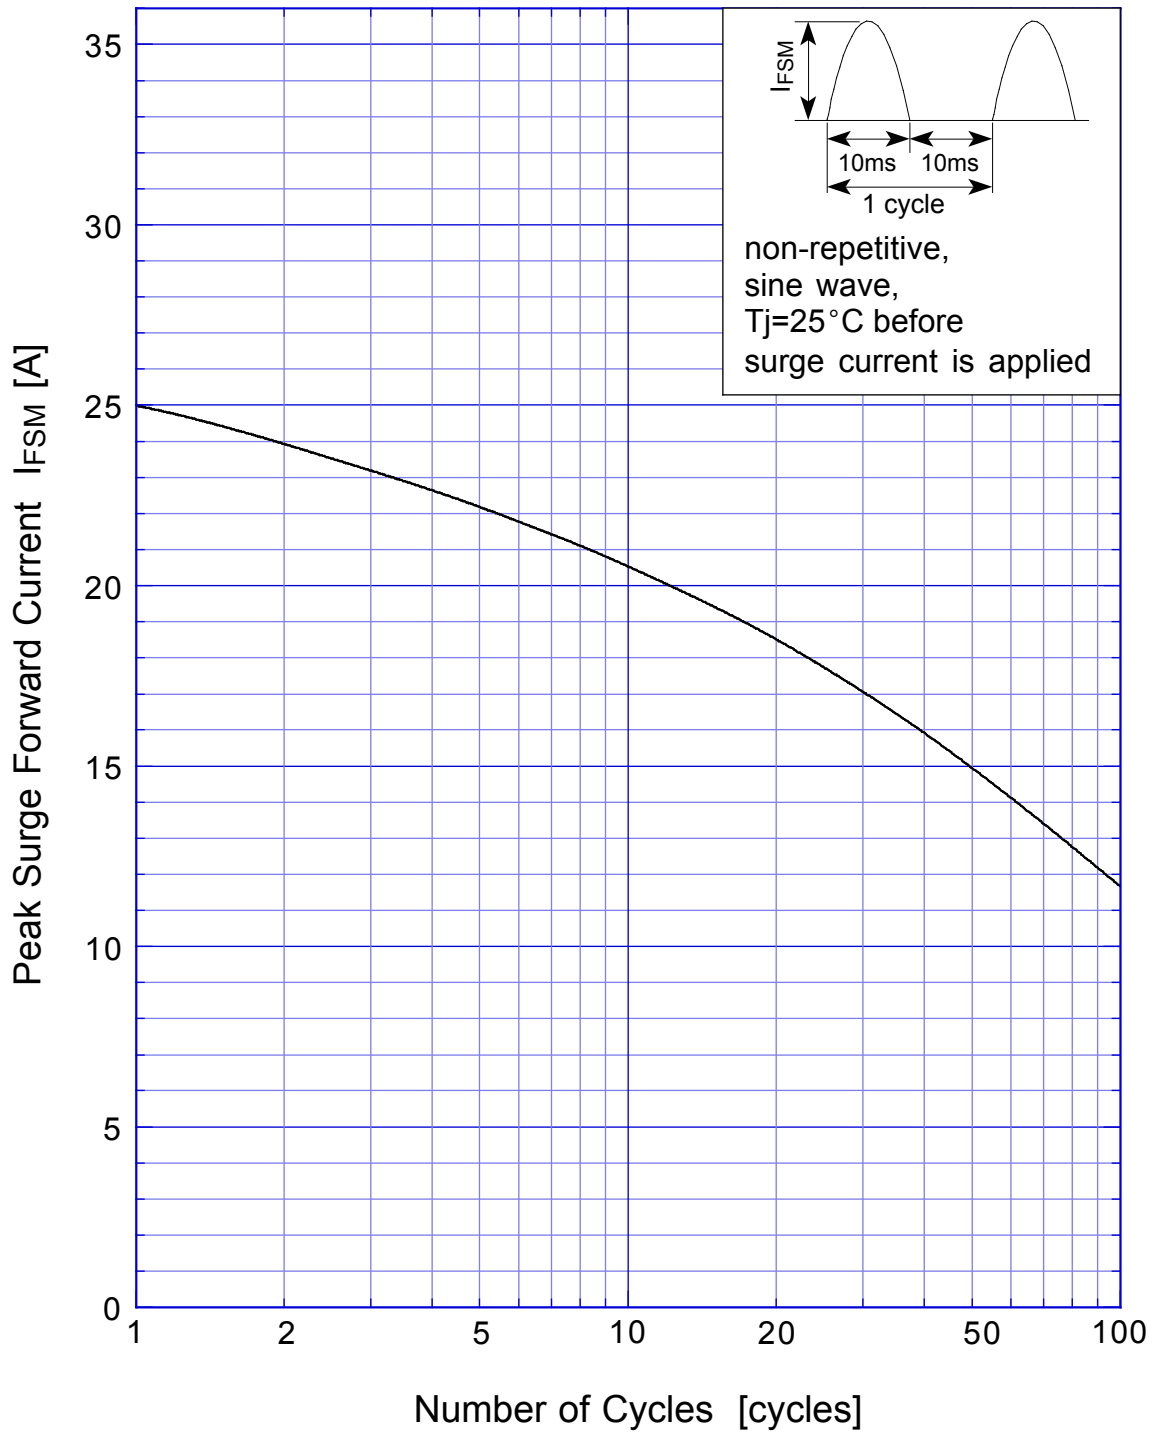

D1FL40 Junction Capacitance

