

# SHINDENGEN

## Schottky Rectifiers (SBD)

Dual

# DF10SC4M

## 40V 10A


### FEATURES

- SMT
- Tj150
- P<sub>RRSM</sub> avalanche guaranteed
- High current capacity with Small Package

### APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

### OUTLINE DIMENSIONS

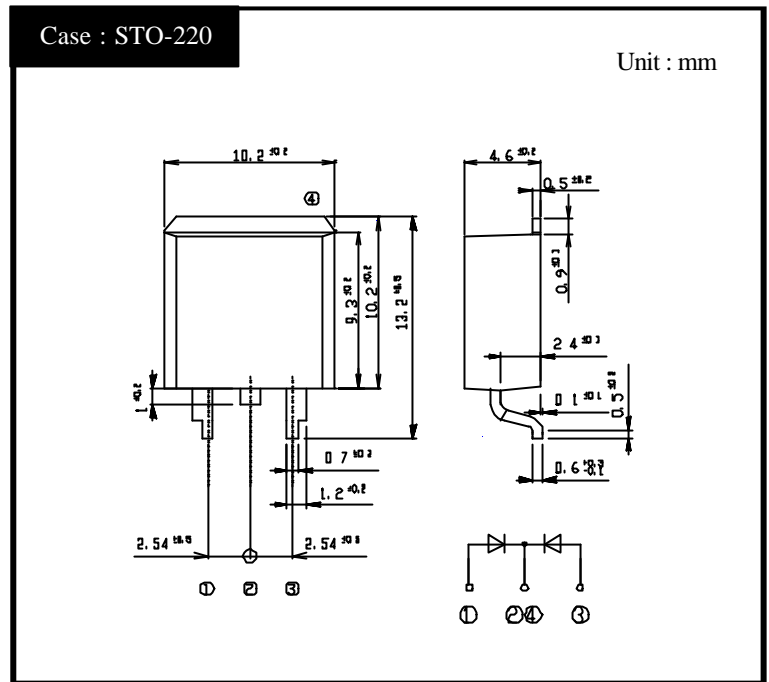

### RATINGS


Absolute Maximum Ratings (If not specified Tc=25 )

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V <sub>RM</sub>		40	V
Repetitive Peak Surge Reverse Voltage	V <sub>RRSM</sub>	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I <sub>o</sub>	50Hz sine wave, R-load, Rating for each diode I <sub>o</sub> /2, With heatsink, Tc=125	10	A
		50Hz sine wave, R-load, Rating for each diode I <sub>o</sub> /2, On Al-Cu substrate, Ta=33	6.8	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=125	100	A
Repetitive Peak Surge Reverse Power	P <sub>RRSM</sub>	Pulse width 10 μs, Rating of per diode, Tj=25	330	w


Electrical Characteristics (If not specified Tc=25 )

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max.3.5	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ.180	pF
Thermal Resistance	jc	junction to case	Max.3	/W
	ja	junction to ambient, On Al-Cu substrate	Max.25	


# DF10SC4M Forward Voltage

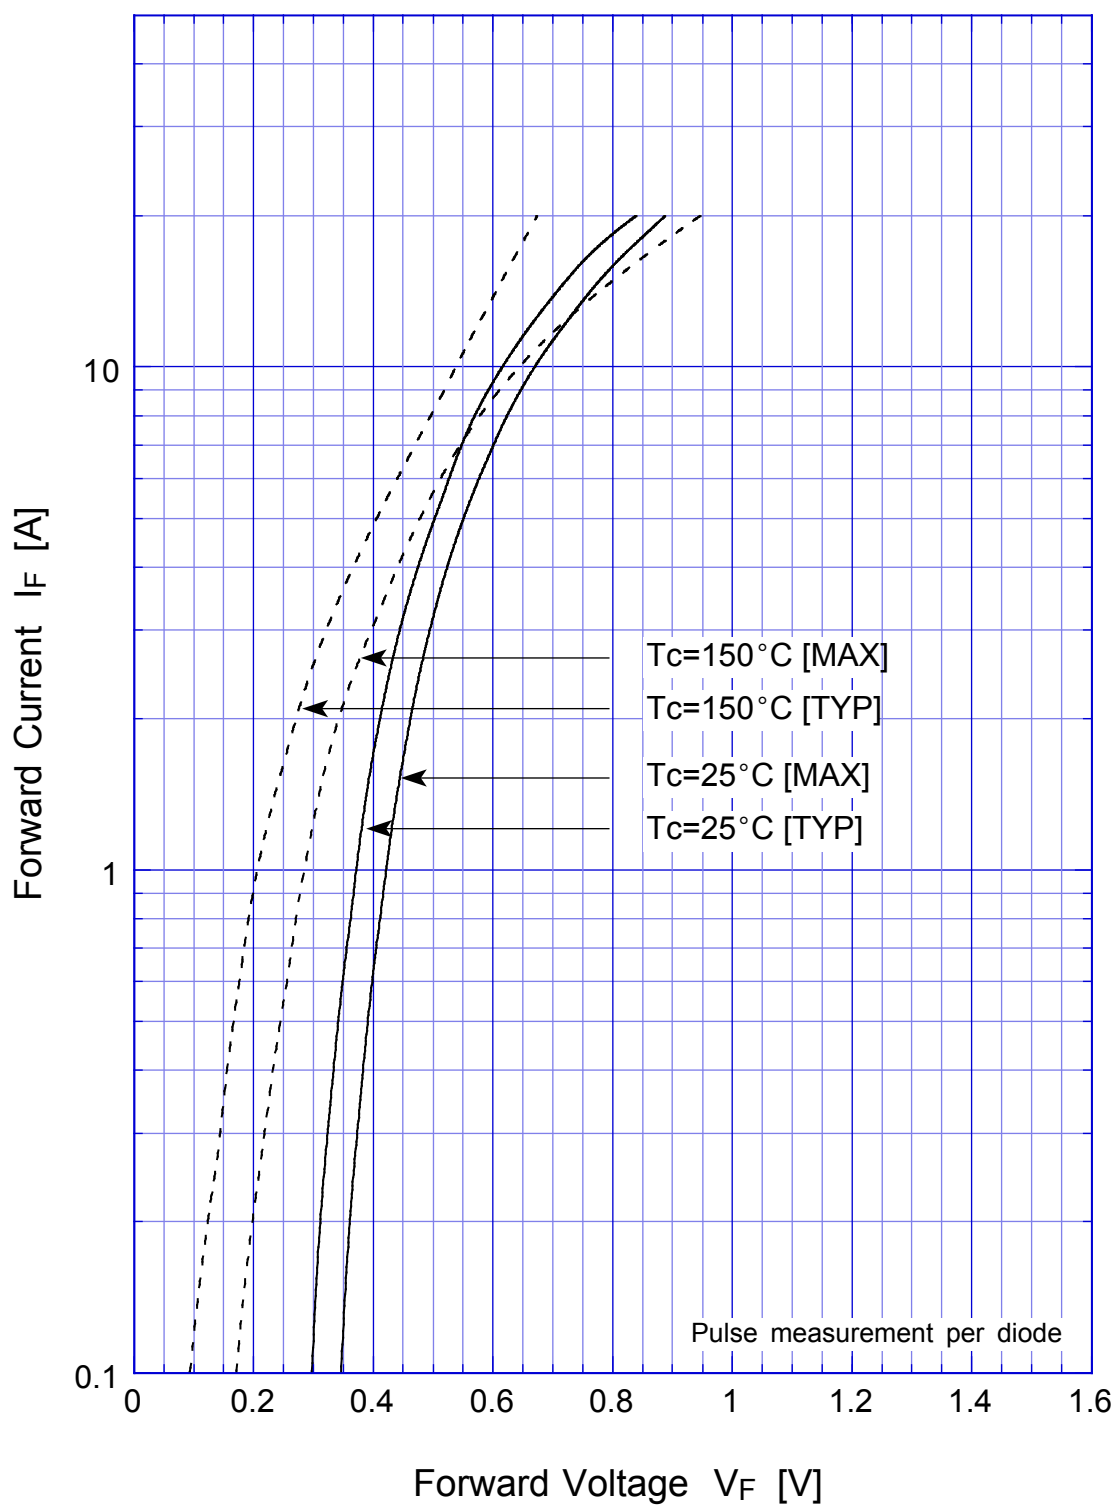


# DF10SC4M Junction Capacitance

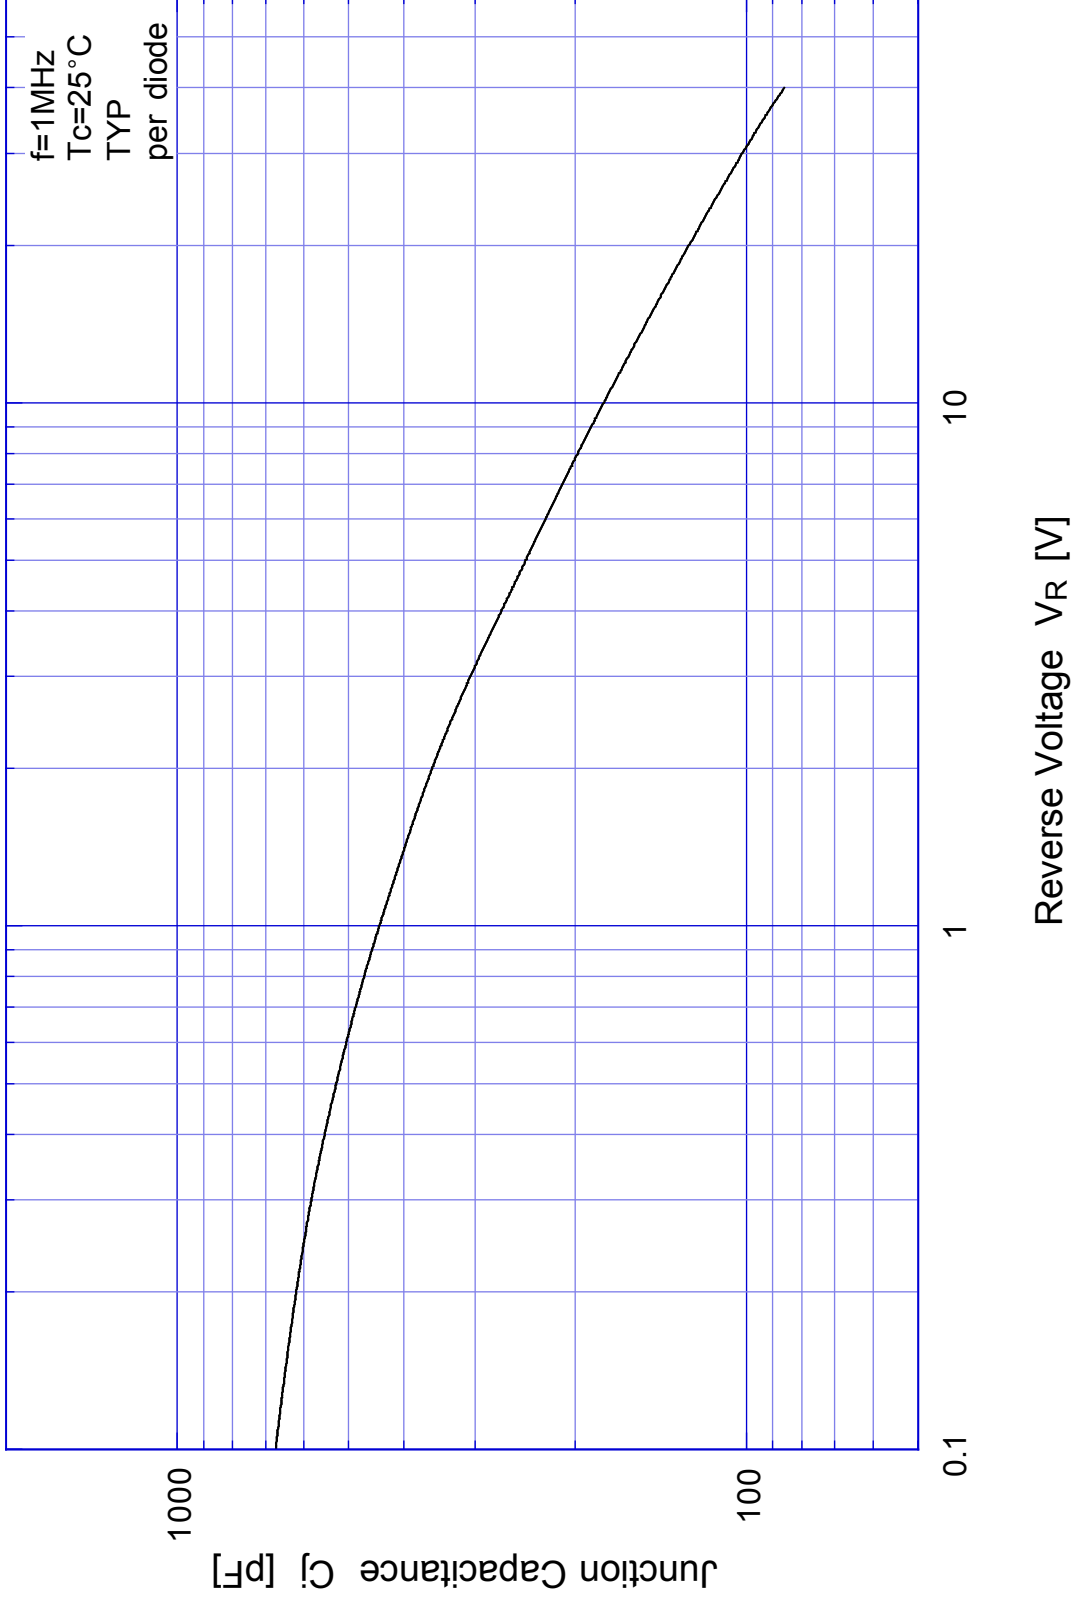


# DF10SC4M Reverse Current

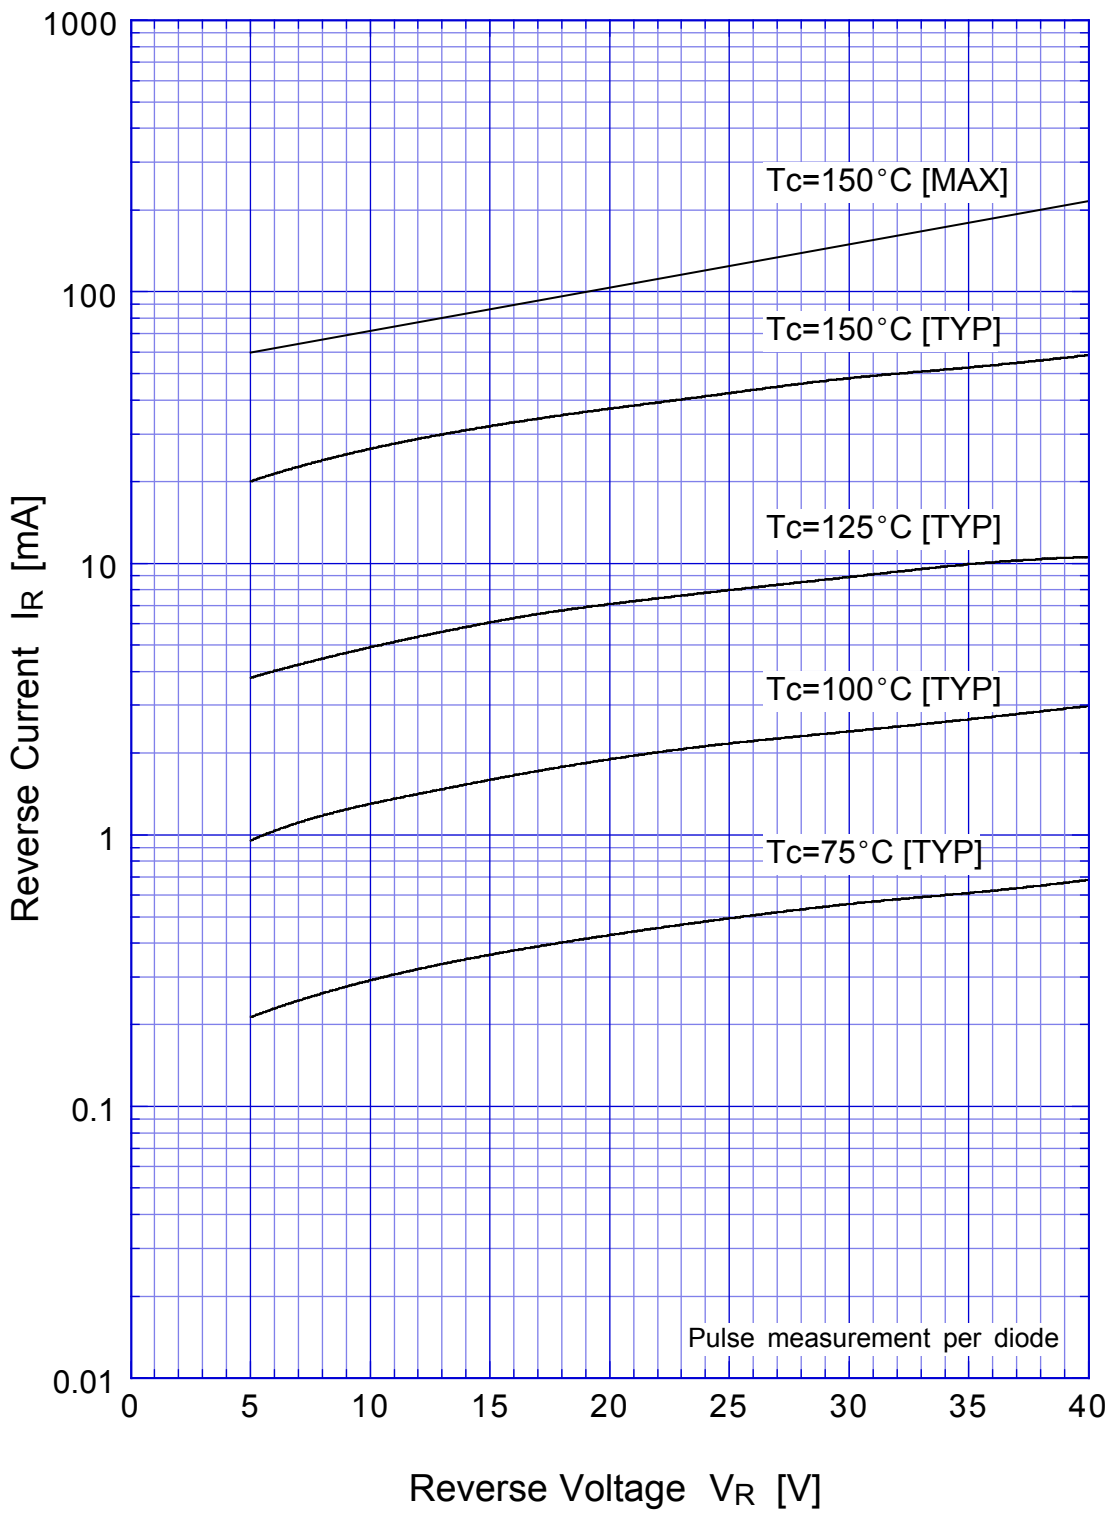


# DF10SC4M Reverse Power Dissipation

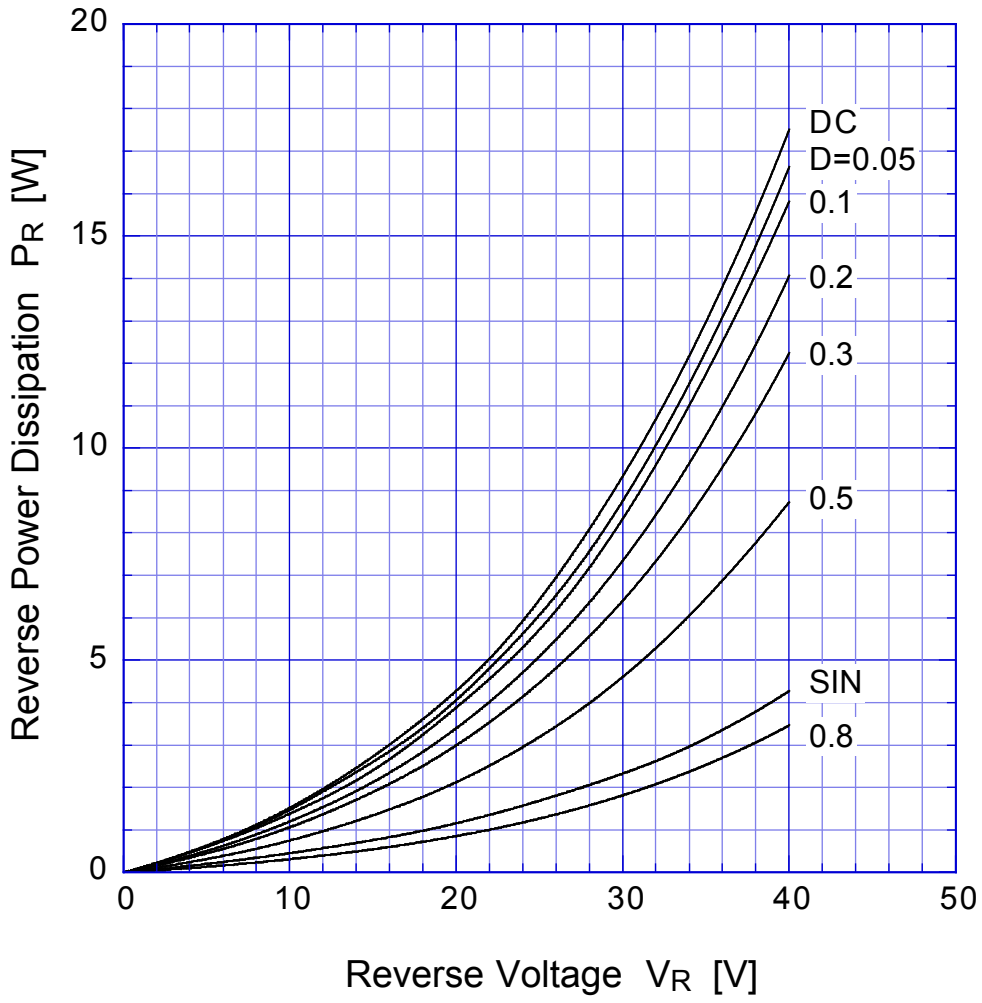


$T_j = 150^\circ\text{C}$

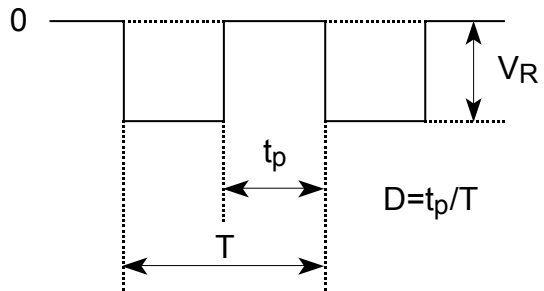

# DF10SC4M Forward Power Dissipation

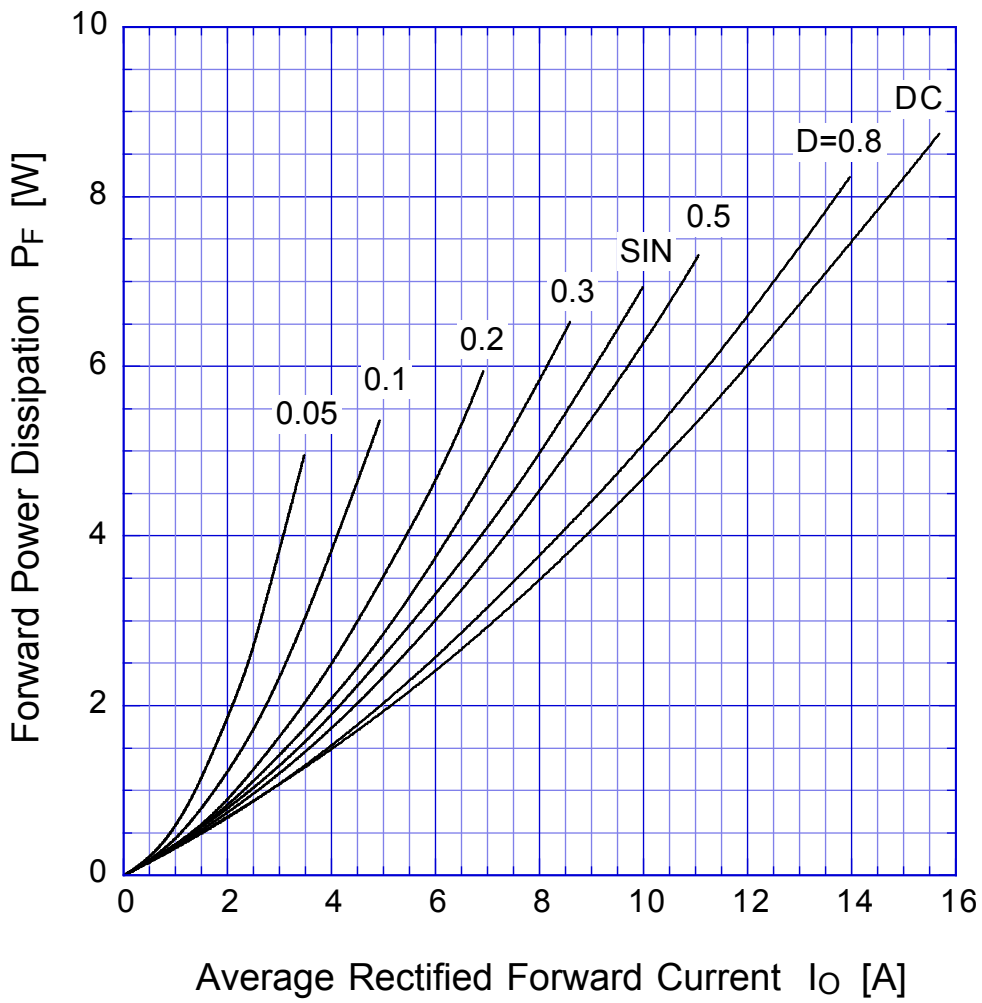


$T_j = 150^\circ\text{C}$

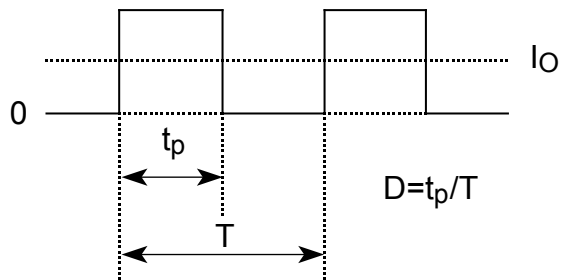


# DF10SC4M

## Derating Curve

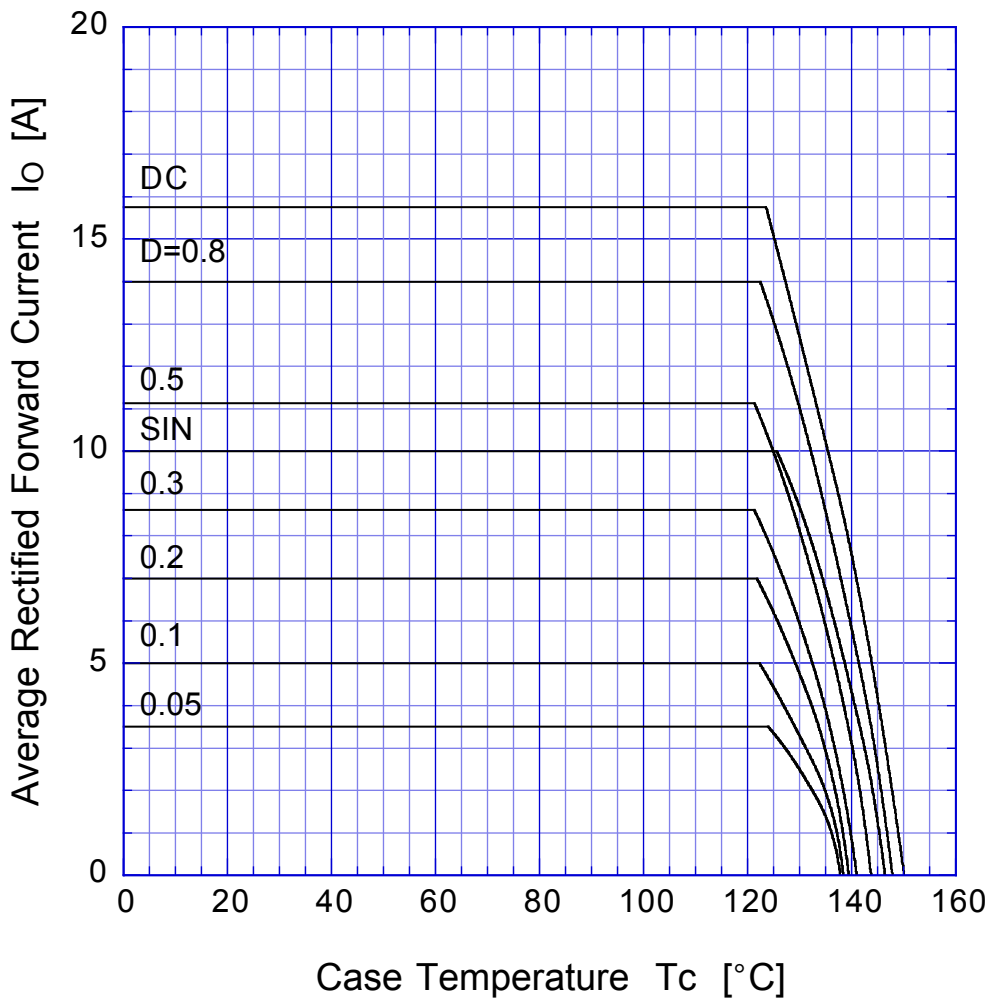


$V_R = 20V$

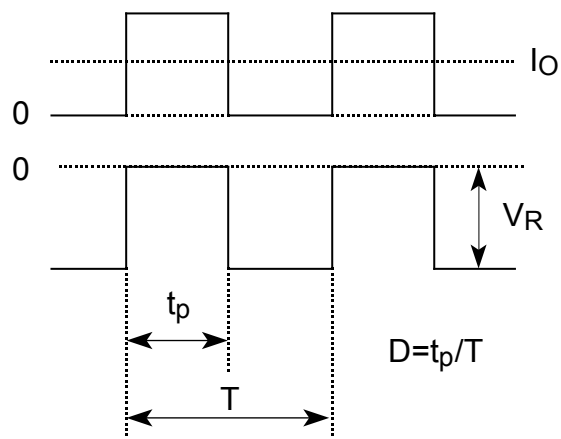

# DF10SC4M

# Derating Curve

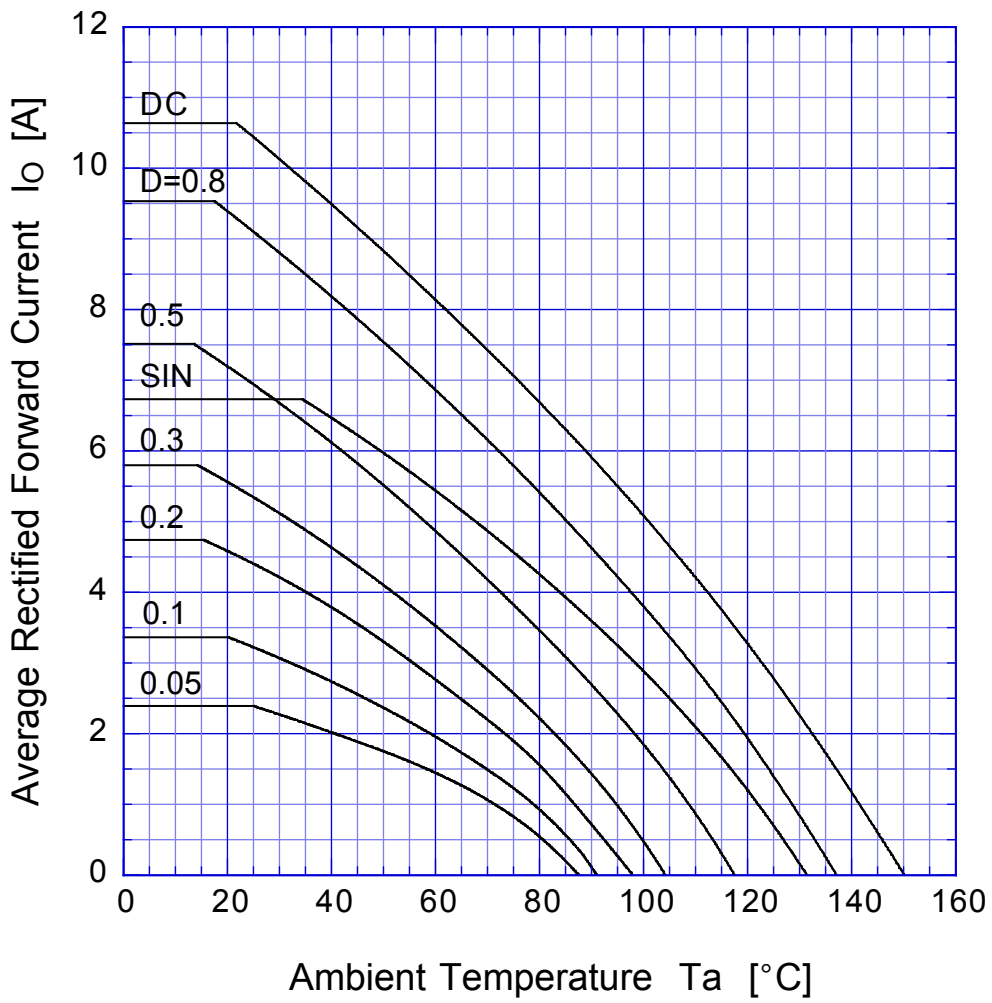


$V_R = 15V$





# DF10SC4M Peak Surge Forward Capability

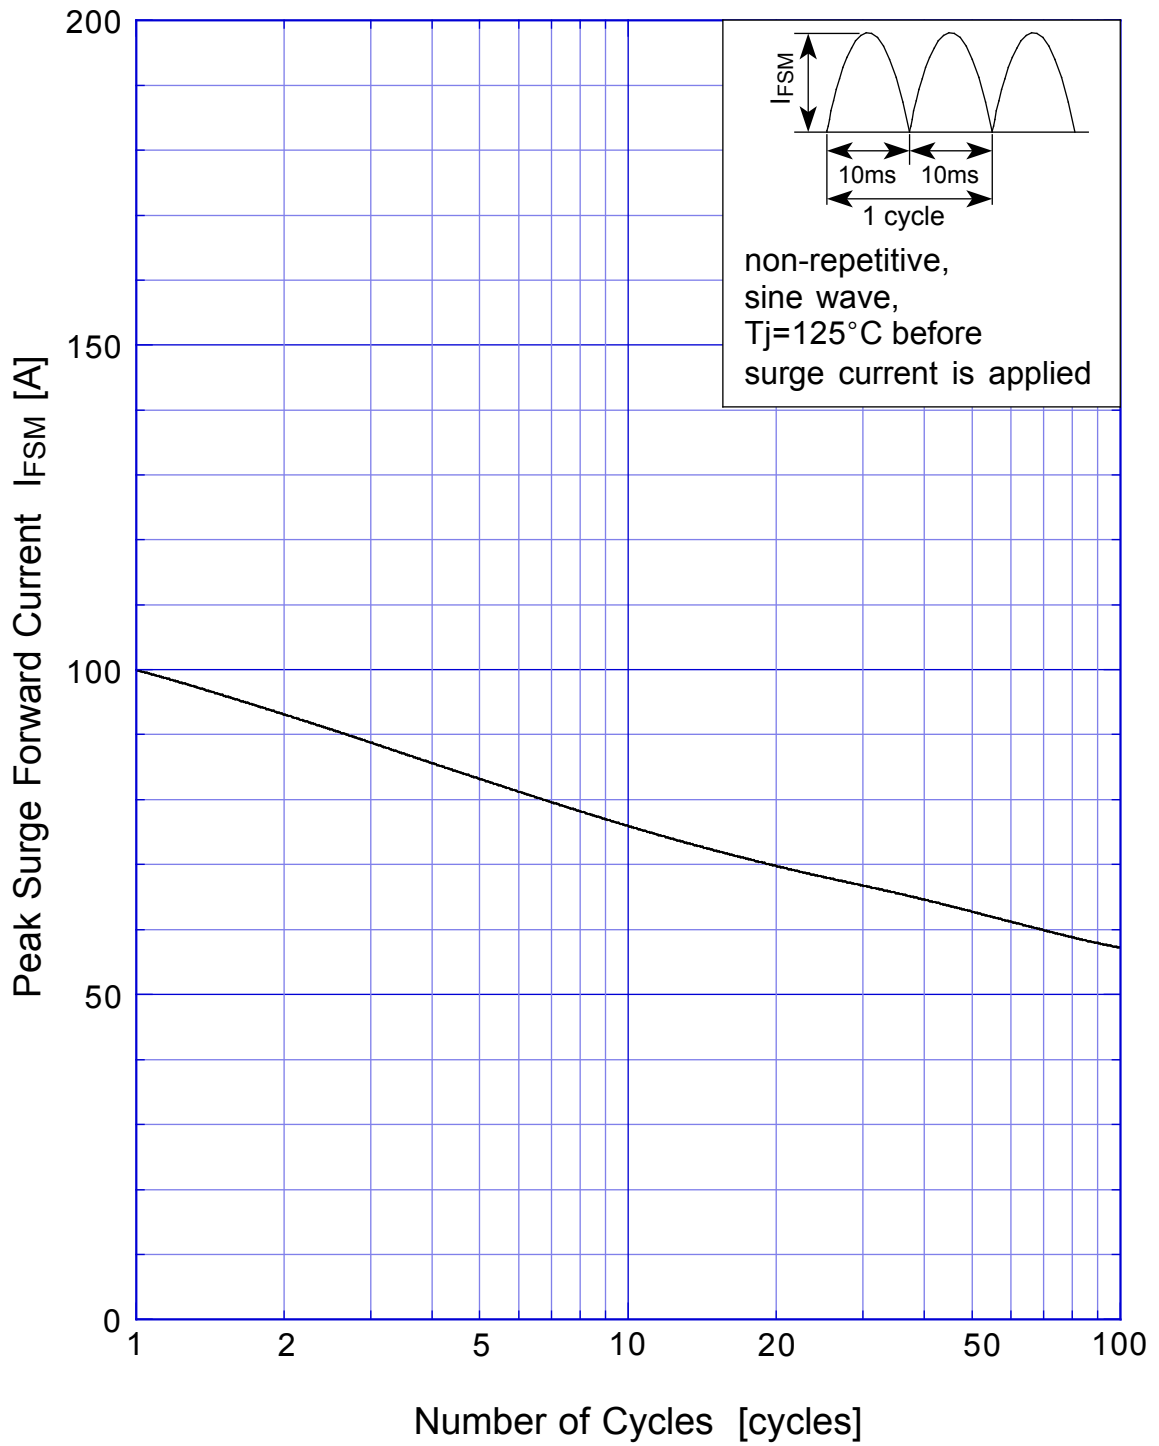

# SBD Repetitive Surge Reverse Power Derating Curve



# SBD

## Repetitive Surge Reverse Power Capability

