

TOSHIBA TRANSISTOR SILICON PNP EPITAXIAL TYPE (PCT PROCESS)

# 2SA970


LOW NOISE AUDIO AMPLIFIER APPLICATIONS

Unit in mm

- Low Noise  
 : NF=3dB (Typ.)  $R_G=100\Omega$ ,  $V_{CE}=-6V$ ,  $I_C=-100\mu A$ ,  $f=1kHz$   
 : NF=0.5dB (Typ.)  $R_G=1k\Omega$ ,  $V_{CE}=-6V$ ,  $I_C=-100\mu A$ ,  $f=1kHz$
- High DC Current Gain :  $h_{FE}=200\sim 700$
- High Breakdown Voltage :  $V_{CEO}=-120V$
- Low Pulse Noise. Low 1/f Noise

MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-120	V
Collector-Emitter Voltage	$V_{CEO}$	-120	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Base Current	$I_B$	-20	mA
Collector Power Dissipation	$P_C$	300	mW
Junction Temperature	$T_j$	125	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55~125	$^\circ C$

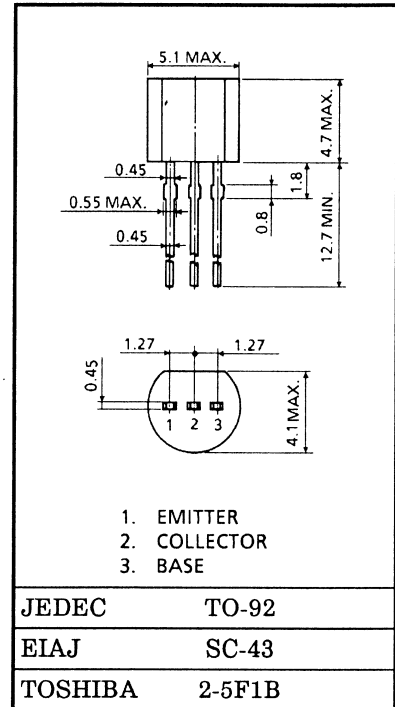

Weight : 0.21g

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-120V$ , $I_E=0$	—	—	-0.1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-5V$ , $I_C=0$	—	—	-0.1	$\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-1mA$ , $I_B=0$	-120	—	—	V
DC Current Gain	$h_{FE}$ (Note)	$V_{CE}=-6V$ , $I_C=-2mA$	200	—	700	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-10mA$ , $I_B=-1mA$	—	—	-0.3	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=-6V$ , $I_C=-2mA$	—	0.65	—	V
Transition Frequency	$f_T$	$V_{CE}=-6V$ , $I_C=-1mA$	—	100	—	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=-10V$ , $I_E=0$ , $f=1MHz$	—	4.0	—	pF
Noise Figure	NF	$V_{CE}=-6V$ , $I_C=-0.1mA$ , $f=10Hz$ , $R_G=10k\Omega$	—	—	6	dB
		$V_{CE}=-6V$ , $I_C=-0.1mA$ , $f=1kHz$ , $R_G=10k\Omega$	—	—	2	
		$V_{CE}=-6V$ , $I_C=-0.1mA$ , $f=1kHz$ , $R_G=100\Omega$	—	3	—	

Note :  $h_{FE}$  Classification GR : 200~400, BL : 350~700

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.