



**MEDIUM SPEED SWITCHING  
RESISTOR BUILT-IN TYPE NPN TRANSISTOR**

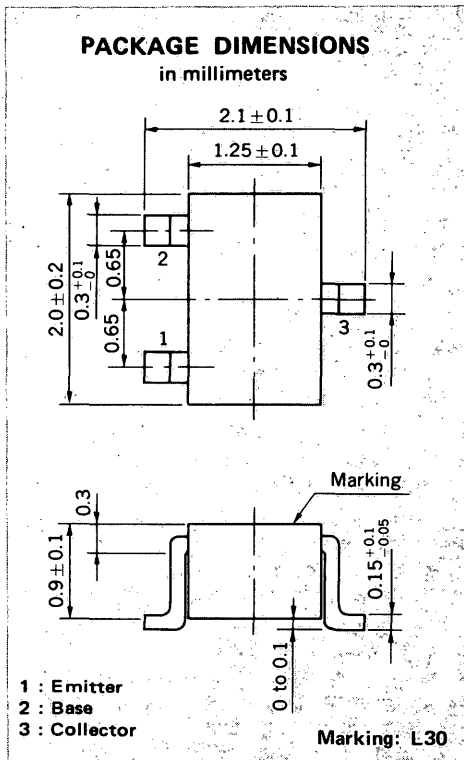

**FEATURES**

- Resistors Built-in TYPE

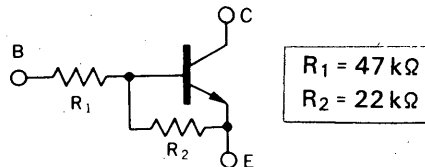

- Complementary to GN1L4L

**ABSOLUTE MAXIMUM RATINGS**

Maximum Voltages and Currents ( $T_a = 25^\circ\text{C}$ )

|                              |           |     |    |
|------------------------------|-----------|-----|----|
| Collector to Base Voltage    | $V_{CB0}$ | 60  | V  |
| Collector to Emitter Voltage | $V_{CE0}$ | 50  | V  |
| Emitter to Base Voltage      | $V_{EB0}$ | 15  | V  |
| Collector Current (DC)       | $I_C$     | 100 | mA |
| Collector Current (Pulse)    | $I_C$     | 200 | mA |

Maximum Power Dissipation

|  |       |     |    |
|--|-------|-----|----|
| Total Power Dissipation<br>at $25^\circ\text{C}$ Ambient Temperature | $P_T$ | 150 | mW |
|--|-------|-----|----|

Maximum Temperatures

|                           |           |             |                  |
|---------------------------|-----------|-------------|------------------|
| Junction Temperature      | $T_j$     | 150         | $^\circ\text{C}$ |
| Storage Temperature Range | $T_{stg}$ | -55 to +150 | $^\circ\text{C}$ |

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )**

| CHARACTERISTIC               | SYMBOL          | MIN. | TYP. | MAX. | UNIT             | TEST CONDITIONS   |
|------------------------------|-----------------|------|------|------|------------------|---|
| Collector Cutoff Current     | $I_{CB0}$       |      |      | 100  | nA               | $V_{CB} = 50\text{ V}, I_E = 0$                         |
| DC Current Gain              | $h_{FE1}^*$     | 60   | 120  | 195  |                  | $V_{CE} = 5.0\text{ V}, I_C = 5.0\text{ mA}$            |
| DC Current Gain              | $h_{FE2}^*$     | 90   | 340  |      |                  | $V_{CE} = 5.0\text{ V}, I_C = 50\text{ mA}$             |
| Collector Saturation Voltage | $V_{CE(sat)}^*$ |      | 0.04 | 0.2  | V                | $I_C = 5.0\text{ mA}, I_B = 0.25\text{ mA}$             |
| Low-Level Input Voltage      | $V_{IL}^*$      |      | 1.7  | 0.9  | V                | $V_{CE} = 5.0\text{ V}, I_C = 100\text{ }\mu\text{A}$   |
| High-Level Input Voltage     | $V_{IH}^*$      | 6.0  | 2.5  |      | V                | $V_{CE} = 0.2\text{ V}, I_C = 5.0\text{ mA}$            |
| Input Resistor               | $R_1$           | 32.9 | 47.0 | 61.1 | $\text{k}\Omega$ |   |
| E-B Resistor                 | $R_2$           | 15.4 | 22.0 | 28.6 | $\text{k}\Omega$ |   |
| Turn-on Time                 | $t_{on}$        |      | 0.38 | 1.0  | $\mu\text{s}$    | $V_{CC} = 5\text{ V}, V_{in} = 5\text{ V}$              |
| Storage Time                 | $t_{stg}$       |      | 1.2  | 3.0  | $\mu\text{s}$    | $R_L = 1\text{ k}\Omega$                                |
| Turn-off Time                | $t_{off}$       |      | 1.6  | 5.0  | $\mu\text{s}$    | $PW = 2\text{ }\mu\text{s}, \text{Duty Cycle} \leq 2\%$ |

\* Pulsed:  $PW \leq 350\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2\%$

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

