



## 4-BIT MAGNITUDE COMPARATOR

The HEF4585B is a 4-bit magnitude comparator which compares two 4-bit words (A and B), whether they are 'less than', 'equal to', or 'greater than'. Each word has four parallel inputs ( $A_0$  to  $A_3$  and  $B_0$  to  $B_3$ );  $A_3$  and  $B_3$  being the most significant inputs. Three outputs are provided; A greater than B ( $O_{A > B}$ ), A less than B ( $O_{A < B}$ ) and A equal to B ( $O_{A = B}$ ). Three expander inputs ( $I_{A > B}$ ,  $I_{A < B}$  and  $I_{A = B}$ ) allow cascading of the devices without external gates.

For proper compare operation the expander inputs to the least significant position must be connected as follows:  $I_{A = B} = I_{A > B} = \text{HIGH}$ ,  $I_{A < B} = \text{LOW}$ . For words greater than 4-bits, units can be cascaded by connecting outputs  $O_{A < B}$  and  $O_{A = B}$  to the corresponding inputs of the next significant comparator (input  $I_{A > B}$  is connected to a HIGH).

Operation is not restricted to binary codes, the devices will work with any monotonic code. The function table describes the operation of the device under all possible logic conditions.

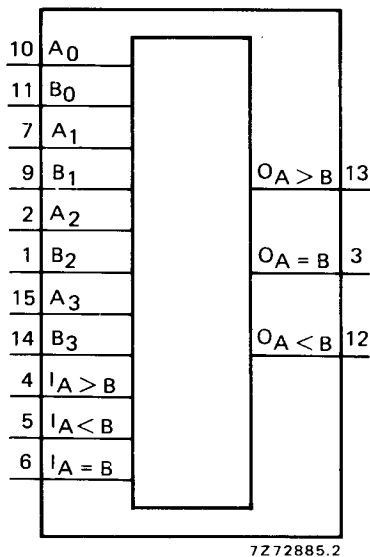


Fig. 1 Functional diagram.

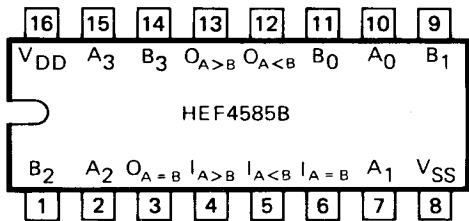


Fig. 2 Pinning diagram.

HEF4585BP : 16-lead DIL; plastic (SOT-38Z).  
HEF4585BD : 16-lead DIL; ceramic (cerdip) (SOT-74).  
HEF4585BT : 16-lead mini-pack; plastic (SO-16; SOT-109A).


### PINNING

$A_0$ to $A_3$	word A parallel inputs
$B_0$ to $B_3$	word B parallel inputs
$I_{A > B}$ , $I_{A < B}$ , $I_{A = B}$	expander inputs
$O_{A > B}$	A greater than B output
$O_{A < B}$	A less than B output
$O_{A = B}$	A equal to B output

### FAMILY DATA

$I_{DD}$  LIMITS category MSI

} see Family Specifications

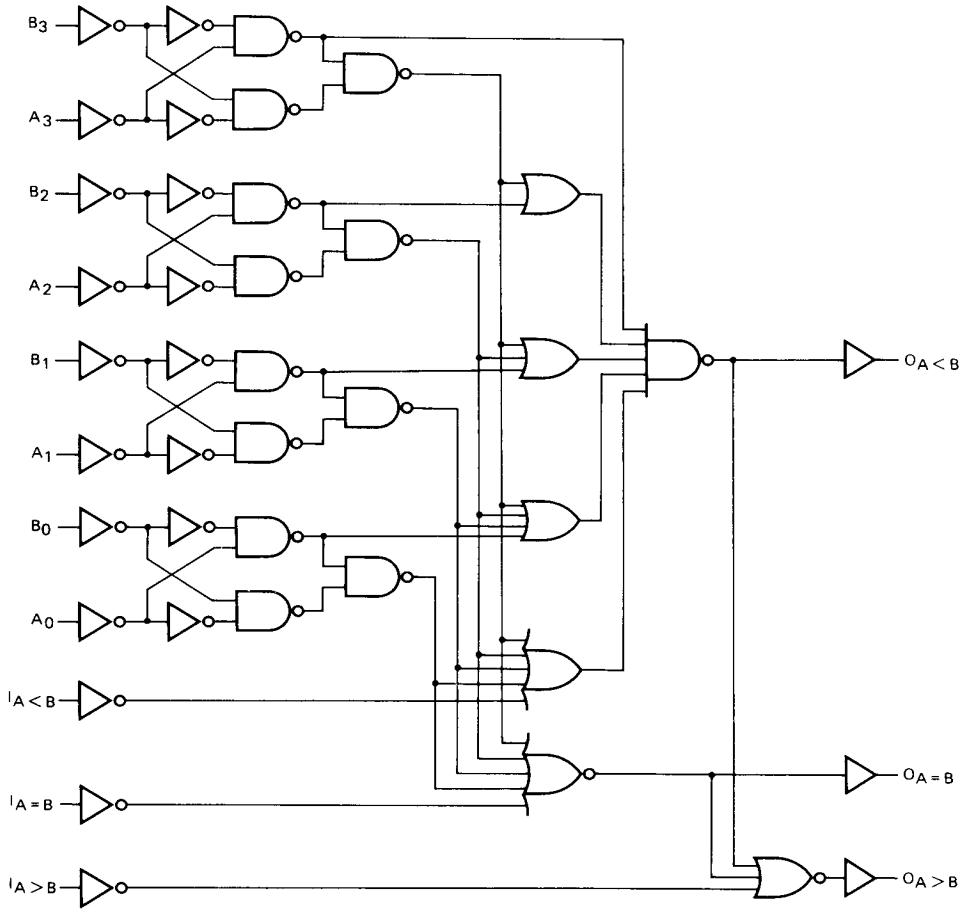

7274596.1

Fig. 3 Logic diagram.

FUNCTION TABLE

comparing inputs				cascading inputs			outputs		
A <sub>3</sub> , B <sub>3</sub>	A <sub>2</sub> , B <sub>2</sub>	A <sub>1</sub> , B <sub>1</sub>	A <sub>0</sub> , B <sub>0</sub>	I <sub>A</sub> > B	I <sub>A</sub> < B	I <sub>A</sub> = B	O <sub>A</sub> > B	O <sub>A</sub> < B	O <sub>A</sub> = B
A <sub>3</sub> > B <sub>3</sub>	X	X	X	H	X	X	H	L	L
A <sub>3</sub> < B <sub>3</sub>	X	X	X	X	X	X	L	H	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> > B <sub>2</sub>	X	X	H	X	X	H	L	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> < B <sub>2</sub>	X	X	X	X	X	L	H	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> > B <sub>1</sub>	X	H	X	X	H	L	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> < B <sub>1</sub>	X	X	X	X	L	H	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> > B <sub>0</sub>	H	X	X	H	L	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> < B <sub>0</sub>	X	X	X	L	H	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> = B <sub>0</sub>	X	L	H	L	L	H
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> = B <sub>0</sub>	H	L	L	H	L	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> = B <sub>0</sub>	X	H	L	L	H	L
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> = B <sub>0</sub>	X	H	H	L	H	H
A <sub>3</sub> = B <sub>3</sub>	A <sub>2</sub> = B <sub>2</sub>	A <sub>1</sub> = B <sub>1</sub>	A <sub>0</sub> = B <sub>0</sub>	L	L	L	L	L	L

H = HIGH state (the more positive voltage)

L = LOW state (the less positive voltage)

X = state is immaterial

The upper 11 lines describe the normal operation under all conditions that will occur in a single device or in a serial expansion scheme.

The lower 2 lines describe the operation under abnormal conditions on the cascading inputs. These conditions occur when the parallel expansion technique is used.

## A.C. CHARACTERISTICS

$V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$ ;  $C_L = 50\text{ pF}$ ; input transition times  $\leq 20\text{ ns}$

	$V_{DD}$ V	symbol	min.	typ.	max.	typical extrapolation formula
Propagation delays $A_n, B_n \rightarrow O_n$ HIGH to LOW	5	tPHL		160	320 ns	$133\text{ ns} + (0,55\text{ ns/pF}) C_L$
	10		65	130 ns	$54\text{ ns} + (0,23\text{ ns/pF}) C_L$	
	15		45	90 ns	$37\text{ ns} + (0,16\text{ ns/pF}) C_L$	
LOW to HIGH	5	tPLH		150	300 ns	$123\text{ ns} + (0,55\text{ ns/pF}) C_L$
	10		60	120 ns	$49\text{ ns} + (0,23\text{ ns/pF}) C_L$	
	15		45	90 ns	$37\text{ ns} + (0,16\text{ ns/pF}) C_L$	
$I_n \rightarrow O_n$ HIGH to LOW	5	tPHL		110	220 ns	$83\text{ ns} + (0,55\text{ ns/pF}) C_L$
	10		45	90 ns	$34\text{ ns} + (0,23\text{ ns/pF}) C_L$	
	15		30	60 ns	$22\text{ ns} + (0,16\text{ ns/pF}) C_L$	
LOW to HIGH	5	tPLH		120	240 ns	$93\text{ ns} + (0,55\text{ ns/pF}) C_L$
	10		50	100 ns	$39\text{ ns} + (0,23\text{ ns/pF}) C_L$	
	15		35	70 ns	$27\text{ ns} + (0,16\text{ ns/pF}) C_L$	
Output transition times HIGH to LOW	5	tTHL		60	120 ns	$10\text{ ns} + (1,0\text{ ns/pF}) C_L$
	10		30	60 ns	$9\text{ ns} + (0,42\text{ ns/pF}) C_L$	
	15		20	40 ns	$6\text{ ns} + (0,28\text{ ns/pF}) C_L$	
LOW to HIGH	5	tTLH		60	120 ns	$10\text{ ns} + (1,0\text{ ns/pF}) C_L$
	10		30	60 ns	$9\text{ ns} + (0,42\text{ ns/pF}) C_L$	
	15		20	40 ns	$6\text{ ns} + (0,28\text{ ns/pF}) C_L$	

	$V_{DD}$ V	typical formula for P ( $\mu\text{W}$ )	where $f_i$ = input freq. (MHz) $f_o$ = output freq. (MHz) $C_L$ = load capacitance (pF) $\Sigma(f_o C_L)$ = sum of outputs $V_{DD}$ = supply voltage (V)
Dynamic power dissipation per package (P)	5	$1250 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	
	10	$5500 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	
	15	$15\,000 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	

## APPLICATION INFORMATION

Some examples of applications for the HEF4585B are:

- Process controllers.
- Servo-motor control.

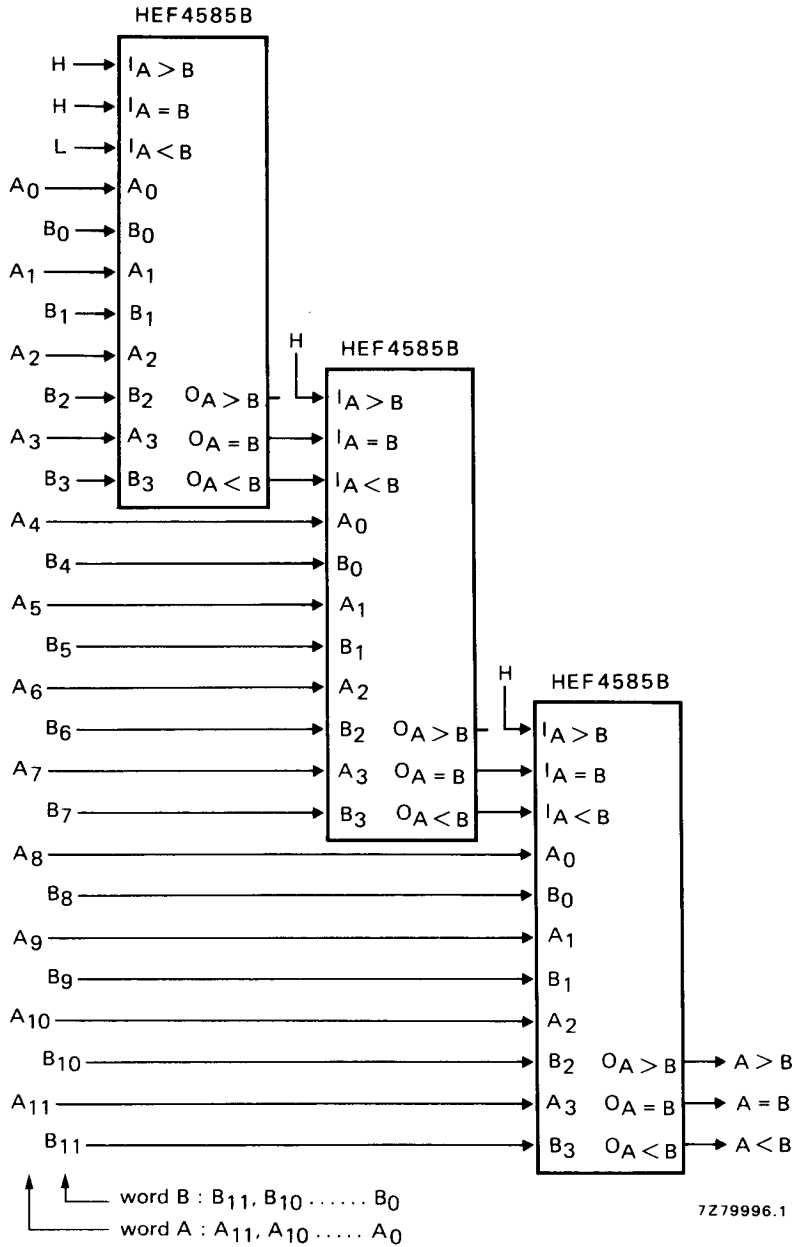


Fig. 4 Example of cascading comparators.