

## MULTI-PURPOSE REMOTE CONTROL TRANSMITTER IC CMOS LSI

### DESCRIPTION


The  $\mu$ PD6123 is intended for applications in infrared remote control transmitters for controlling TV, VCR, stereo components, cassette decks, airconditioners, and other appliance.

It consists of a 1 k step ROM (10 bits/step), 32 word RAM (5 bits/word), 4 bit parallel processing ALU, programmable timer, key input/output ports, and a transmission/output port. The remote-control transmitter functions can be programmed.

### FEATURES

- Programmable infrared remote-control transmitter
- 19 instructions
- Instruction cycle  
17.6  $\mu$ s/455 kHz (ceramic resonator)
- Program memory (ROM) size  
1 024 x 10 bits
- Data memory (RAM) size  
32 x 5 bits
- Programmable timer (9 bits)
- I/O: 5 pins  
Input: 4 pins
- Send carrier frequency  
 $f_{osc}/12$ ,  $f_{osc}/8$
- Standby operation (HALT)
- Ceramic oscillation circuit for system clock
- CMOS
- Low power consumption
- Low operating voltage (2.0 V to 6.0 V)

### PINNING DIAGRAM (Top View)

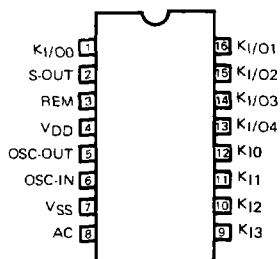

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Supply voltage	$V_{DD}$	7.0	V
Input voltage	$V_{IN}$	-0.3 to $V_{DD} + 0.3$	V
Operating temperature	$T_{opt}$	-20 to + 75	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$


RECOMMENDED OPERATING CONDITIONS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage	$V_{DD}$	2.0		6.0	V
Oscillation frequency	$f_{OSC}$	400		500	kHz

ELECTRICAL CHARACTERISTICS ( $V_{DD} = 3.0\text{ V}$ ,  $f_{OSC} = 455\text{ kHz}$ ,  $T_a = 25^\circ\text{C}$ )

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Supply voltage	$V_{DD}$	2.0		6.0	V	
Current consumption 1	$I_{DD1}$		0.3	1.0	mA	$f_{OSC} = 455\text{ kHz}$
Current consumption 2	$I_{DD2}$			1.0	$\mu\text{A}$	$f_{OSC} = \text{STOP}$
REM high-level output current	$I_{OH1}$	-5	-8		mA	$V_O = 1.0\text{ V}$
REM low-level output current	$I_{OL1}$	0.5	1.5	2.5	mA	$V_O = 0.3\text{ V}$
S-OUT high-level output current	$I_{OH2}$	-0.3	-1.0	-2.0	mA	$V_O = 2.7\text{ V}$
S-OUT low-level output current	$I_{OL2}$	1	1.5		mA	$V_O = 0.3\text{ V}$
$K_I$ high-level input current	$I_{IH1}$	10		30	$\mu\text{A}$	$V_I = V_{DD}$
$K_I$ high-level input current	$I_{IH1}'$			0.2	$\mu\text{A}$	$V_I = V_{DD}$ (without pull-down resistor)
$K_I$ low-level input current	$I_{IL1}$			-0.2	$\mu\text{A}$	$V_I = V_{SS}$
$K_{I/O}$ high-level input current	$I_{IH2}$	10		30	$\mu\text{A}$	$V_I = V_{DD}$
$K_{I/O}$ high-level input current	$I_{IH2}'$			0.2	$\mu\text{A}$	$V_I = V_{DD}$ (without pull-down resistor)
$K_{I/O}$ low-level input current	$I_{IL2}$			-0.2	$\mu\text{A}$	$V_I = V_{SS}$
$K_{I/O}$ high-level output current	$I_{OH3}$	-1.5	-2.0	-4.0	mA	$V_O = 2.5\text{ V}$
$K_{I/O}$ low-level output current	$I_{OL3}$	25	50	100	$\mu\text{A}$	$V_O = 2.1\text{ V}$
$K_I$ high-level input voltage	$V_{IH1}$	0.7 $V_{DD}$		$V_{DD}$	V	
$K_I$ low-level input voltage	$V_{IL1}$	$V_{SS}$		0.3 $V_{DD}$	V	$V_I = V_{DD}$
$K_{I/O}$ high-level input voltage	$V_{IH2}$	1.3			V	
$K_{I/O}$ low-level input voltage	$V_{IL2}$			0.4	V	
AC pin pull up resistance	$R_1$	0.3		3.0	k $\Omega$	$V_I = V_{SS}$
AC pin pull down resistance	$R_2$	150	400	1500	k $\Omega$	$V_I = 2.7\text{ V}$

## BLOCK DIAGRAM

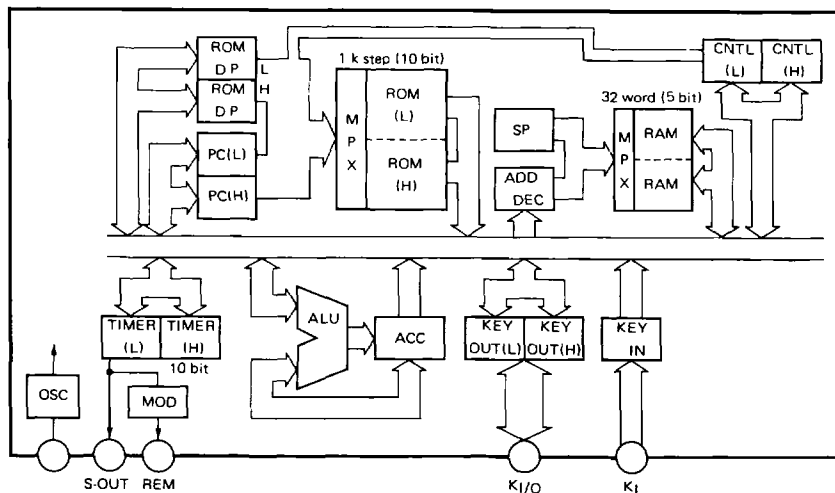

## 1. INTERNAL BLOCK FUNCTIONS

### 1.1 PROGRAM COUNTER (PC) ... 10 bits

This is a 10 bit binary counter for setting the 10 bit address information of the program memory.




Fig. 1.1 Program counter configuration

Each time an instruction is executed, the program counter is automatically incremented by the number of bytes of the instruction.

When a jump instruction (JMPD, JC, JF) is executed, the program counter indicates the jump destination. The immediate data or data memory contents are loaded into some or all bits of the program counter.

When a call instruction (CALLD) is executed, the program counter contents are incremented and saved in the stack memory. Then, values required for each jump instruction are loaded. When a return instruction (RET) is executed, the stack memory contents are loaded into the program counter.

When an all clear command is input, the program counter is initialized to 000.


### 1.2 STACK POINTER (SP) ... 2 bits

This is a 2-bit register storing the stack area starting address, when the data memory is used as a stack memory.

The stack pointer is incremented when a call instruction (CALLD) is executed and decremented when a return instruction (RET) is executed.

The stack pointer is initialized to 00<sub>h</sub> after all-clear operation, and sets the most significant address (F<sub>H</sub>) of the data memory.

The relationship between stack pointers and data memory area are as follows:

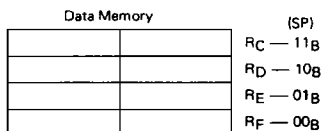

When a stack pointer overflows, it is assumed that the CPU ran out of control and the program counter is initialized to 000.

### 1.3 PROGRAM MEMORY (ROM) ··· 1 024 steps x 10 bits

This is a mask programmable ROM (1 024 steps x 10 bits) addressed by the program counter.

The program memory stores a program, table data, and so forth.

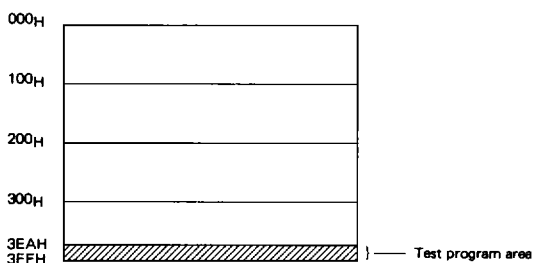


Fig. 1.2 Program memory map

The program memory address is 000H-3FFH.

Users cannot use the test program area.

### 1.4 DATA MEMORY (RAM) ··· 32 words x 5 bits

This is a static RAM (32 word x 5 bits) used for storing processing data. The data memory may be handled in 8 bit units. R<sub>0</sub> can be used as the ROM data pointer.

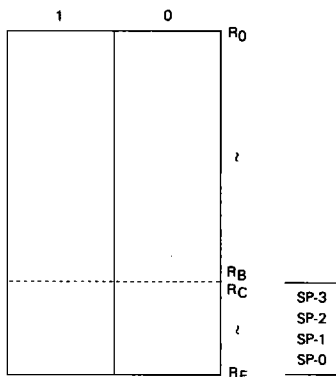


Fig. 1.3 Data memory configuration

## 1.5 DATA POINTER ( $R_0$ )

$R_0$  ( $R_{10}$ ,  $R_{00}$ ) of the data memory can be used as a ROM data pointer.

$R_0$  specifies eight lower bits of the ROM address, and the two upper bits are specified by the control register.

Setting a ROM address in the data pointer will facilitate reference of a ROM data table.




Fig. 1.4 Data pointer configuration

## 1.6 ACCUMULATOR (A) ... 4 bits

The accumulator is a 4-bit register used for various operations.




Fig. 1.5 Accumulator configuration

## 1.7 ARITHMETIC LOGIC UNIT (ALU) ... 4 bits

The arithmetic logic unit is a 4-bit operation circuit used for simple processing such as logical operations.

## 1.8 FLAG

### (1) Status flag

If the port status checked by an STTS instruction matches the condition specified by this instruction, the status flag (F) is set (to 1).

### (2) Carry flag

If the accumulator's MSB causes carry when an INC (increment) or RL (rotate shift) instruction is executed, the carry flag (C) is set (to 1).

If the accumulator contents indicate  $F_H$  when a SCAF instruction is executed, the carry flag (C) is set (to 1).

## 1.9 SYSTEM CLOCK GENERATION CIRCUIT

The system clock generation circuit is comprised of a ceramic vibrator (400 to 500 kHz) oscillator.

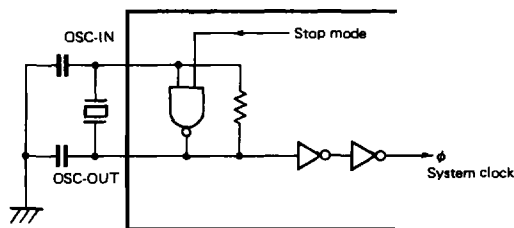


Fig. 1.6 System clock generation circuit

The system clock generation circuit stops the oscillator (system clock  $\phi$ ) in the stop mode.

## 1.10 TIMER

The timer decides transmission output pattern. The timer consists of the 9 bit down-counter block and the 1 bit register to decide whether carrier pulses are output or not. (10 bits in total)

The 9 bit down-counter decrements by 1 every instruction execution ( $8/f_{OSC}$ ) at the timer run mode. When the 9 bit down-counter value becomes 000, the timer operation stops and halt reset signal is out. If CPU operation state is the HALT TIMER mode (waiting for timer up), the halt mode is reset and next instruction is operated.


The count down time is decided by the following expression (set up value (HEX) + 1)  $\times$  8/ $f_{OSC}$ . This value is set by timer operation instructions. (MOV T<sub>1</sub>, A, MOV T<sub>1</sub>, #data . . .)

According to the MSB register value, the REM output signal is selected whether carrier pulses or low level. When the MSB is 1, carrier pulses ( $f_{OSC}/12$  or  $f_{OSC}/8$ ) are output until the 9 bit down-counter value goes to 000. When the MSB is 0, the REM output level is low.

At the S-OUT pin the MSB inverted level is output. When carrier pulses are output at the REM output, the S-OUT output level is low. When carrier pulses are not output from the REM output, the S-OUT output level is high.

The **OSCILLATION STOP HALT** instruction is not executed until the 9 bit down-counter value becomes 000. If the **HALT** reset condition is match during the timer running, **HALT** mode is reset immediately then the next instruction is executed.

The timer start/stop is controlled by the control register (P<sub>1</sub>). (See the explanation of the control register)

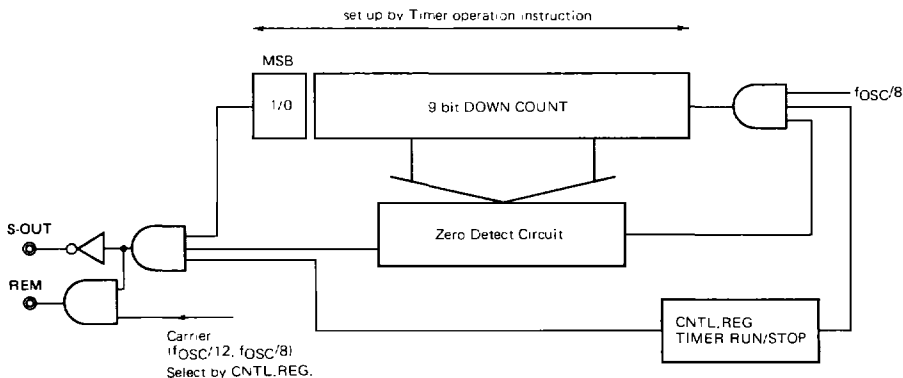

**Fig. 1.7 Timer block configuration**

## 1.11 $K_{I/O}$ PORT ( $P_0$ )

This is an 8 bit port for key scan output. When the control register ( $P_1$ ) is set in the input mode, this port can be used as an 8 bit input port. In this case, all pins are pulled down to the  $V_{SS}$  level.

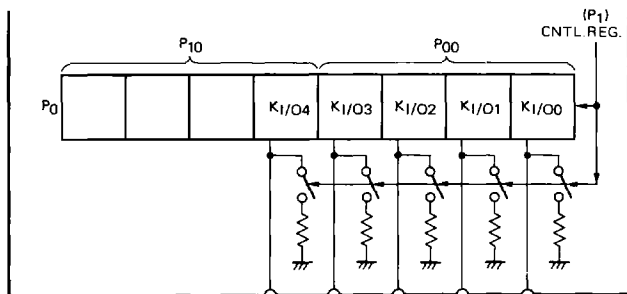


Fig. 1.8  $K_{I/O}$  port configuration

## 1.12 $K_I$ PORT ( $P_{12}$ )

This is a 4 bit input port for key input. All pins are pulled down to the  $V_{SS}$  level.


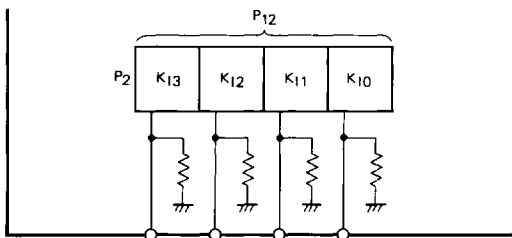



Fig. 1.9  $K_I$  port configuration

## 1.13 $K_{I/O}$ pull down resistors

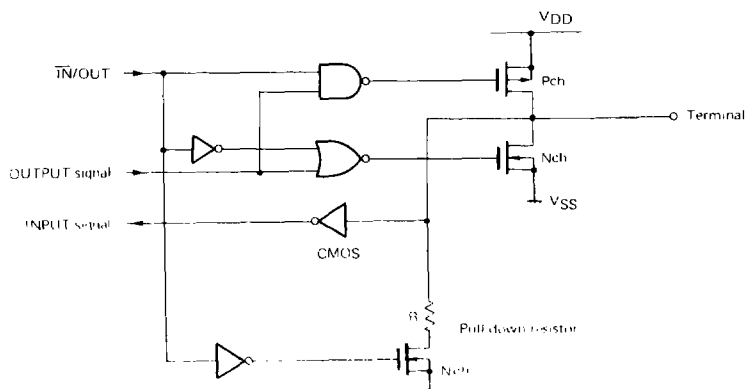

When the  $K_I/O$  part is set to the input mode, pull-down resistors are activated.


#### 1.14 $K_I$ pull down resistors

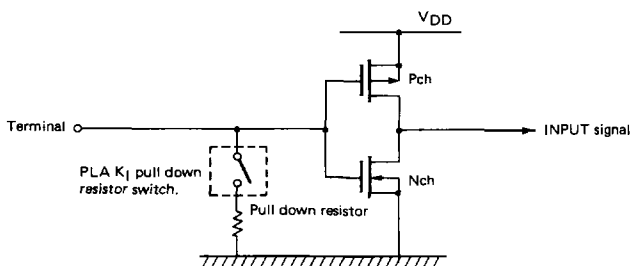

There are pull-down resistors.

Whether or not these pull-down resistors can be selected in the MASK OPTION.

#### 1.15 Run away check $K_I/O$ ALL

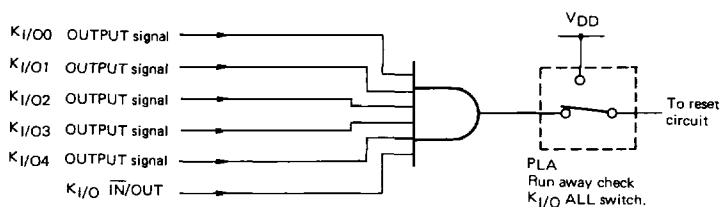

When the  $K_I/O$  ALL switch is ON, the system reset function will operate by detecting the OSC STOP HALT (stand-by) mode and  $K_I/O$  output levels (not all "H").

This function is useful for a key matrix application. Because in a stand-by mode, all key sources have to be active. If not, some keys will not operate until their key sources will be set to the active level.

## 1.16 CONTROL REGISTER

The control register consists of eight bits. The meanings of these bits are described below.

Table

D <sub>9</sub>	D <sub>8</sub>	D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>	
TEST MODE		*	HALT	D.P. AD <sub>9</sub>	D.P. AD <sub>8</sub>	MOD	TIMER	K <sub>I/O</sub>	RLAcc A <sub>0</sub> ←	
must be set to "0"		NOP	NOP	*	*	f <sub>OSC</sub> /8	STOP	IN	A <sub>3</sub>	0
		NOP	OSC STOP	*	*	f <sub>OSC</sub> /12	RUN	OUT	A <sub>3</sub>	1

D<sub>0</sub> : Specifies the data to be input to A<sub>0</sub> when the accumulator is shifted. 0 = A<sub>3</sub> 1 = A<sub>3</sub>

\* μPD6123 doesn't have S-IN input.

D<sub>1</sub> : Specifies the K<sub>I/O</sub> state. 0 = Input mode 1 = output mode

D<sub>2</sub> : Specifies the timer state. 0 = Clock stop 2 = Clock in

D<sub>3</sub> : Specifies the REM output carrier frequency. 0 = f<sub>osc</sub>/8 1 = f<sub>osc</sub>/12

D<sub>4</sub>, D<sub>5</sub> : Specifies the two upper bits of the ROM data pointer.

D<sub>6</sub> : Sets the oscillator circuit when a HALT instruction is executed.

0 = Oscillation does not stop

1 = Oscillation stops (stop mode)

D<sub>7</sub> : NOP

D<sub>8</sub>, D<sub>9</sub> : Must be set to 0 (test mode setting register).

## 2. STANDBY FUNCTION (HALT)

The μPD6123 is provided with a standby mode (HALT) to save power while the program is standby. In addition, the control register can stop the oscillator circuit (stop mode).

When the standby mode is selected, program execution stops. The preceding register and data memory contents are saved in this case.

### 2.1 STOP MODE (OSCILLATION STOP HALT)

In the stop mode, the system clock generation circuit (ceramic oscillation circuit) stops. Therefore, all the operations that require system clock pulses stop.

If a HALT instruction is executed while the timer is operating, the stop mode is set after completion of count-down by the timer.

### 2.2 HALT MODE (OSCILLATION CONTINUE HALT)

The CPU stops operation until a halt cancel condition is generated. In this case, the system clock generation circuit continues to operate.

### 2.3 STANDBY CANCEL CONDITION

- (1)  $K_{I/O}$  input
- (2)  $K_I$  input
- (3) Timer countdown end

\*: When setting a standby cancel condition using an input, either H-level or L-level must be specified.

### 3. AC PIN

Setting the AC pin to the  $V_{SS}$  level will reset the program counter.

Watchdog Timer Function:

A power-on-reset and a CR watchdog timer circuit can be constructed by inserting a 0.1  $\mu$ F capacitor between the AC pin and  $V_{SS}$ .

### 4. MASK OPTION (PLA DATA)

Mask option can be used to specify:

- (1)  $K_I$  port pull-down resistors selection.
- (2) Carrier duty selection (1/2 or 1/3)
- (3) Run away check mode selection.

SW change bit assignments

		MSB				LSB			
		7	6	5	4	3	2	1	0
0	$K_I$	PULL DOWN resistors				0			
1	DUTY	0	0	0	DUTY	0			
2	Run away check	$K_{I/O}$ ALL	0	HALT $K_{I/O}$	HALT $K_I$	0			

#### SW for data

- (1) PULL DOWN resistor

$\left[ \begin{array}{l} 0 \Rightarrow \text{Non-existent} \\ 1 \Rightarrow \text{Existent} \end{array} \right.$

- (2) Modulation duty (when f/12)

$\left[ \begin{array}{l} 0 \Rightarrow 1/2 \text{ Duty} \\ 1 \Rightarrow 1/3 \text{ Duty} \end{array} \right.$

- (3) Run away check

- (a)  $K_{I/O}$  ALL

In OSCILLATION STOP HALT, the system reset function operates when the  $K_{I/O}$  port is a input mode or the  $K_{I/O}$  port output levels are not all H.

$\left[ \begin{array}{l} 0 \Rightarrow \text{Non-reset} \\ 1 \Rightarrow \text{Reset} \end{array} \right.$


- (b) HALT  $K_{I/O}$ , HALT  $K_I$

In a HALT mode, the system reset function operates when this HALT mode is specified as no use.


$\left[ \begin{array}{l} 0 \Rightarrow \text{use} \\ 1 \Rightarrow \text{no use} \end{array} \right.$

## APPLICATION

### INFRARED REMOTE CONTROL TRANSMITTER

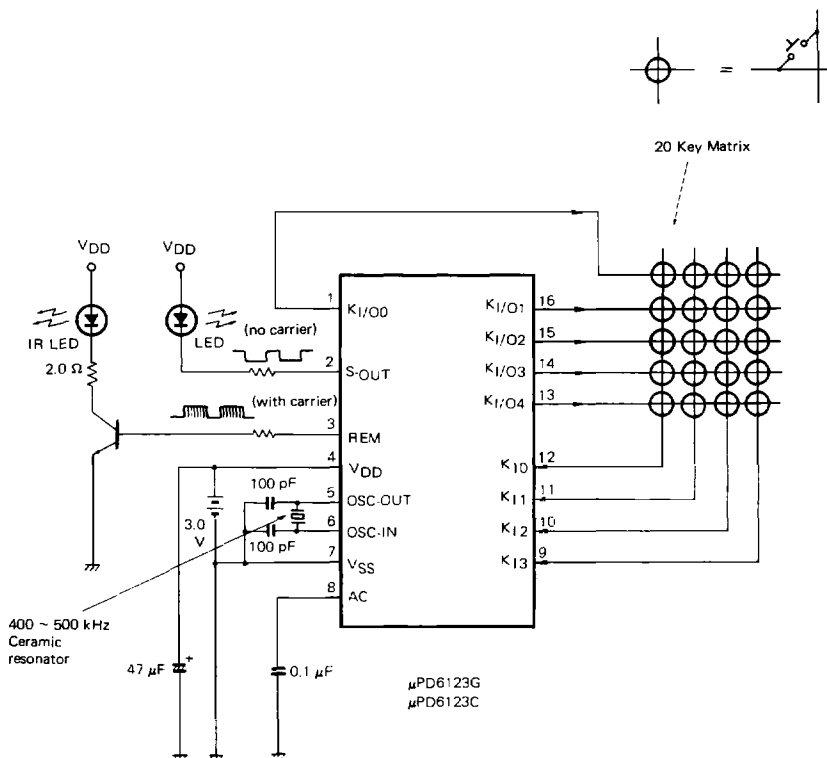

## 16 PIN MINI-FLAT (300 mil)

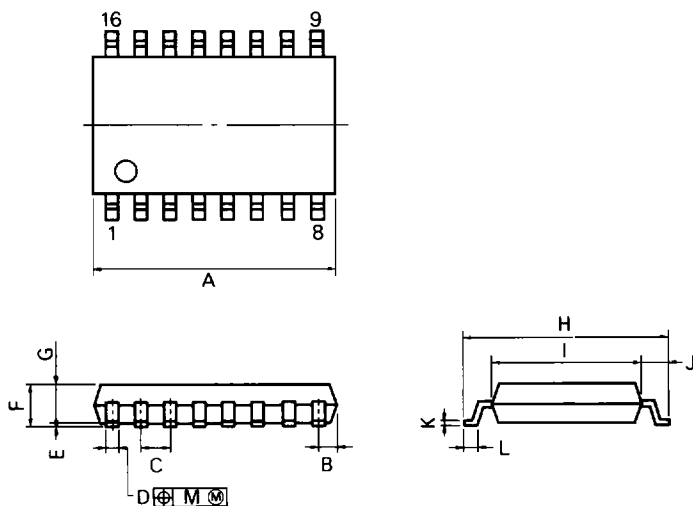

P16GM-50-300B

## NOTE


Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	10.46 MAX.	0.412 MAX.
B	0.78 MAX.	0.031 MAX.
C	1.27 (T.P.)	0.050 (T.P.)
D	0.40 $^{+0.10}_{-0.05}$	0.016 $^{+0.004}_{-0.003}$
E	0.1 $^{+0.1}_{-0.0}$	0.004 $^{+0.004}_{-0.003}$
F	1.8 MAX.	0.071 MAX.
G	1.55	0.061
H	7.7 $^{+0.3}_{-0.2}$	0.303 $^{+0.012}_{-0.010}$
I	5.6	0.220
J	1.1	0.043
K	0.20 $^{+0.10}_{-0.05}$	0.008 $^{+0.004}_{-0.002}$
L	0.6 $^{+0.2}_{-0.1}$	0.024 $^{+0.008}_{-0.006}$
M	0.12	0.005

## ORDERING INFORMATION

Part Number	Package
$\mu$ PD6123G	16 pin mini-flat (300 mil)
$\mu$ PD6123C	16 pin plastic DIP (300 mil)

## 16 PIN PLASTIC DIP (300 mil)

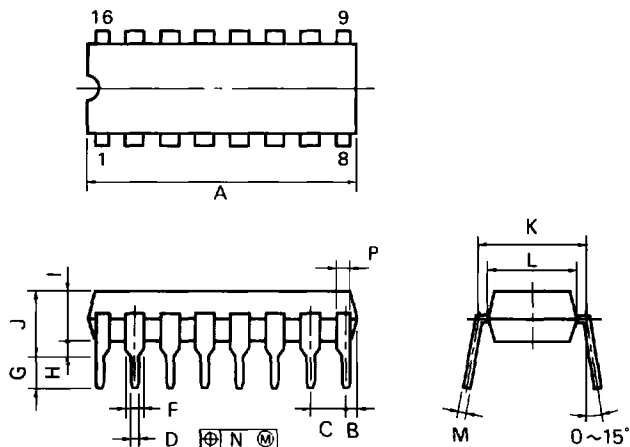


P16C-100-3008

### NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	20.32 MAX	0.800 MAX.
B	1.27 MAX	0.050 MAX
C	2.54 (T.P.)	0.100 (T.P.)
D	0.50 $\pm 0.10$	0.020 $\pm 0.004$
F	1.1 MIN.	0.043 MIN
G	3.5 $\pm 0.3$	0.138 $\pm 0.012$
H	0.51 MIN	0.020 MIN
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX
K	7.62 (T.P.)	0.300 (T.P.)
L	6.5	0.256
M	0.25 $\pm 0.10$	0.010 $\pm 0.004$
N	0.25	0.01
P	1.1 MIN.	0.043 MIN.

**ES 20 PIN CERAMIC MINI FLAT PACKAGE (Unit: mm)**

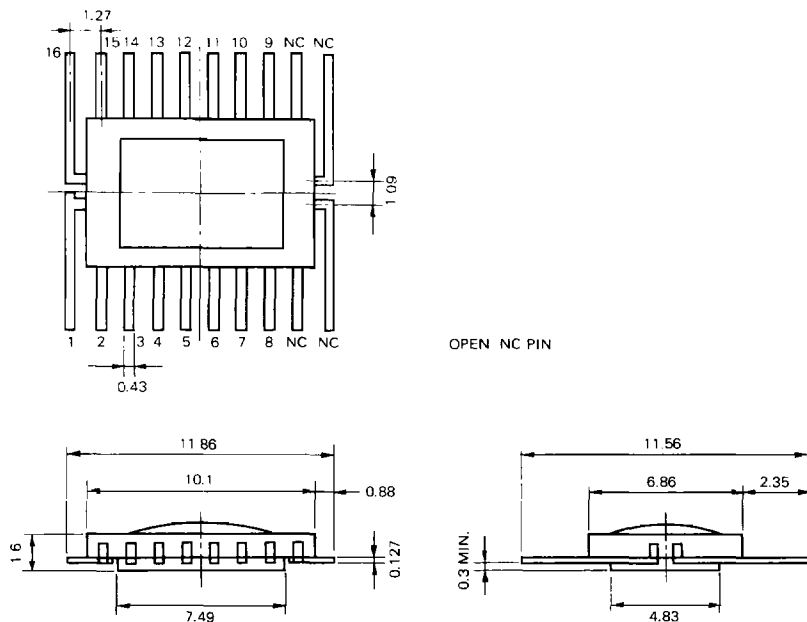

**ES 16 PIN DIP PACKAGE (Unit: mm)**

