


**Features**

- Yellow colored transparency lens type
- $\phi 5\text{mm}$ (T-13/4) all plastic mold type
- Low power consumption

**Outline Dimensions**

**unit : mm**

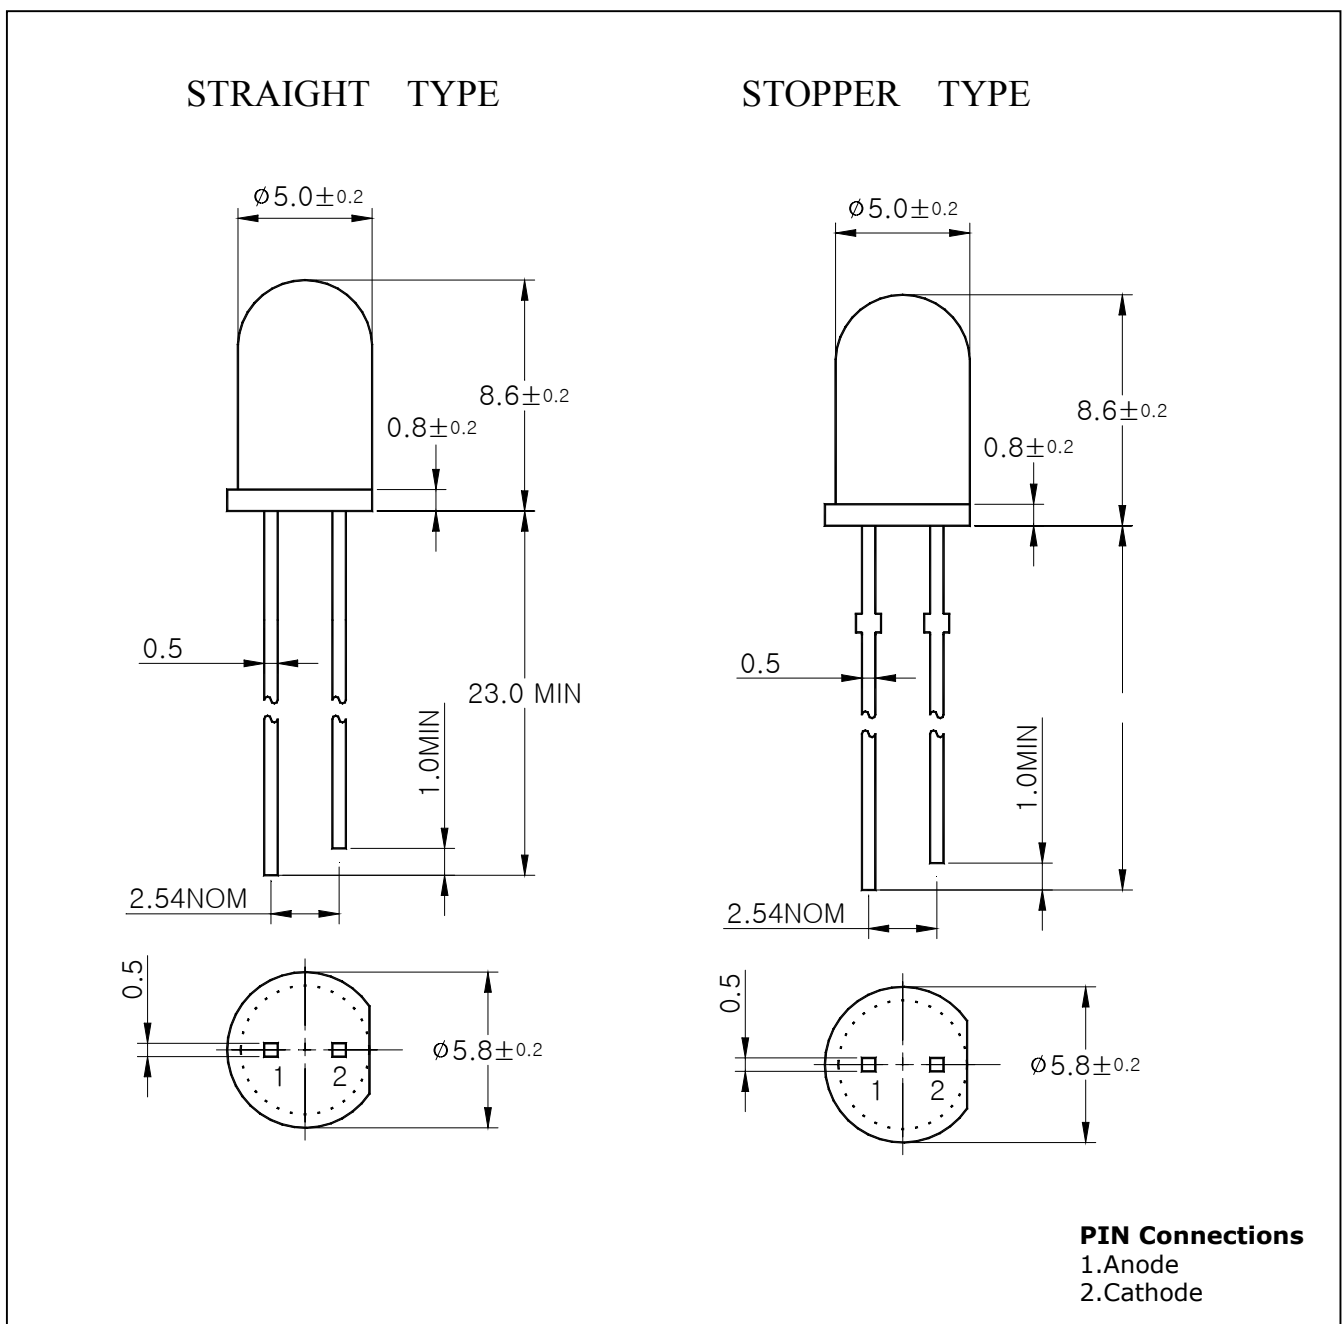

## Absolute maximum ratings

| Characteristic          | Symbol    | Ratings             | Unit |
|-------------------------|-----------|---------------------|------|
| Power Dissipation       | $P_D$     | 85                  | mW   |
| Forward Current         | $I_F$     | 30                  | mA   |
| *1Peak Forward Current  | $I_{FP}$  | 50                  | mA   |
| Reverse Voltage         | $V_R$     | 4                   | V    |
| Operating Temperature   | $T_{opr}$ | -25 ~ 85            | °C   |
| Storage Temperature     | $T_{stg}$ | -30 ~ 100           | °C   |
| *2Soldering Temperature | $T_{sol}$ | 260°C for 5 seconds |      |

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

\*2.Keep the distance more than 2.0mm from PCB to the bottom of LED package

## Electrical Characteristics

| Characteristic     | Symbol           | Test Condition | Min. | Typ. | Max. | Unit |
|--------------------|------------------|----------------|------|------|------|------|
| Forward Voltage    | $V_F$            | $I_F= 20mA$    | -    | 2.0  | 2.7  | V    |
| Radiant Intensity  | $I_E$            | $I_F= 20mA$    | 35   | 80   | -    | mcd  |
| Peak Wavelength    | $\lambda_p$      | $I_F= 20mA$    | -    | 585  | -    | nm   |
| Spectrum Bandwidth | $\Delta \lambda$ | $I_F= 20mA$    | -    | 30   | -    | nm   |
| Reverse Current    | $I_R$            | $V_R=4V$       | -    | -    | 10   | uA   |
| *3Half angle       | $\theta^{1/2}$   | $I_F= 20mA$    | -    | ±11  | -    | deg  |

\*3.  $\theta^{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity

Characteristic Diagrams

Fig. 1  $I_F - V_F$

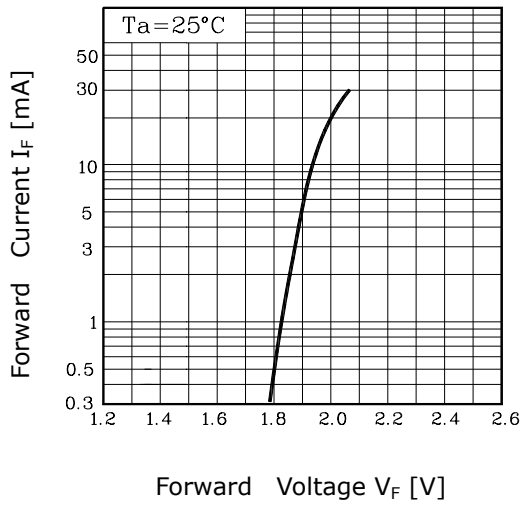


Fig. 2  $I_V - I_F$

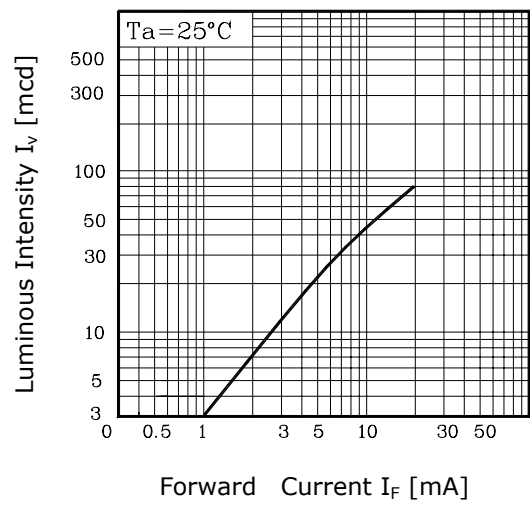


Fig. 3  $I_F - T_a$

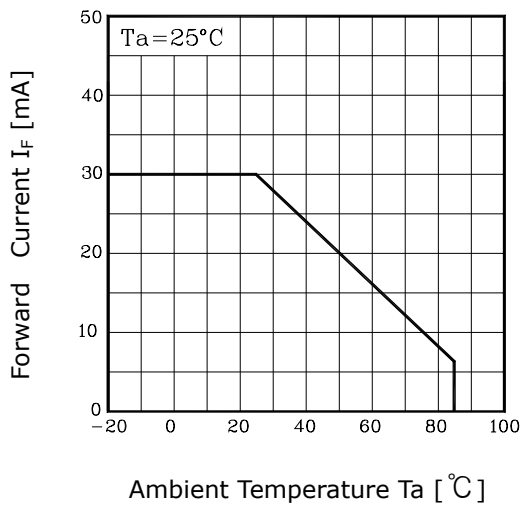


Fig.4 Spectrum Distribution

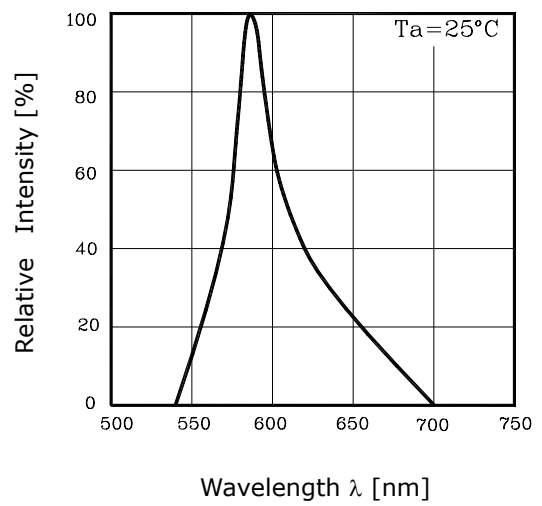


Fig. 5 Radiation Diagram

