
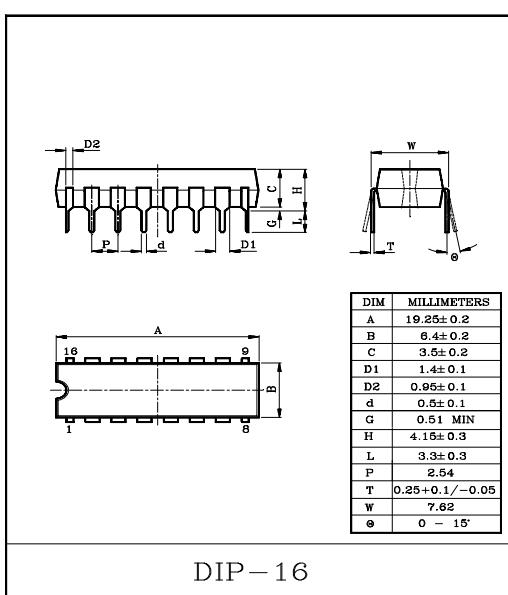
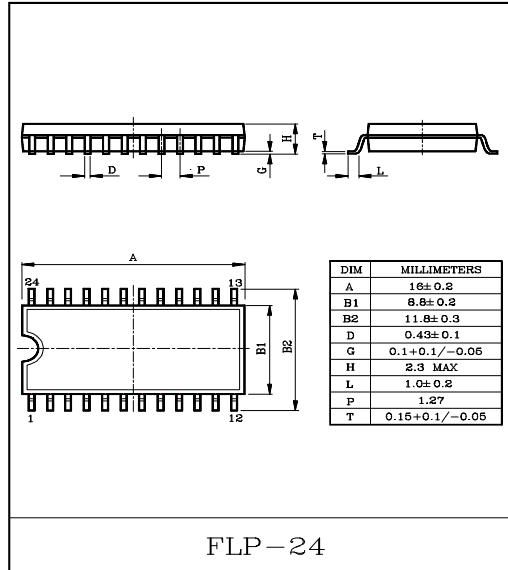


ELECTRONIC VOLUME CONTROL

KIC9412AP/AF, KIC9413AP are electronic volume control ICs developed for use in home stereos and other audio equipment. Using serial data input from external sources, it controls the sound volume, balance and loudness circuits.


FEATURES

- Sound volume can be controlled in 62 steps from 0 to 78dB or up to an infinite level in 1 or 2dB increments.
- Incorporating two channels of volume control circuits, the device allows independent volume control : therefore, it also provides the balancing function.
- A loudness circuit(20dB tap) is built in KIC9412AP and KIC9412AF.
- Can operate with a single or dual power supplies.
- Can control up to 4 chips on the same bus by using chip select input.
- Thanks to its polysilicon resistor, the device allows you to configure a low-distortion, high-performance volume control system.

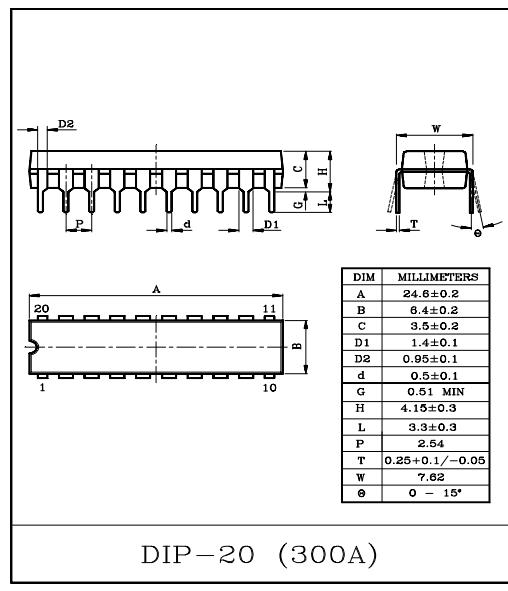


KIC9412AP/AF, KIC9413AP

PIN CONNECTIONS

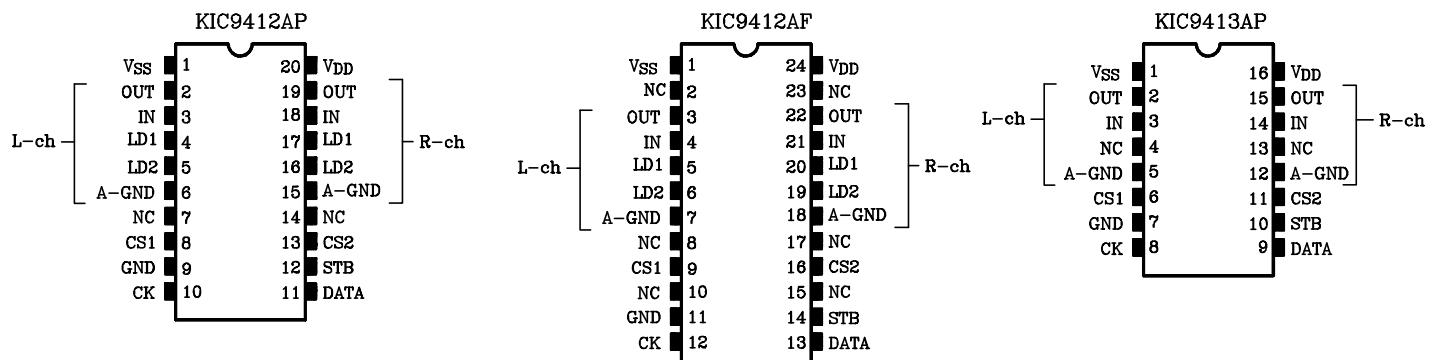


BLOCK DIAGRAM (KIC9412AP)

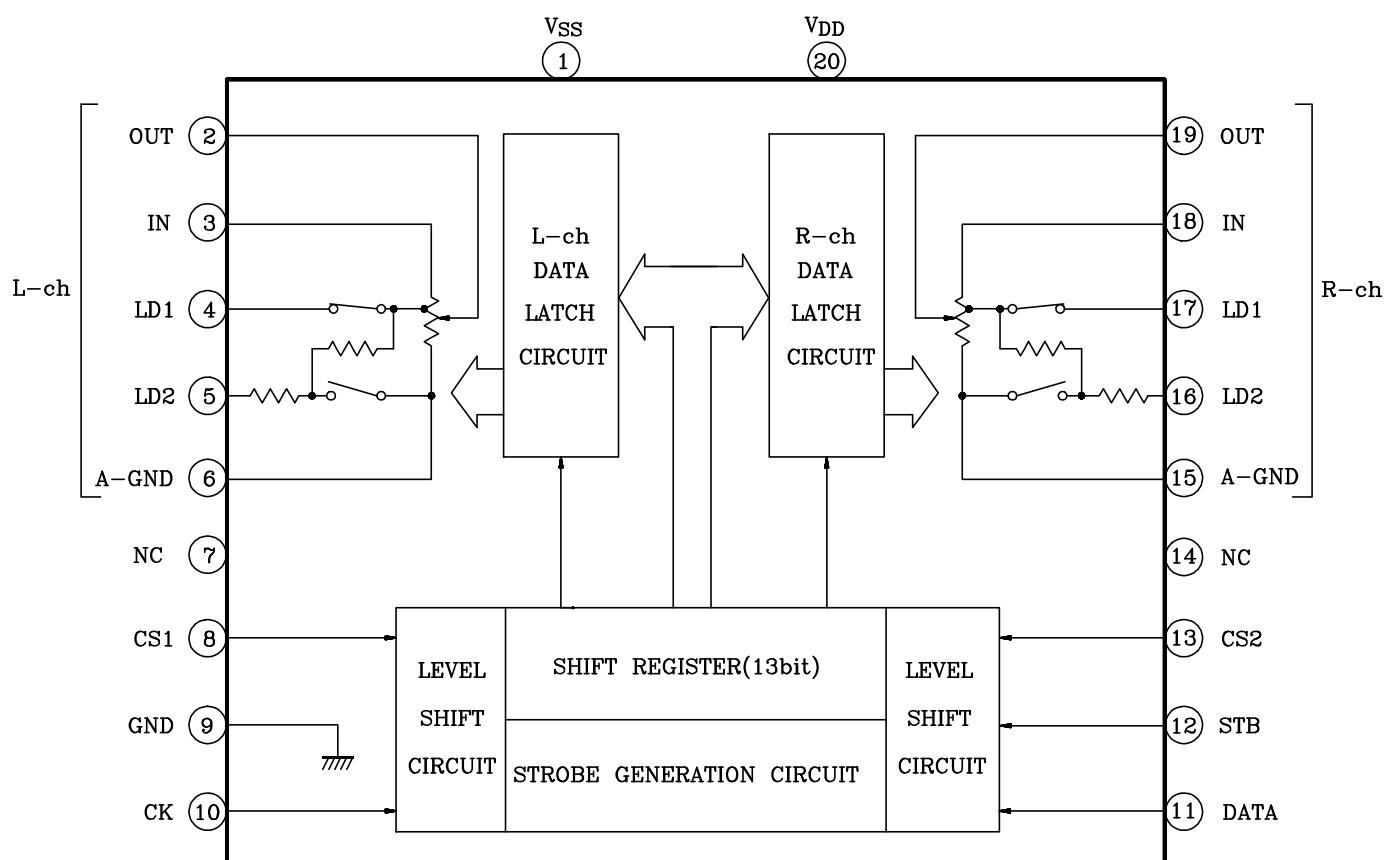


KIC9412AP/AF, KIC9413AP

BLOCK DIAGRAM (KIC9412AF)

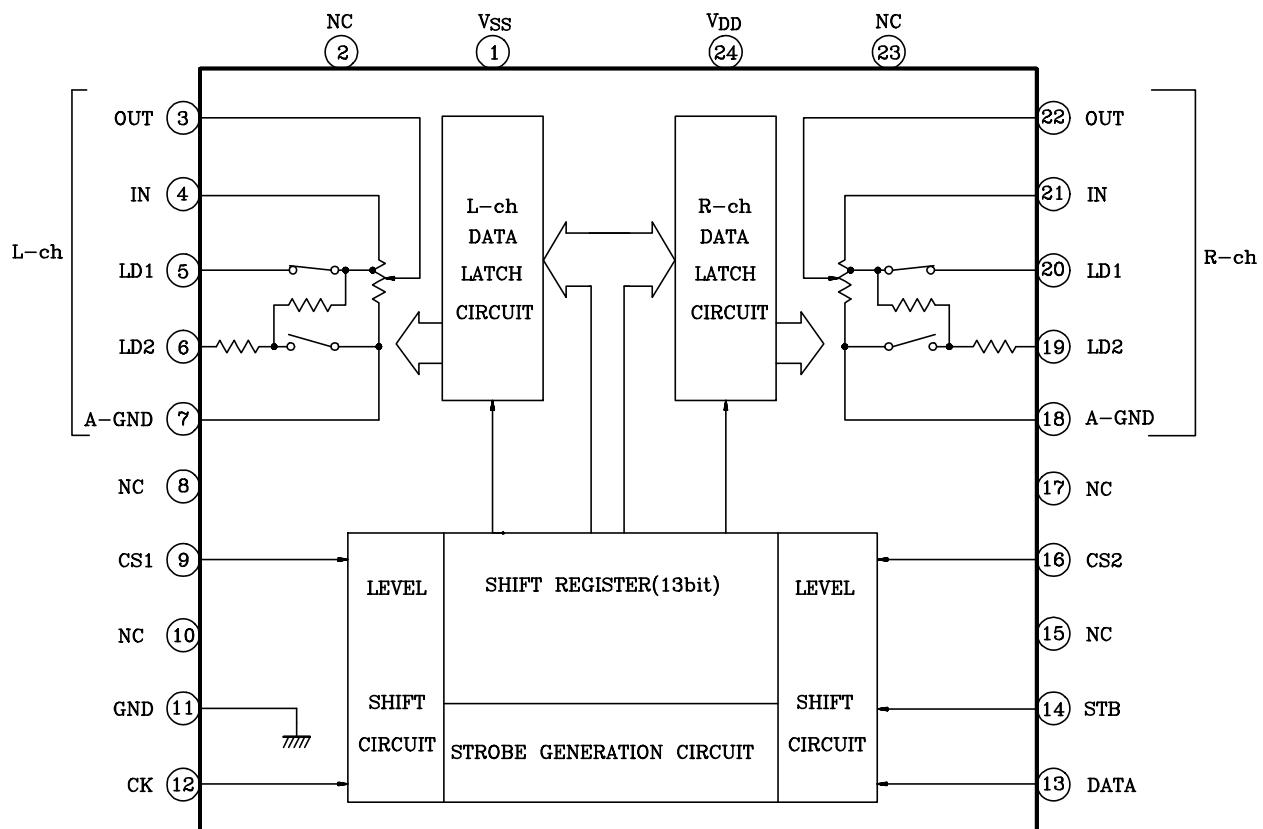

BLOCK DIAGRAM (KIC9413AP)

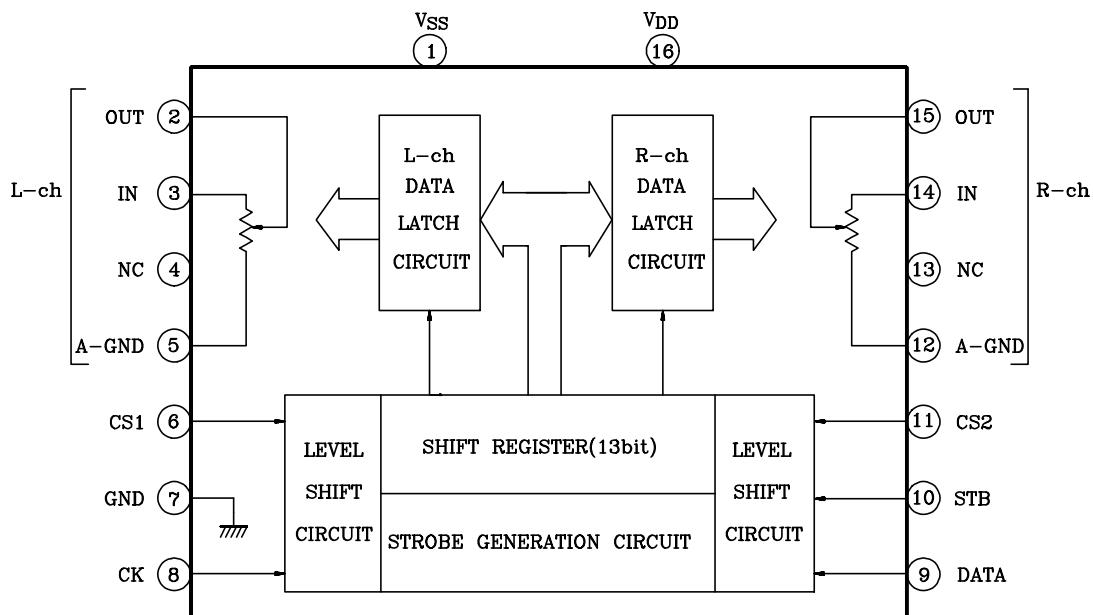

KIC9412AP/AF, KIC9413AP

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage (1)	V _{DD} /V _{SS}	-0.3~36	V
Supply Voltage (2)	V _{DD} /GND	-0.3~20	V
GND Block Input Voltage	V _{IN} (1)	-0.3~V _{DD} +0.3	V
V _{SS} Block Input Voltage	V _{IN} (2)	V _{SS} -0.3~V _{DD} +0.3	V
Power Dissipation	P _D	300	mW
Operating Temperature Range	T _{opr}	-40~85	°C
Storage Temperature Range	T _{stg}	-65~150	°C


ELECTRICAL CHARACTERISTICS

(Referenced to V_{DD}=15V, V_{SS}=-15V, GND=0V at Ta=25°C unless otherwise noted)


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Operating Supply Voltage (1)	V _{DD} /V _{CC}	-	Operating with dual power supplies	12	~	34	V	
Operating Supply Voltage (2)	V _{DD} /GND	-	Operating with single power supply	6.0	~	18	V	
Operating Supply Current	I _{DD}	1	Non-loaded, no input	-	0.5	2.0	mA	
Input Voltage	"H" Level	V _{IH} (1)	CK, DATA, STB pins V _{DD} =6.0~18V	4.0	~	V _{DD}	V	
	"L" Level			GND	~	1.0		
Input Voltage	"H" Level	V _{IH} (2)	CS1 and CS2 pins	V _{DD} ×0.7	~	V _{DD}	V	
	"L" Level			GND	~	V _{DD} ×0.3		
Input Current	"H" Level	I _{IH}	CK, DATA, STB, CS1, CS2 pins	V _{IH} =15V	-1.0	~	1.0	μA
	"L" Level			V _{IL} =0V	-1.0	~	1.0	
Operating Frequency	f _{OP}	-	CK, DATA, STB pins	0	~	1.0	MHz	
Min. Operating Clock Width	T _{Ck}	-		0.5	-	-	μS	
Volume Resistance	R _{VR}	-	When loudness OFF	18.5	27.5	36.5	kΩ	
Step Deviation	ΔVR	-	Deviation between volume steps	-1.2	~	1.2	dB	
Analog Switch ON Resistance	R _{ON}	-	Internal analog switch	-	750	1500	Ω	
Analog Switch Leakage Current	I _{OFF}	-		-0.1	~	0.1	μA	
Total Harmonic Distortion	THD	1	f _{IN} =1kHz V _{IN} =1Vrms R _g =600Ω, R _L =100kΩ BW=20Hz~20kHz	-	0.005	-	%	
Maximum Attenuation	ATT _{MAX}			-	100	-	dB	
Output Noise Voltage	V _N			-	1.0	-	μVrms	
Crosstalk	C·T			-	100	-	dB	

KIC9412AP/AF, KIC9413AP

TEST CIRCUIT (I_{DD}/THD/ATT_{MAX}/V_N/C·T)

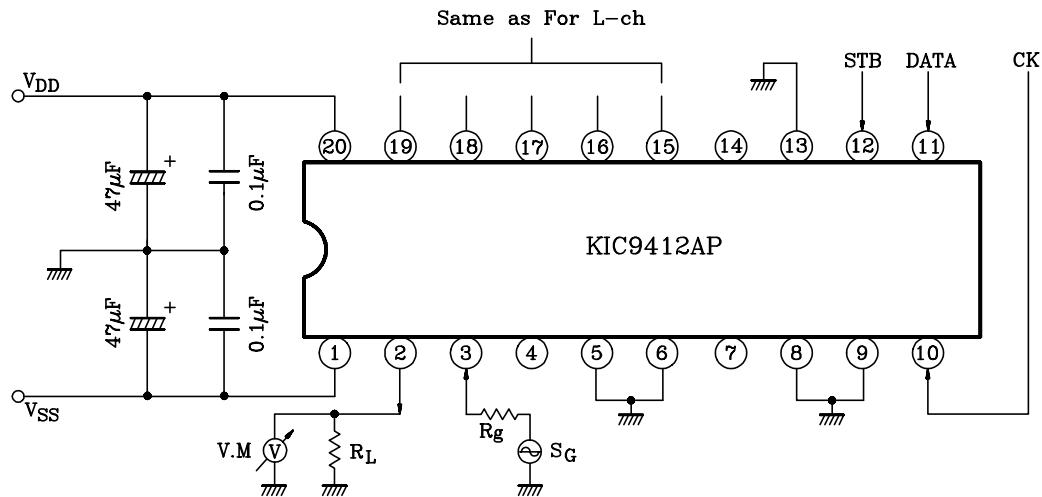

EXAMPLE OF APPLICATION CIRCUIT (KIC9412AP)

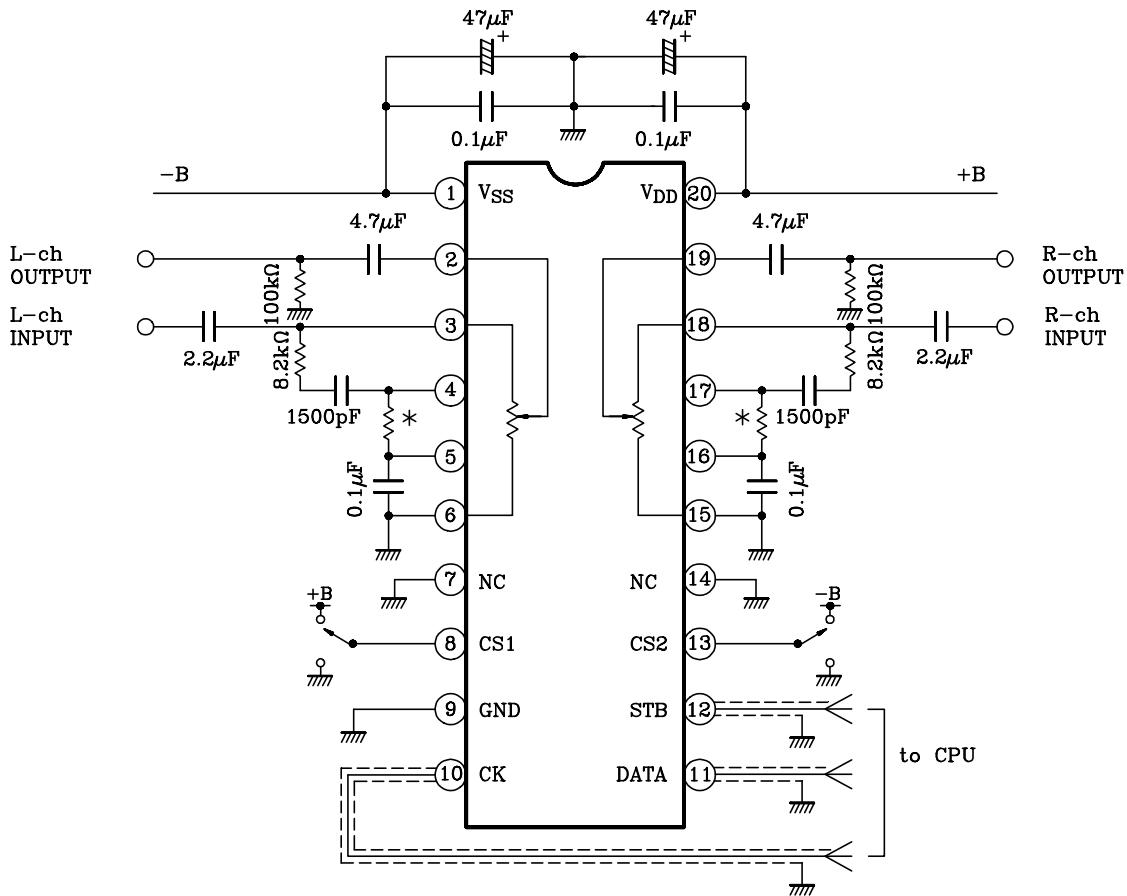

- Used to prevent noise when loudness control is turned on or off. $R=220\sim470\text{k}\Omega$

(Note) Since a high-frequency digital signal is input to the CK, DATA and STB pins, corrective measures must be taken to prevent it from getting mixed in the analog circuit to generate noise by, for example, guarding the above signal lines with ground patterns or using shielding wire for these lines.

KIC9412AP/AF, KIC9413AP

PIN DESCRIPTION

Numerals in [] means the pin No. of KIC9412AF and () means the pin No. of KIC9413AP.

Pin No.	SYMBOL	PIN NAME	FUNCTION	REMARK
1 [1] (1)	V _{SS}	Negative power supply pin	When using two power supplies V _{DD} =6.0~17V GND=0V V _{SS} =-6.0~-17V	-
9 [11] (7)	GND	Digital GND pin		
20 [24] (16)	V _{DD}	Positive power supply pin	When using a single power supply V _{DD} =6.0~18V GND=V _{SS} =0V	
2 [3] (2)	L-OUT	volume output pin	<ul style="list-style-type: none"> volume circuit (KIC9412AP/AF) 	
19 [22] (15)	R-OUT			
3 [4] (3)	L-IN	volume input pin		
18 [21] (14)	R-IN			
4 [5] (-)	L-LD1	Loudest tap output pin		
17 [20] (-)	R-LD1			
5 [6] (-)	L-LD2			
16 [19] (-)	R-LD2			
6 [7] (5)	L-A-GND	Analog GND pin		
15 [18] (12)	R-A-GND			
8 [9] (6)	CS1	Chip select input pin	Up to 4 chips on the same bus can be used by switching over chip select code	-
13 [16] (11)	CS2			
10 [12] (8)	CK	clock input pin	Data transfer clock input	Low threshold value input pin
11 [13] (9)	DATA	Data input pin	Volume setup serial data input	
12 [14] (13)	STB	Strobe input pin	Data write strobe input	
7, 14 [2,8,10,15,17,23] (4,13)	NC	No connection		-


KIC9412AP/AF, KIC9413AP

DEVICE OPERATION

1. Setting up volume value (amount of attenuation)

Serial data consisting of 13 bits is used to set a volume value.

- Data format

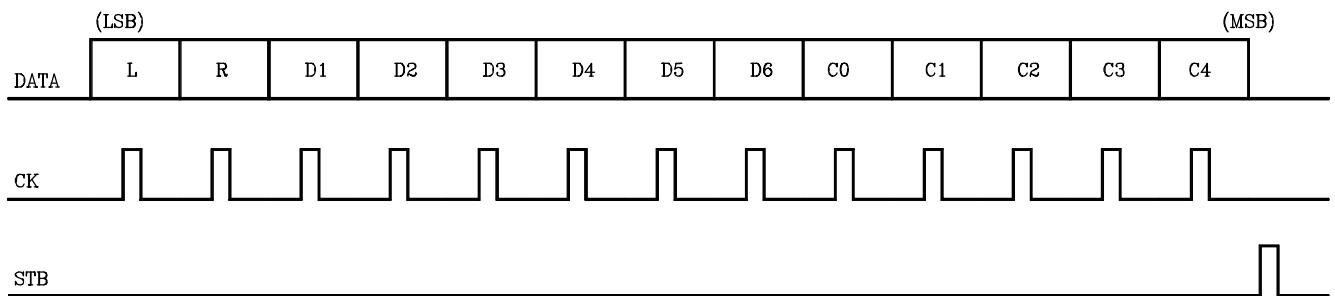

- 1) The bits "L" and "R" respectively are the left-and right-channel select data.
The left-channel volume is set when L=1 : the right-channel volume is set when R=1.
(L=R=1 are set simultaneously.)
- 2) The bit "LD" is the loudness setup data. Loudness is turned on when LD=1.
(This only applies to the KIC9412AP and KIC9412AF. Set this bit to "0" for the KIC9413AP.)

KIC9412AP/AF, KIC9413AP

3) The bits "D1" through "D6" are the volume setup data. For details, see the tables below.

VOLUME VALUE	D ₁	D ₂	D ₃	D ₄	D ₅	D ₆
0dB	0	0	0	0	0	0
-1	1	0	0	0	0	0
-2	0	1	0	0	0	0
-3	1	1	0	0	0	0
-4	0	0	1	0	0	0
-5	1	0	1	0	0	0
-6	0	1	1	0	0	0
-7	1	1	1	0	0	0
-8	0	0	0	1	0	0
-9	1	0	0	1	0	0
-10	0	1	0	1	0	0
-11	1	1	0	1	0	0
-12	0	0	1	1	0	0
-13	1	0	1	1	0	0
-14	0	1	1	1	0	0
-15	1	1	1	1	0	0
-16	0	0	0	0	1	0
-17	1	0	0	0	1	0
-18	0	1	0	0	1	0
-19	1	1	0	0	1	0
-20	0	0	1	0	1	0
-21	1	0	1	0	1	0
-22	0	1	1	0	1	0
-23	1	1	1	0	1	0
-24	0	0	0	1	1	0
-25	1	0	0	1	1	0
-26	0	1	0	1	1	0
-27	1	1	0	1	1	0
-28	0	0	1	1	1	0
-29	1	0	1	1	1	0
-30	0	1	1	1	1	0
-31	1	1	1	1	1	0

VOLUME VALUE	D ₁	D ₂	D ₃	D ₄	D ₅	D ₆
-32dB	0	0	0	0	0	1
-33	1	0	0	0	0	1
-34	0	1	0	0	0	1
-35	1	1	0	0	0	1
-36	0	0	1	0	0	1
-37	1	0	1	0	0	1
-38	0	1	1	0	0	1
-39	1	1	1	0	0	1
-40	0	0	0	1	0	1
-41	1	0	0	1	0	1
-42	0	1	0	1	0	1
-43	1	1	0	1	0	1
-44	0	0	1	1	0	1
-46	1	0	1	1	0	1
-48	0	1	1	1	0	1
-50	1	1	1	1	0	1
-52	0	0	0	0	1	1
-54	1	0	0	0	1	1
-56	0	1	0	0	1	1
-58	1	1	0	0	1	1
-60	0	0	1	0	1	1
-62	1	0	1	0	1	1
-64	0	1	1	0	1	1
-66	1	1	1	0	1	1
-68	0	0	0	1	1	1
-70	1	0	0	1	1	1
-72	0	1	0	1	1	1
-74	1	1	0	1	1	1
-76	0	0	1	1	1	1
-78	1	0	1	1	1	1
-∞	0	1	1	1	1	1
Use Inhibited	1	1	1	1	1	1

KIC9412AP/AF, KIC9413AP


- 4) The bits "C1" through "C4" are the chip select code data.

These bits set the code data that corresponds to the CS1 and CS2 inputs.

CS1	CS2	C1	C2	C3	C4
L	L	0	0	1	1
H	L	1	0	1	1
L	H	0	1	1	1
H	H	1	1	1	1

2. Serial data timing


Make sure that CK, DATA and STB are input to the device at the timings shown below.

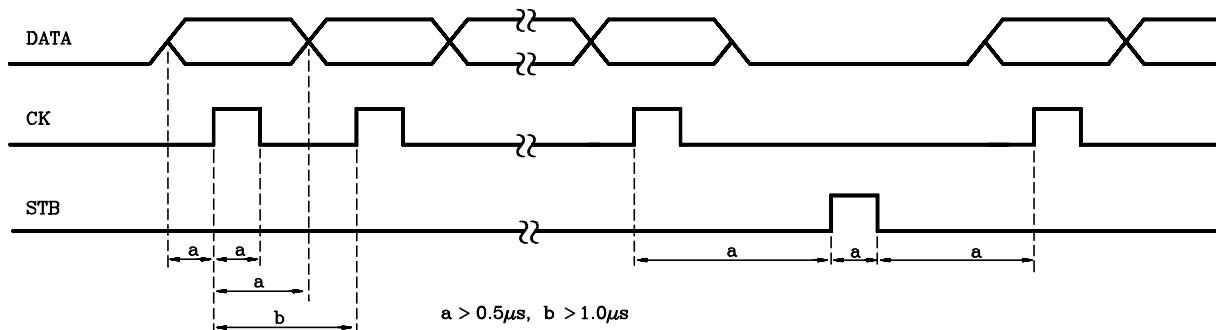

3. Operating with a single or dual power supplies

The KIC9412AP/AF, KIC9413AP can operate with either a single power supply or dual power supplies.

- Operation with single power supply

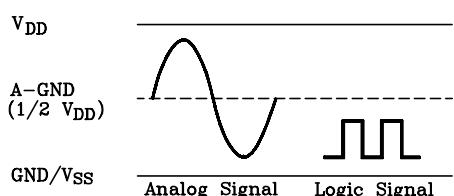

- Operation with dual power supplies

