

MiniSKiiP® 3 PIM		1200V/100A
Features	• Solderless interconnection • Mitsubishi Generation 6 technology	MiniSKiiP® 3 housing
Target Applications	• Industrial Motor Drives	Schematic
Types	• V23990-K420-A50-PM	

Maximum Ratings

T_j=25°C, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Input Rectifier Diode				
Repetitive peak reverse voltage	V _{RRM}		1600	V
DC forward current	I _{FAV}	T _j =T _j max T _c =80°C	77 107	A
Surge forward current	I _{FSM}	T _c =25°C	3960	A
I ² t-value	I ² t	t _p =10ms T _c =150°C	1000	A ² s
Power dissipation per Diode	P _{tot}	T _j =T _j max T _c =80°C	82 125	W
Maximum Junction Temperature	T _j max		150	°C

Inverter Transistor

Collector-emitter break down voltage	V _{CE}		1200	V
DC collector current	I _C	T _j =T _j max T _c =80°C	77 102	A
Repetitive peak collector current	I _{Cpulse}	t _p limited by T _j max	300	A
Turn off safe operating area		V _{CE} ≤ 850V, T _j ≤ Top max	300	A
Power dissipation per IGBT	P _{tot}	T _j =T _j max T _c =80°C	138 209	W
Gate-emitter peak voltage	V _{GE}		±20	V
Short circuit ratings	t _{SC} V _{CC}	T _j ≤150°C V _{GE} =15V	10 800	μs V
Maximum Junction Temperature	T _j max		175	°C

Maximum Ratings

$T_j=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit	
Inverter Diode					
Peak Repetitive Reverse Voltage	V_{RRM}	$T_j=25^\circ\text{C}$	1200	V	
DC forward current	I_F	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	74 97	A	
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j\text{max}$	200	A	
Power dissipation per Diode	P_{tot}	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	113 172	W	
Maximum Junction Temperature	$T_j\text{max}$		175	$^\circ\text{C}$	
Brake Transistor					
Collector-emitter break down voltage	V_{CE}		1200	V	
DC collector current	I_C	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	77 104	A	
Repetitive peak collector current	$I_{C\text{puls}}$	t_p limited by $T_j\text{max}$	300	A	
Turn off safe operating area		$V_{CE} \leq 850\text{V}$, $T_j \leq T_{j\text{max}}$	300	A	
Power dissipation per IGBT	P_{tot}	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	146 221	W	
Gate-emitter peak voltage	V_{GE}		± 20	V	
Short circuit ratings	t_{sc} V_{CC}	$T_j \leq 150^\circ\text{C}$ $V_{GE}=15\text{V}$	10 800	μs V	
Maximum Junction Temperature	$T_j\text{max}$		175	$^\circ\text{C}$	
Brake Diode					
Peak Repetitive Reverse Voltage	V_{RRM}	$T_j=25^\circ\text{C}$	1200	V	
DC forward current	I_F	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	62 98	A	
Repetitive peak forward current	I_{FRM}	t_p limited by $T_j\text{max}$	200	A	
Power dissipation per Diode	P_{tot}	$T_j=T_j\text{max}$ $T_h=80^\circ\text{C}$ $T_c=80^\circ\text{C}$	114 173	W	
Maximum Junction Temperature	$T_j\text{max}$		175	$^\circ\text{C}$	
Thermal Properties					
Storage temperature	T_{stg}		-40...+125	$^\circ\text{C}$	
Operation temperature under switching condition	T_{op}		-40...+($T_{j\text{max}} - 25$)	$^\circ\text{C}$	
Insulation Properties					
Insulation voltage	V_{is}	$t=2\text{s}$	DC voltage	4000	V
Creepage distance				min 12,7	mm
Clearance				min 12,7	mm
Comparative tracking index	CTI			>200	

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_c [A] or I_r [A] or I_b [A]	T_j		Min	Typ	Max	
Input Rectifier Diode										
Forward voltage	V_F			75	$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$		1,10 1,05		1,21	V
Threshold voltage (for power loss calc. only)	V_{to}			75	$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$		0,89 0,75			V
Slope resistance (for power loss calc. only)	r_t			75	$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$		3 4			mΩ
Reverse current	I_r		1600		$T_j=25^\circ\text{C}$ $T_j=125^\circ\text{C}$				0,05	mA
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um $\lambda = 1 \text{ W/mK}$						1,05		K/W
Inverter Transistor										
Gate emitter threshold voltage	$V_{GE(th)}$			10	0,001	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		100	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		1,78 1,95	2,15	V
Collector-emitter cut-off current incl. Diode	I_{CES}	$V_{CE}=V_{GE}$	0	1200		$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$			1	mA
Gate-emitter leakage current	I_{GES}		20	0		$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$			500	nA
Integrated Gate resistor	R_{gint}							none		Ω
Turn-on delay time	$t_{d(on)}$	$R_{goff}=8 \Omega$ $R_{gon}=8 \Omega$	± 15	600	100	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		113 113		ns
Rise time	t_r					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		24 28		
Turn-off delay time	$t_{d(off)}$					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		177 235		
Fall time	t_f					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		61 101		
Turn-on energy loss per pulse	E_{on}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		6,93 10,78		mWs
Turn-off energy loss per pulse	E_{off}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		5,82 10,11		
Input capacitance	C_{ies}	$f=1\text{MHz}$	0	10		$T_j=25^\circ\text{C}$		6740		nF
Output capacitance	C_{oss}							570		
Reverse transfer capacitance	C_{rss}							73		
Gate charge	Q_{Gate}		±15	15	100	$T_j=25^\circ\text{C}$		233		nC
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um $\lambda = 1 \text{ W/mK}$						0,69		K/W
Inverter Diode										
Diode forward voltage	V_F	$R_{gon}=8 \Omega$	± 15	600	100	$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	1,35	1,76 1,76	2,05	V
Peak reverse recovery current	I_{RRM}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		89 108		A
Reverse recovery time	t_{rr}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		264 432		ns
Reverse recovered charge	Q_{rr}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		9,56 19,01		μC
Peak rate of fall of recovery current	$d(I_{RRM})/\text{dt}$					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		1085 733		A/μs
Reverse recovered energy	E_{rec}					$T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$		3,56 7,41		mWs
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um $\lambda = 1 \text{ W/mK}$						0,84		K/W

Characteristic Values


Parameter	Symbol	Conditions					Value			Unit	
			V_{GE} [V] or V_{GS} [V]	V_r [V] or V_{CE} [V] or V_{DS} [V]	I_c [A] or I_r [A] or I_b [A]	T_j	Min	Typ	Max		
Brake Transistor											
Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=V_{GE}$		10	0,001	$T_j=25^\circ C$ $T_j=150^\circ C$	5,4	6	6,6	V	
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		100	$T_j=25^\circ C$ $T_j=150^\circ C$		1,77 2,02	2,15	V	
Collector-emitter cut-off incl diode	I_{CES}		0	1200		$T_j=25^\circ C$ $T_j=150^\circ C$			1	mA	
Gate-emitter leakage current	I_{GES}		20	0		$T_j=25^\circ C$ $T_j=150^\circ C$			500	nA	
Integrated Gate resistor	R_{gint}							none		Ω	
Turn-on delay time	$t_{d(on)}$	$R_{goff}=8 \Omega$ $R_{gon}=8 \Omega$	± 15	600	100	$T_j=25^\circ C$ $T_j=150^\circ C$	115 114			ns	
Rise time	t_r					$T_j=25^\circ C$ $T_j=150^\circ C$	51 55				
Turn-off delay time	$t_{d(off)}$					$T_j=25^\circ C$ $T_j=150^\circ C$	175 232				
Fall time	t_f					$T_j=25^\circ C$ $T_j=150^\circ C$	53 102				
Turn-on energy loss per pulse	E_{on}					$T_j=25^\circ C$ $T_j=150^\circ C$	10,10 14,70			mWs	
Turn-off energy loss per pulse	E_{off}					$T_j=25^\circ C$ $T_j=150^\circ C$	5,83 10,13				
Input capacitance	C_{ies}							6740			
Output capacitance	C_{oss}	$f=1MHz$	0	10		$T_j=25^\circ C$		570		pF	
Reverse transfer capacitance	C_{rss}							73			
Gate charge	Q_{Gate}					$T_j=25^\circ C$		233			
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um $\lambda = 1 W/mK$						0,65		K/W	
Brake Diode											
Diode forward voltage	V_F				100	$T_j=25^\circ C$ $T_j=150^\circ C$	1,35	1,69 1,76	2,05	V	
Reverse leakage current	I_r	$R_{gon}=8 \Omega$		1200		$T_j=25^\circ C$ $T_j=150^\circ C$			18	μA	
Peak reverse recovery current	I_{RRM}	$R_{gon}=8 \Omega$ $R_{goff}=8 \Omega$	± 15	600	100	$T_j=25^\circ C$ $T_j=150^\circ C$	53 74			A	
Reverse recovery time	t_{rr}					$T_j=25^\circ C$ $T_j=150^\circ C$	314 509			ns	
Reverse recovered charge	Q_{rr}					$T_j=25^\circ C$ $T_j=150^\circ C$	8,58 8,58			μC	
Peak rate of fall of recovery current	$di(rec)max/dt$					$T_j=25^\circ C$ $T_j=150^\circ C$	570 290			$A/\mu s$	
Reverse recovery energy	E_{rec}					$T_j=25^\circ C$ $T_j=150^\circ C$	3,16 6,94			mWs	
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness≤50um $\lambda = 1 W/mK$						0,83		K/W	
Thermistor											
Rated resistance	R					$T_j=25^\circ C$		1000		Ω	
Deviation of R100	$\Delta R/R$	$R100=1670 \Omega$				$T_c=100^\circ C$	-3		3	%	
Power dissipation	P					$T_c=100^\circ C$		1670,313		Ω	
Power dissipation constant						$T_j=25^\circ C$				mW/K	
B-value	$B_{(25/50)}$					$T_j=25^\circ C$		7,635*10-3		$1/K$	
B-value	$B_{(25/100)}$					$T_j=25^\circ C$		1,731*10-5		$1/K^2$	
Vincotech PTC Reference						$T_j=25^\circ C$			E		

Output Inverter

Figure 1 Output inverter IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

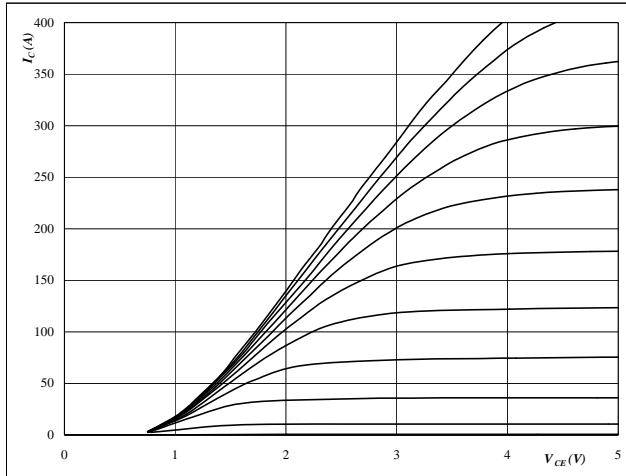

At

$$t_p = 250 \mu\text{s}$$


$$T_j = 25^\circ\text{C}$$

V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 Output inverter IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

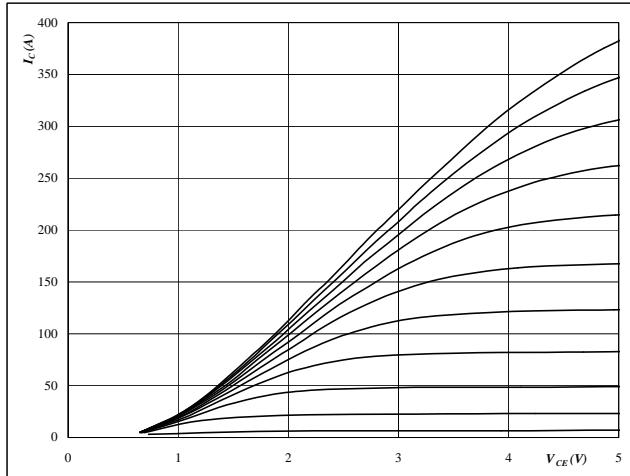

At

$$t_p = 250 \mu\text{s}$$


$$T_j = 150^\circ\text{C}$$

V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 Output inverter IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

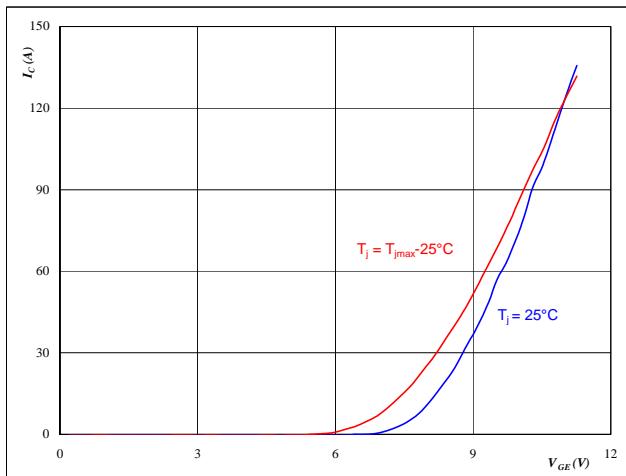

At


$$t_p = 250 \mu\text{s}$$

$$V_{CE} = 10 \text{ V}$$

Figure 4 Output inverter FWD

Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

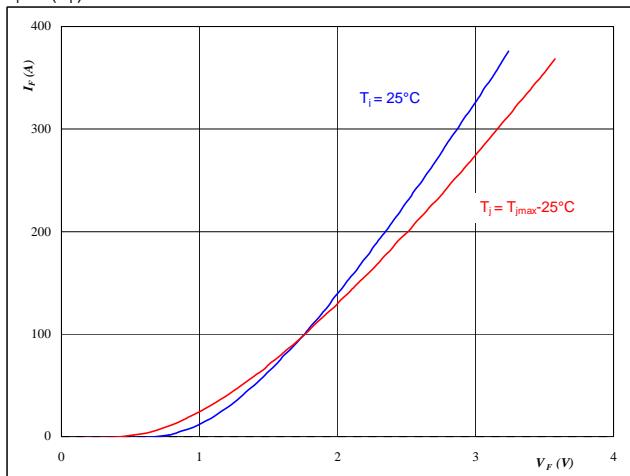

At


$$t_p = 250 \mu\text{s}$$

Output Inverter

Figure 5

Typical switching energy losses
as a function of collector current

$$E = f(I_C)$$

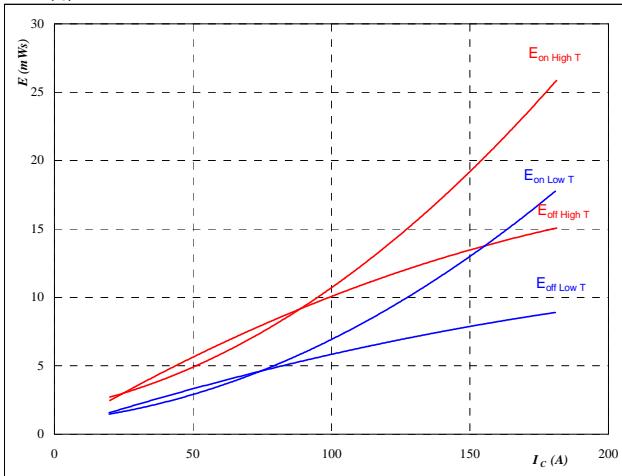


With an inductive load at

$$\begin{aligned} T_j &= 25/150 \quad ^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ R_{gon} &= 8 \quad \Omega \\ R_{goff} &= 8 \quad \Omega \end{aligned}$$

Output inverter IGBT
Figure 6

Typical switching energy losses
as a function of gate resistor

$$E = f(R_G)$$

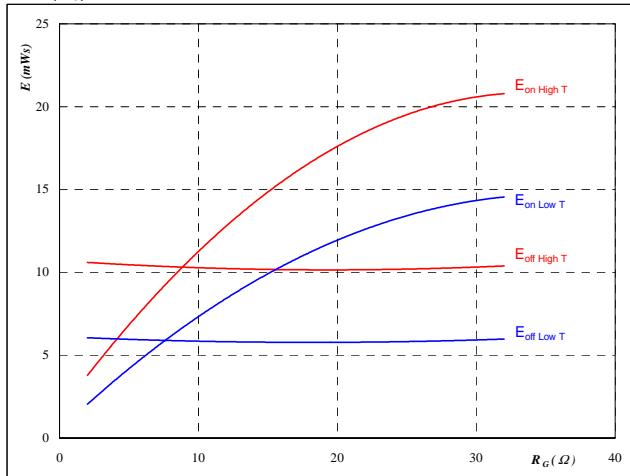


With an inductive load at

$$\begin{aligned} T_j &= 25/150 \quad ^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ I_C &= 101 \quad \text{A} \end{aligned}$$

Figure 7
Output inverter FWD

Typical reverse recovery energy loss
as a function of collector current

$$E_{rec} = f(I_C)$$

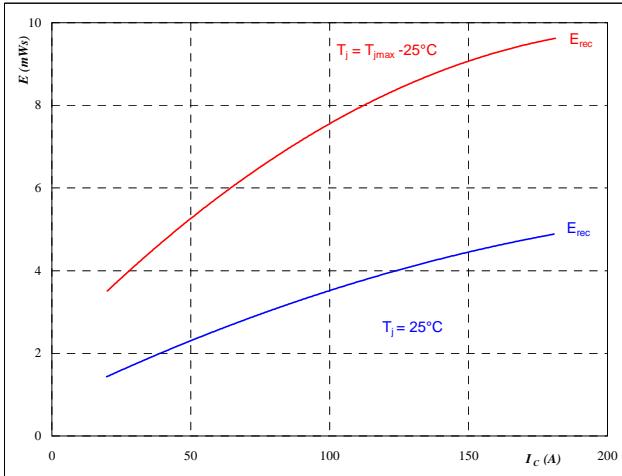


With an inductive load at

$$\begin{aligned} T_j &= 25/150 \quad ^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ R_{gon} &= 8 \quad \Omega \end{aligned}$$

Figure 8
Output inverter FWD

Typical reverse recovery energy loss
as a function of gate resistor

$$E_{rec} = f(R_G)$$

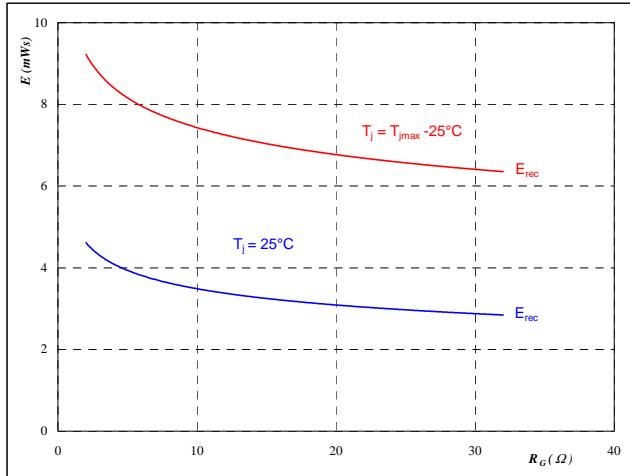

With an inductive load at


$$\begin{aligned} T_j &= 25/150 \quad ^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ I_C &= 101 \quad \text{A} \end{aligned}$$

Output Inverter

Figure 9

Typical switching times as a function of collector current

$$t = f(I_C)$$

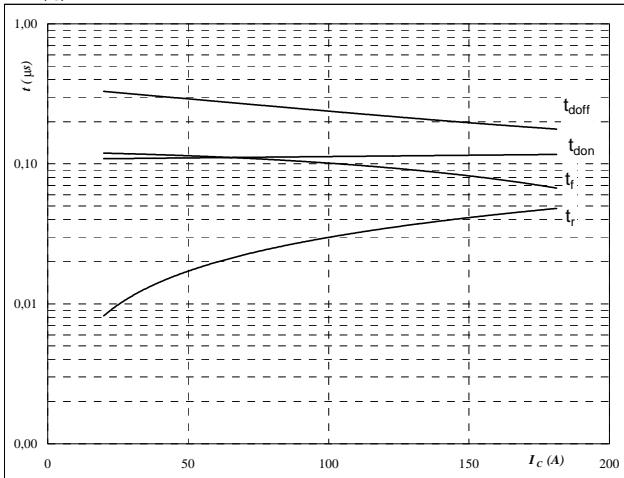

With an inductive load at


T _j =	150	°C
V _{CE} =	600	V
V _{GE} =	±15	V
R _{gon} =	8	Ω
R _{goff} =	8	Ω

Figure 11

Output inverter FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

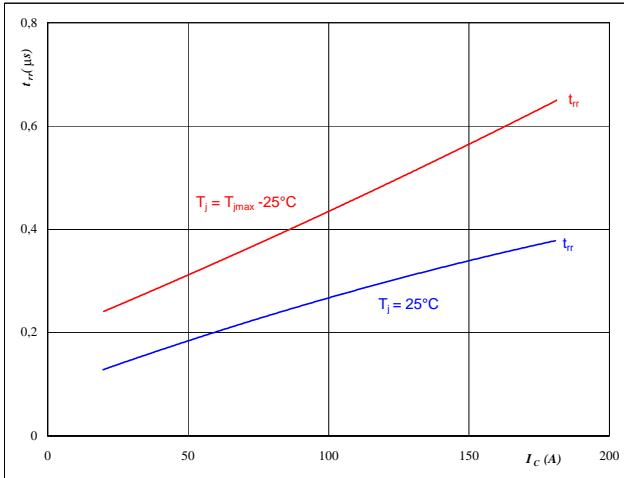

At


T _j =	25/150	°C
V _{CE} =	600	V
V _{GE} =	±15	V
R _{gon} =	8	Ω

Figure 10

Output inverter IGBT

Typical switching times as a function of gate resistor

$$t = f(R_G)$$

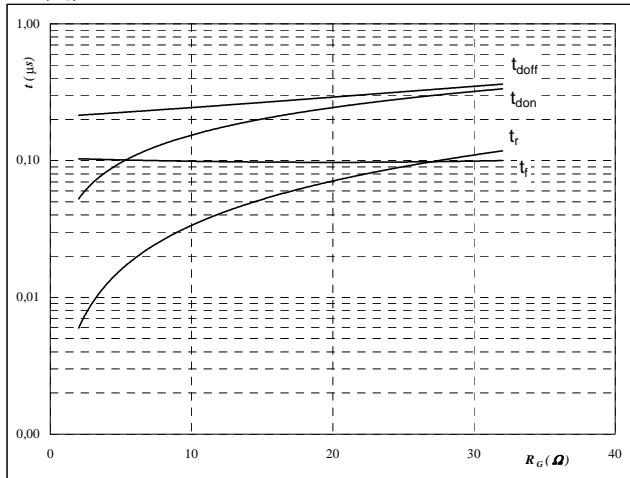

With an inductive load at


T _j =	150	°C
V _{CE} =	600	V
V _{GE} =	±15	V
I _C =	101	A

Figure 12

Output inverter FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

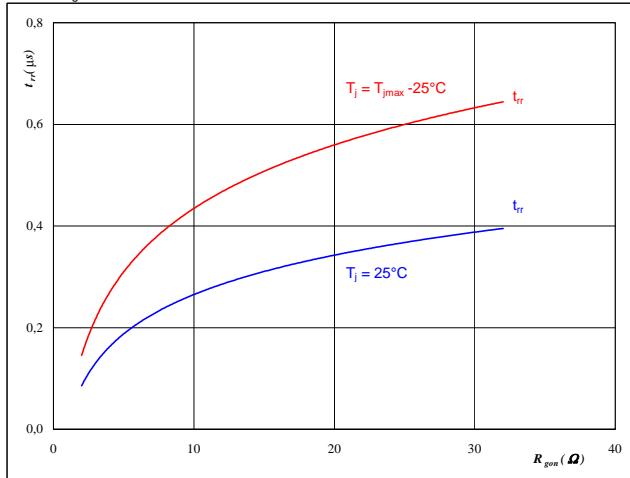

At


T _j =	25/150	°C
V _R =	600	V
I _F =	101	A
V _{GE} =	±15	V

Output Inverter

Figure 13

Typical reverse recovery charge as a function of collector current

$$Q_{rr} = f(I_C)$$

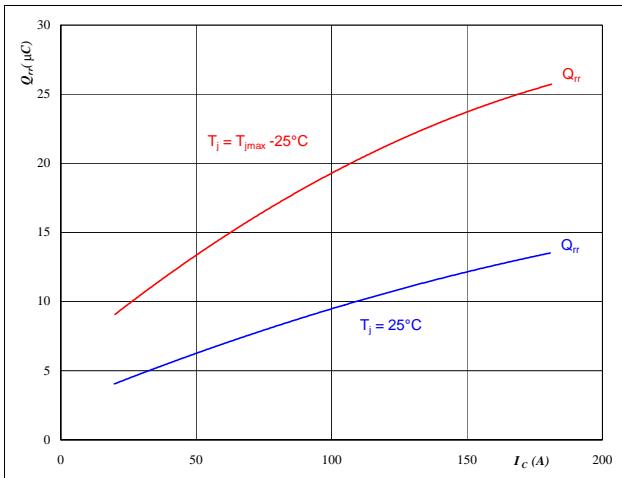

At

$$\begin{aligned} T_j &= 25/150 \quad {}^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ R_{gon} &= 8 \quad \Omega \end{aligned}$$

Figure 15

Typical reverse recovery current as a function of collector current

$$I_{RRM} = f(I_C)$$

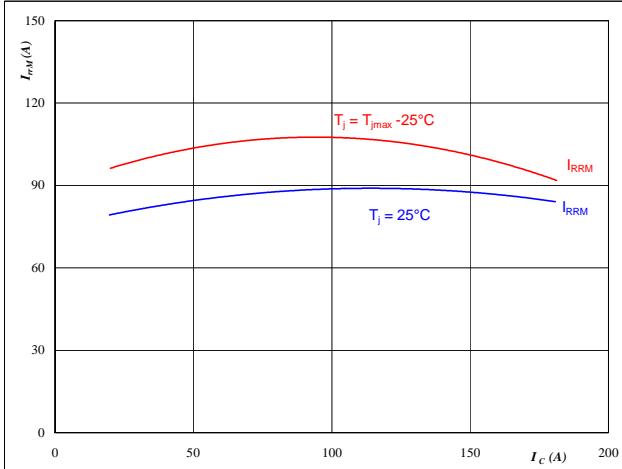

At

$$\begin{aligned} T_j &= 25/150 \quad {}^\circ\text{C} \\ V_{CE} &= 600 \quad \text{V} \\ V_{GE} &= \pm 15 \quad \text{V} \\ R_{gon} &= 8 \quad \Omega \end{aligned}$$

Figure 14

Typical reverse recovery charge as a function of IGBT turn on gate resistor

$$Q_{rr} = f(R_{gon})$$

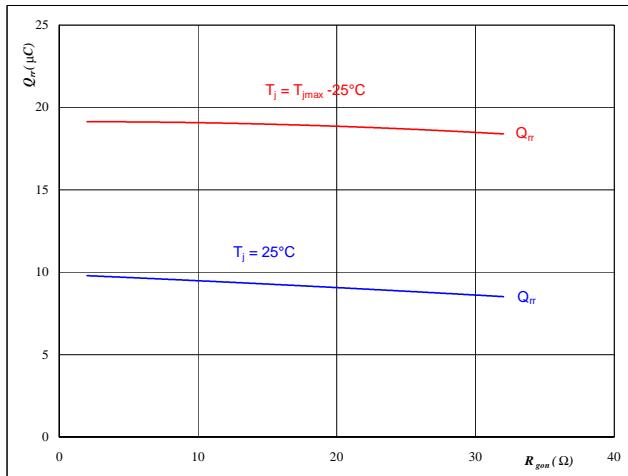

At

$$\begin{aligned} T_j &= 25/150 \quad {}^\circ\text{C} \\ V_R &= 600 \quad \text{V} \\ I_F &= 101 \quad \text{A} \\ V_{GE} &= \pm 15 \quad \text{V} \end{aligned}$$

Figure 15

Typical reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RRM} = f(R_{gon})$$

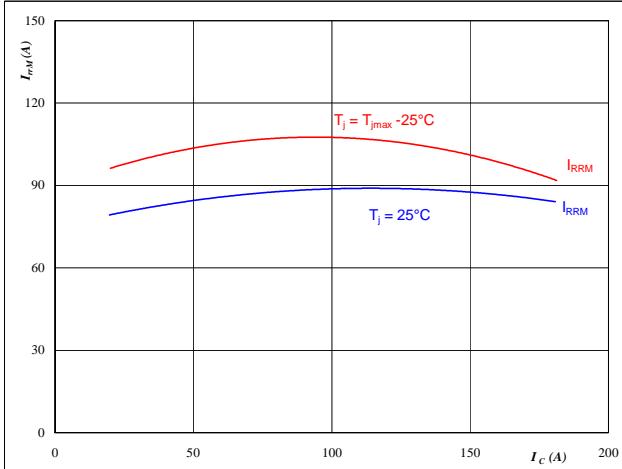

At

$$\begin{aligned} T_j &= 25/150 \quad {}^\circ\text{C} \\ V_R &= 600 \quad \text{V} \\ I_F &= 101 \quad \text{A} \\ V_{GE} &= \pm 15 \quad \text{V} \end{aligned}$$

Output Inverter

Figure 17 Output inverter FWD

Typical rate of fall of forward
and reverse recovery current as a
function of collector current
 $dI_0/dt, dI_{rec}/dt = f(I_C)$

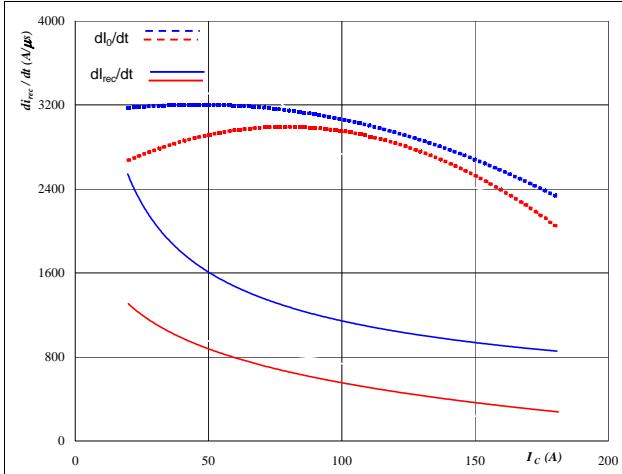


At

$T_j = 25/150$ °C
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 8$ Ω

Figure 18 Output inverter FWD

Typical rate of fall of forward
and reverse recovery current as a
function of IGBT turn on gate resistor
 $dI_0/dt, dI_{rec}/dt = f(R_{gon})$

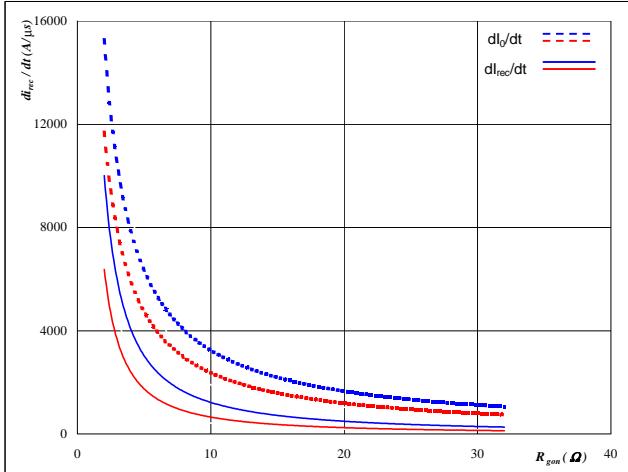


At

$T_j = 25/150$ °C
 $V_R = 600$ V
 $I_F = 101$ A
 $V_{GE} = \pm 15$ V

Figure 19 Output inverter IGBT

IGBT transient thermal impedance
as a function of pulse width
 $Z_{thJH} = f(t_p)$

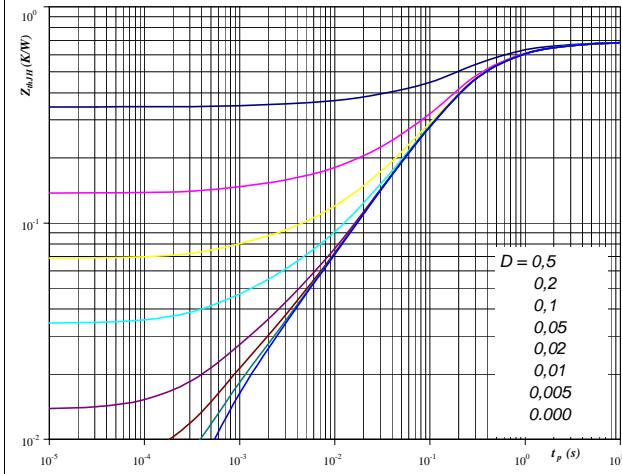

At


$D = t_p / T$
 $R_{thJH} = 0.69$ K/W

IGBT thermal model values

Thermal grease		Phase change interface	
R (C/W)	Tau (s)	R (C/W)	Tau (s)
0,04	4,8E+00	0,03	3,9E+00
0,11	1,1E+00	0,09	8,6E-01
0,33	2,5E-01	0,26	2,0E-01
0,14	9,4E-02	0,12	7,6E-02
0,05	1,3E-02	0,04	1,0E-02
0,02	1,0E-03	0,01	8,5E-04

Figure 20 Output inverter FWD

FWD transient thermal impedance
as a function of pulse width
 $Z_{thJH} = f(t_p)$

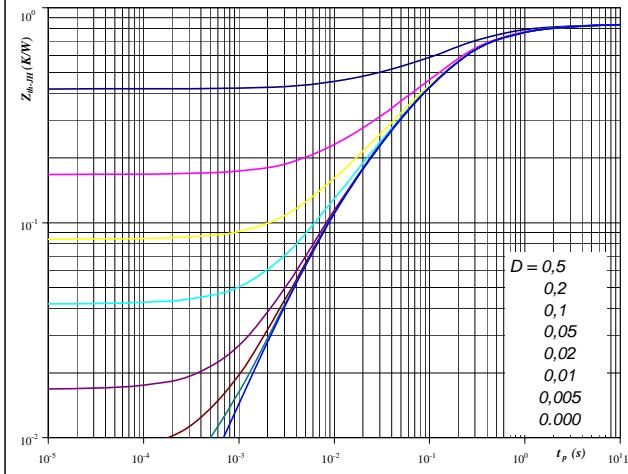

At

$D = t_p / T$
 $R_{thJH} = 0,84$ K/W

FWD thermal model values

Thermal grease		Phase change interface	
R (C/W)	Tau (s)	R (C/W)	Tau (s)
0,04	4,8E+00	0,03	3,9E+00
0,11	8,9E-01	0,09	7,3E-01
0,43	1,9E-01	0,35	1,5E-01
0,17	4,8E-02	0,14	3,9E-02
0,08	9,3E-03	0,07	7,5E-03

Output Inverter

Figure 21

Power dissipation as a function of heatsink temperature

$$P_{\text{tot}} = f(T_h)$$



At

T_j = 175 °C

Output inverter IGBT
Figure 22

Collector current as a function of heatsink temperature

$$I_C = f(T_h)$$

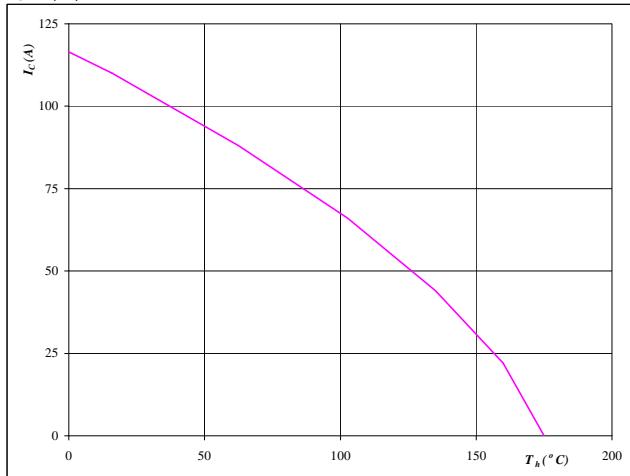

At

T_j = 175 °C

Output inverter IGBT
Figure 23
Output inverter FWD

Power dissipation as a function of heatsink temperature

$$P_{\text{tot}} = f(T_h)$$

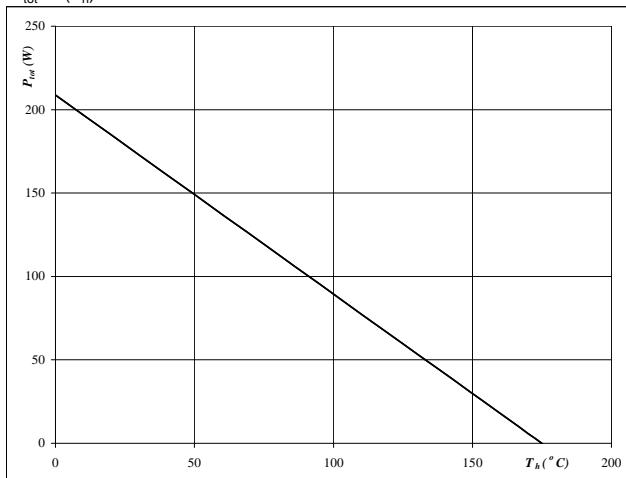

At

T_j = 175 °C

Figure 24
Output inverter FWD

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

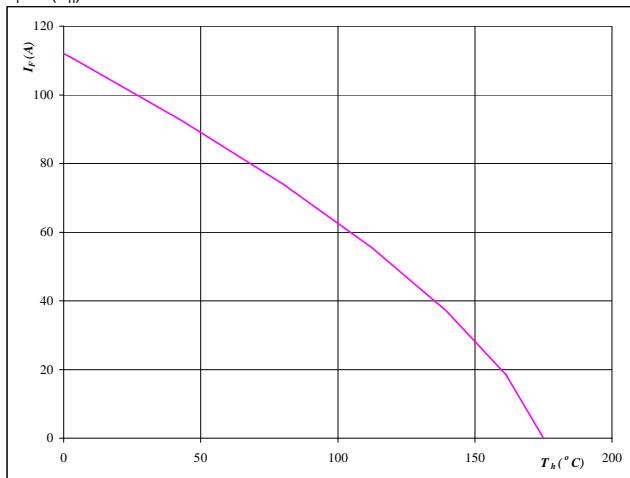
At


T_j = 175 °C

Output Inverter

Figure 25 Output inverter IGBT

Safe operating area as a function
of collector-emitter voltage

$$I_C = f(V_{CE})$$

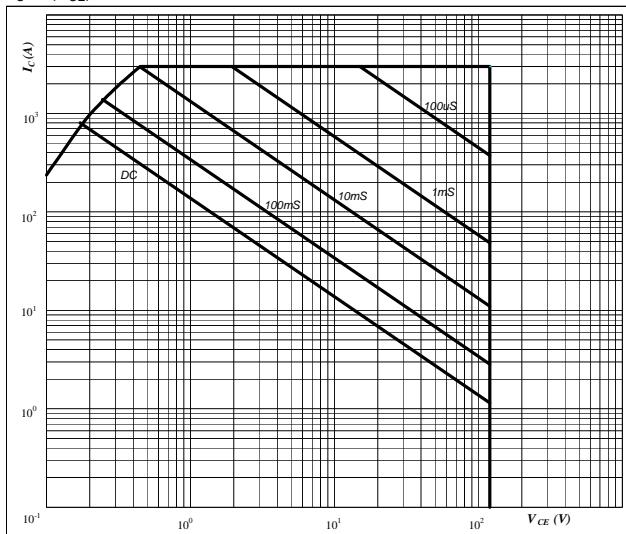
At

D = single pulse

T_h = 80 °C


V_{GE} = ±15 V

T_j = T_{jmax} °C

Figure 26 Output inverter IGBT

Gate voltage vs Gate charge

$$V_{GE} = f(Q_{GE})$$

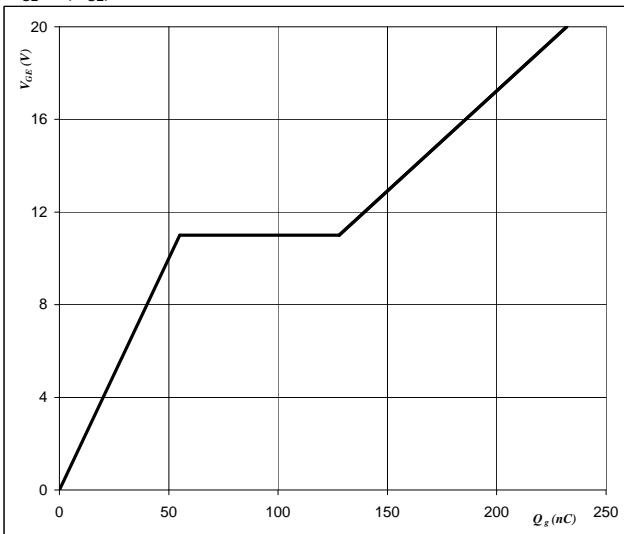
At


I_C = 101 A

V_{CC} = 600 V

Figure 27 Output inverter IGBT

Short circuit withstand time as a function of
gate-emitter voltage

$$t_{sc} = f(V_{GE})$$

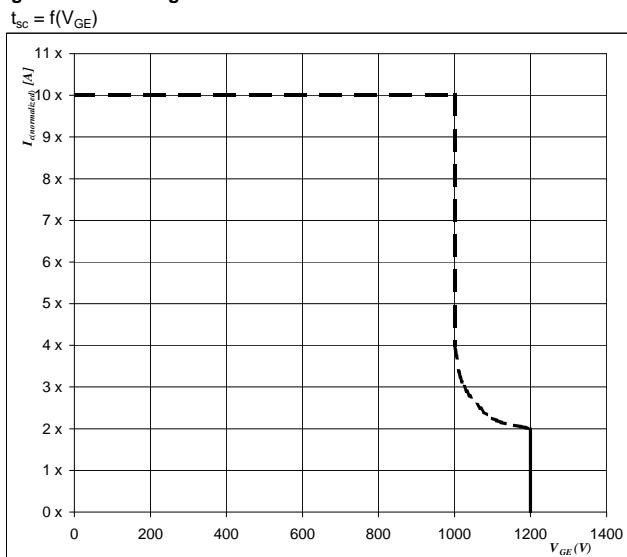
At


V_{CE} = 1200 V

T_j ≤ 175 °C

Figure 28 Output inverter IGBT

Typical short circuit collector current as a function of
gate-emitter voltage


$$V_{GE} = f(Q_{GE})$$

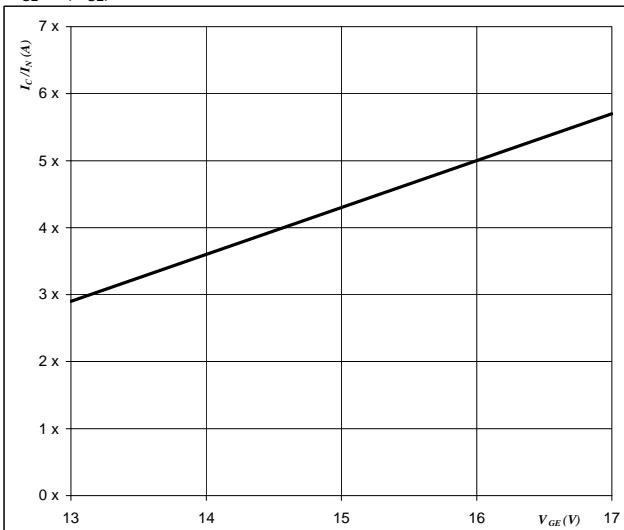
At

V_{CE} ≤ 1200 V

T_j = 175 °C

Figure 29
Reverse bias safe operating area

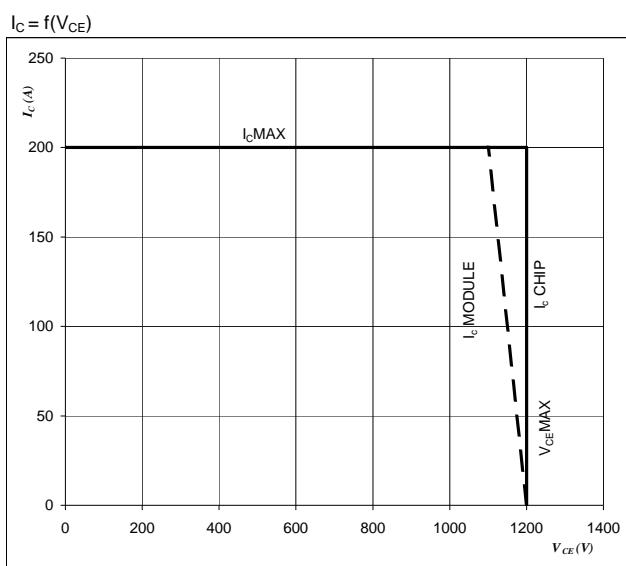


At
 $T_j = T_{jmax} - 25 \text{ } ^\circ\text{C}$
 $U_{ccminus} = U_{ccplus}$

Switching mode : 3 level switching


Brake

Figure 1
Typical output characteristics
 $I_C = f(V_{CE})$

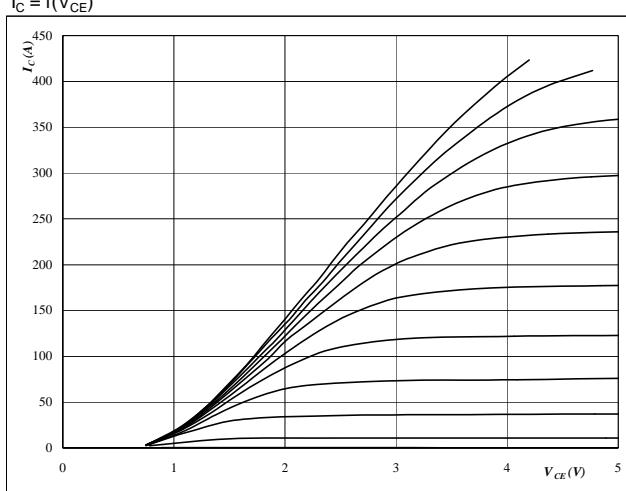


At
 $t_p = 250 \mu s$
 $T_j = 25^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2
Typical output characteristics
 $I_C = f(V_{CE})$

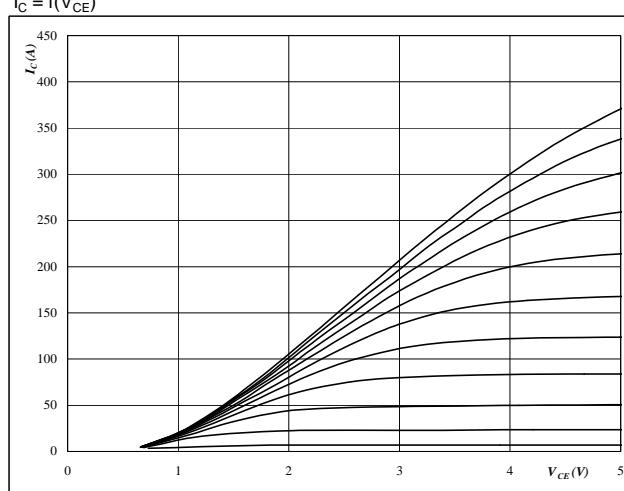


At
 $t_p = 250 \mu s$
 $T_j = 150^\circ C$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3
Typical transfer characteristics
 $I_C = f(V_{GE})$

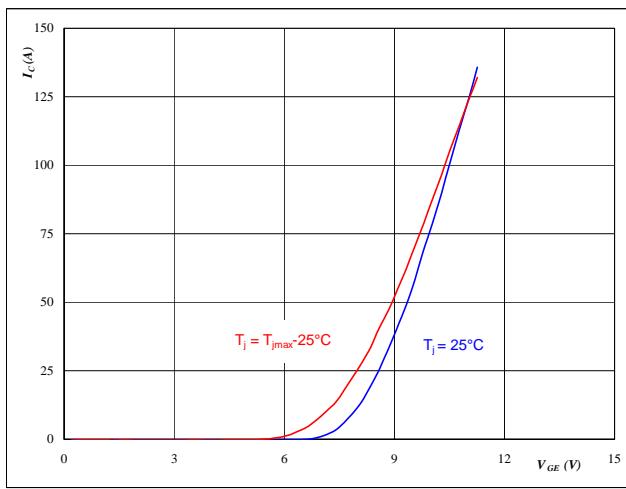

At
 $t_p = 250 \mu s$
 $V_{CE} = 10 V$


Figure 4
Typical diode forward current as a function of forward voltage
 $I_F = f(V_F)$

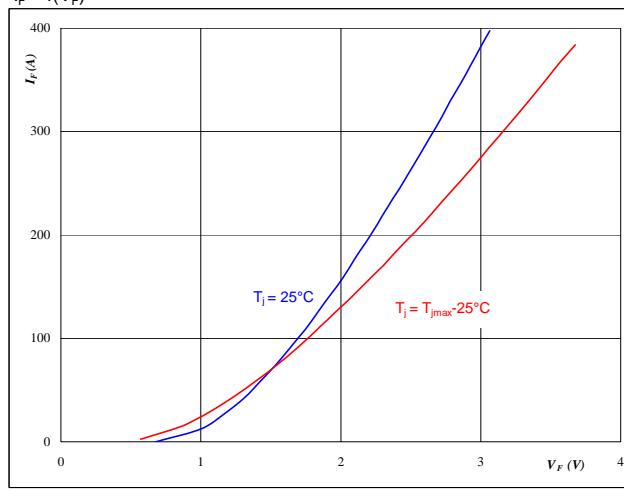

At
 $t_p = 250 \mu s$

Brake

Figure 5
Typical switching energy losses as a function of collector current
 $E = f(I_C)$

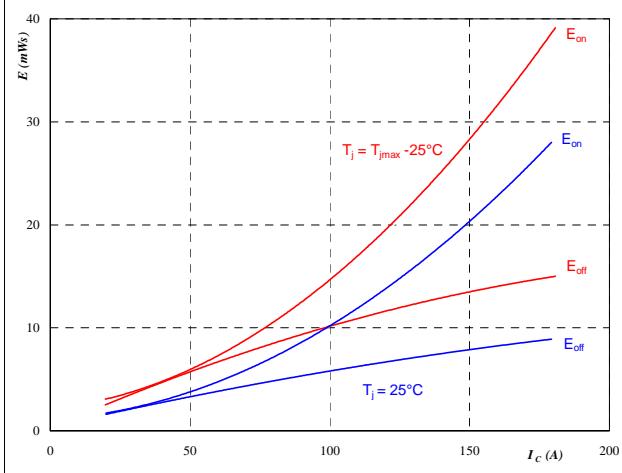


With an inductive load at

$T_j = 25/150 \quad ^\circ\text{C}$
 $V_{CE} = 600 \quad \text{V}$
 $V_{GE} = \pm 15 \quad \text{V}$
 $R_{gon} = 8 \quad \Omega$
 $R_{goff} = 8 \quad \Omega$

Brake IGBT


Figure 6
Typical switching energy losses as a function of gate resistor
 $E = f(R_G)$

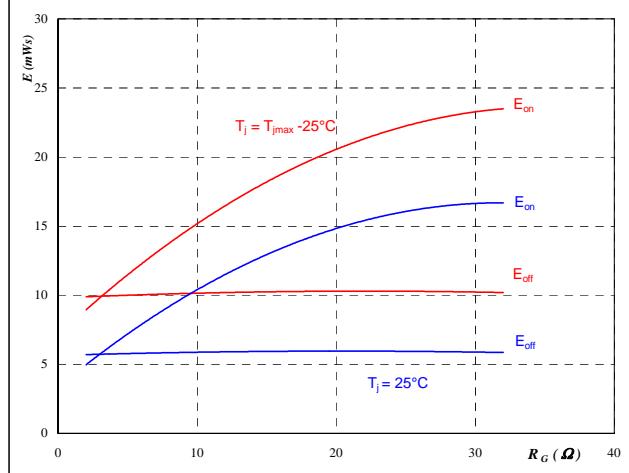

With an inductive load at

$T_j = 25/150 \quad ^\circ\text{C}$
 $V_{CE} = 600 \quad \text{V}$
 $V_{GE} = \pm 15 \quad \text{V}$
 $I_C = 101 \quad \text{A}$

Figure 7
Typical reverse recovery energy loss as a function of collector current
 $E_{rec} = f(I_C)$

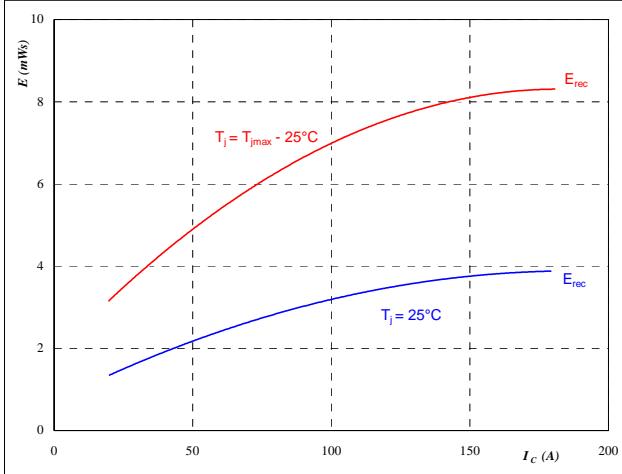


With an inductive load at

$T_j = 25/150 \quad ^\circ\text{C}$
 $V_{CE} = 600 \quad \text{V}$
 $V_{GE} = \pm 15 \quad \text{V}$
 $R_{gon} = 8 \quad \Omega$

Brake FWD

Figure 8
Typical reverse recovery energy loss as a function of gate resistor
 $E_{rec} = f(R_G)$

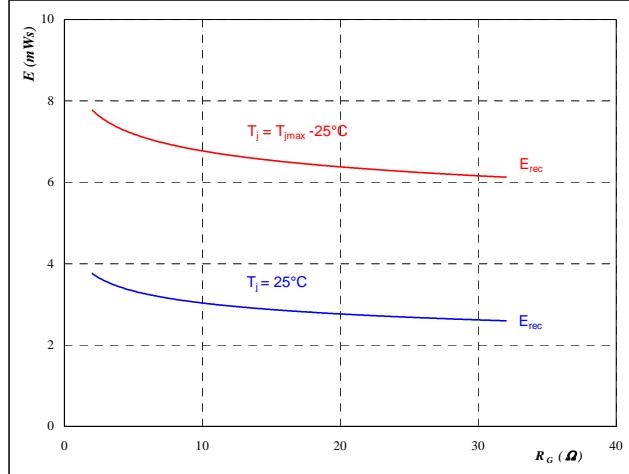


With an inductive load at

$T_j = 25/150 \quad ^\circ\text{C}$
 $V_{CE} = 600 \quad \text{V}$
 $V_{GE} = \pm 15 \quad \text{V}$
 $I_C = 101 \quad \text{A}$

Brake

Figure 9

Typical switching times as a function of collector current
 $t = f(I_C)$

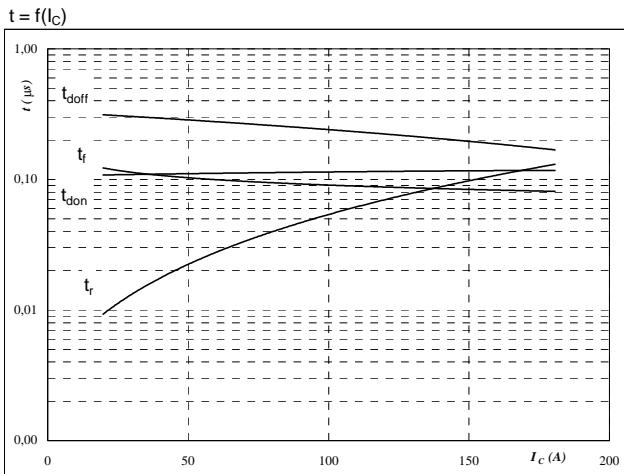


With an inductive load at

$T_j =$	25/150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	8	Ω
$R_{goff} =$	8	Ω

Brake IGBT
Figure 10

Typical switching times as a function of gate resistor
 $t = f(R_G)$

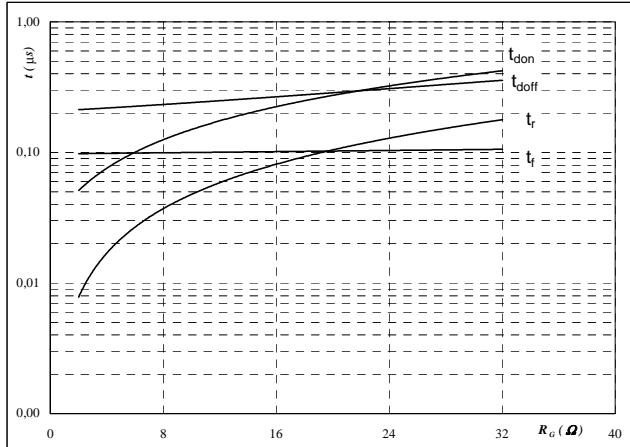


With an inductive load at

$T_j =$	25/150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_C =$	101	A

Figure 11

IGBT transient thermal impedance as a function of pulse width

$$Z_{thJH} = f(t_p)$$

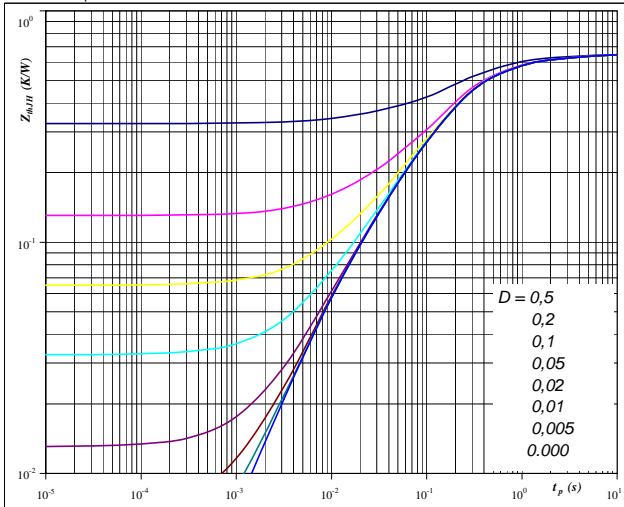


At Thermal grease $D =$

$R_{thJH} =$	0,651	K/W	$R_{thJH} =$	0,53	K/W
--------------	-------	-----	--------------	------	-----

Brake IGBT
Figure 12

FWD transient thermal impedance as a function of pulse width

$$Z_{thJH} = f(t_p)$$

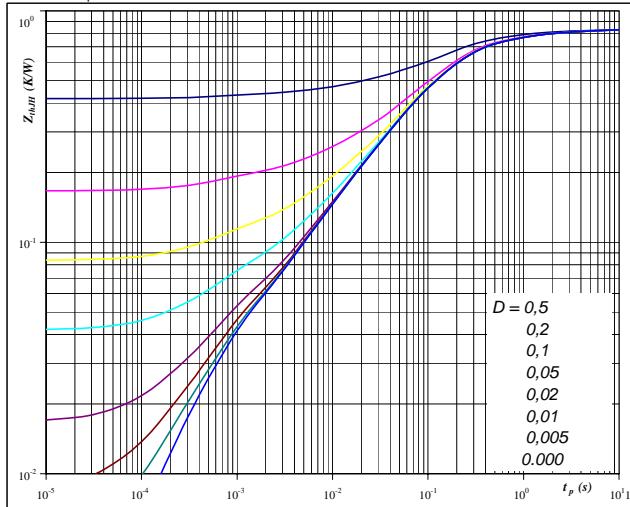


At Thermal grease $D =$

$R_{thJH} =$	0,83	K/W	$R_{thJH} =$	0,68	K/W
--------------	------	-----	--------------	------	-----

Brake


Figure 13
Power dissipation as a function of heatsink temperature
 $P_{\text{tot}} = f(T_h)$

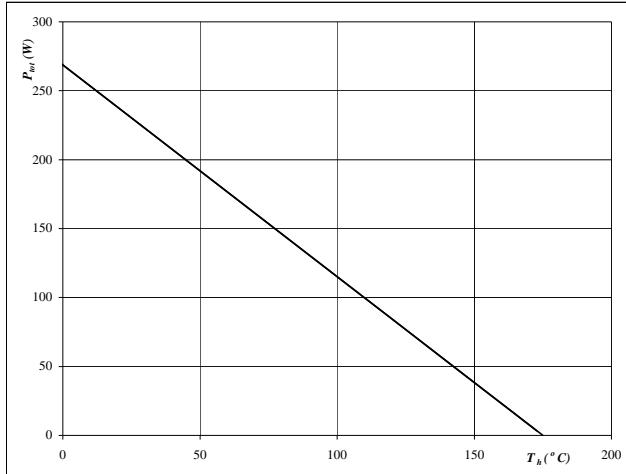

At
T_j = 175 °C

Brake IGBT

Figure 14
Collector current as a function of heatsink temperature
 $I_C = f(T_h)$

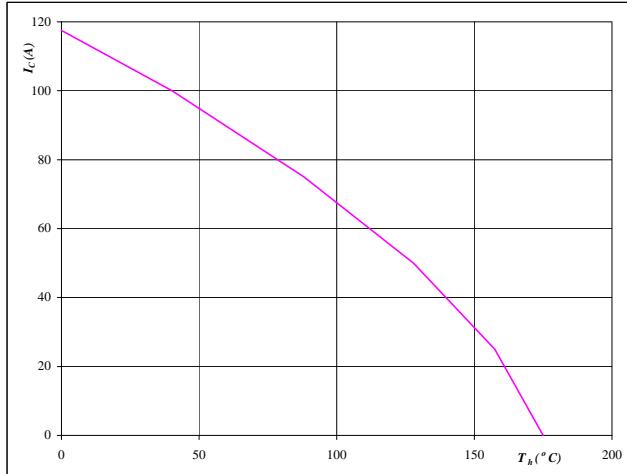

At
T_j = 175 °C
V_{GE} = 15 V


Figure 15
Power dissipation as a function of heatsink temperature
 $P_{\text{tot}} = f(T_h)$



At
T_j = 175 °C

Brake FWD

Figure 16
Forward current as a function of heatsink temperature
 $I_F = f(T_h)$

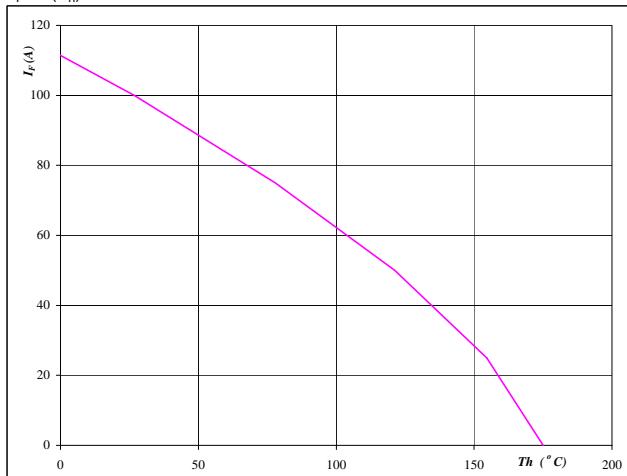


At
T_j = 175 °C

Input Rectifier Bridge

Figure 1

Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

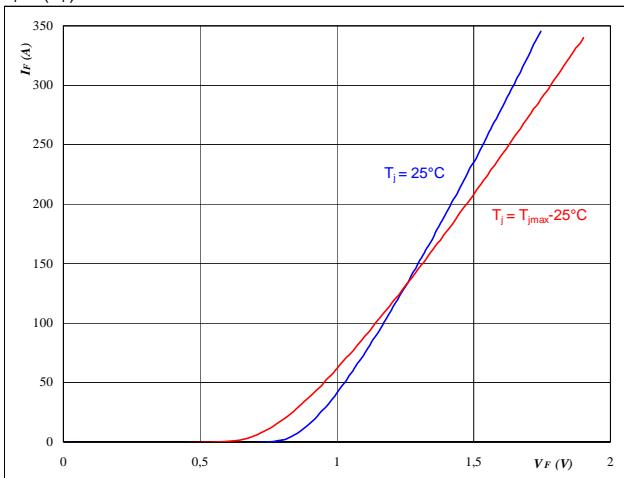

At

$$t_p = 250 \mu\text{s}$$

Rectifier diode
Figure 2

Diode transient thermal impedance as a function of pulse width

$$Z_{thJH} = f(t_p)$$

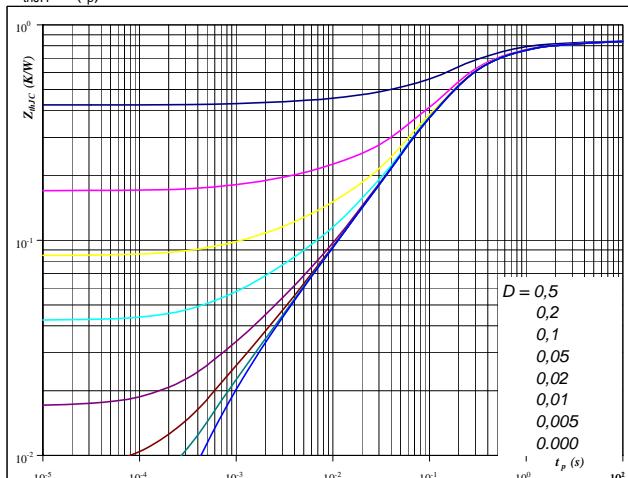
At


$$D = t_p / T$$

$$R_{thJH} = 0.849 \text{ K/W}$$

Figure 3

Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

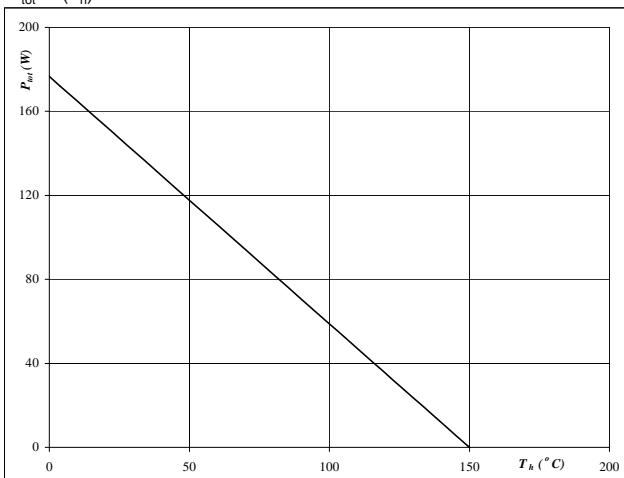

At

$$T_j = 150^\circ\text{C}$$

Rectifier diode
Figure 4

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

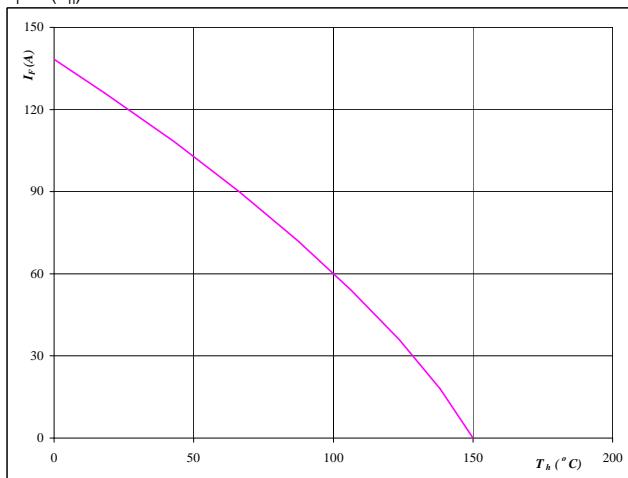
At

$$T_j = 150^\circ\text{C}$$


Thermistor

Figure 1

Thermistor

Typical NTC characteristic
as a function of temperature

$$R_T = f(T)$$

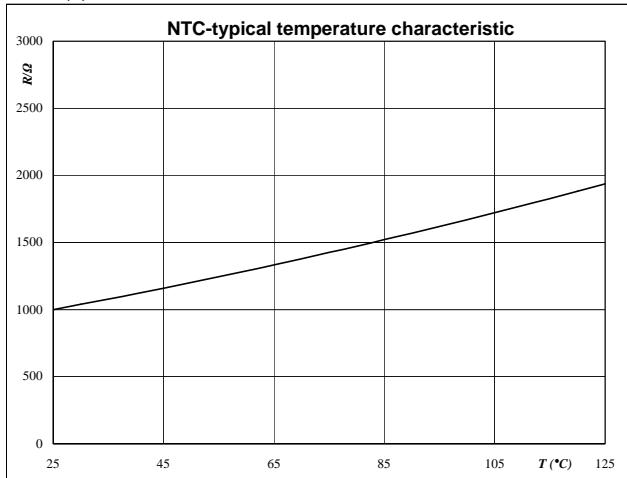


Switching Definitions Output Inverter

General conditions

T_j	=	150 °C
R_{gon}	=	8 Ω
R_{goff}	=	8 Ω

Figure 1


Output inverter IGBT

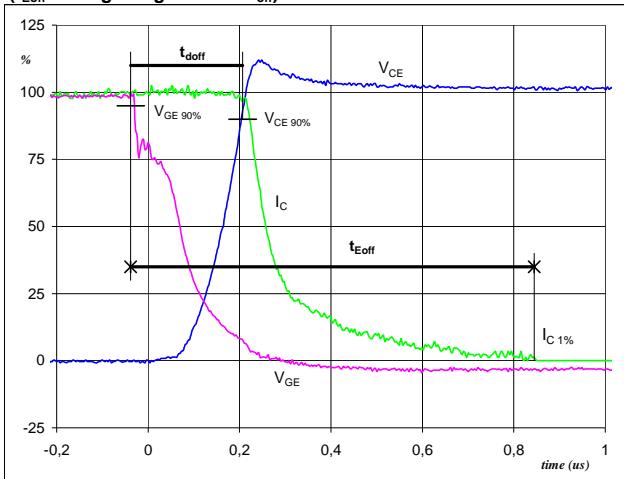Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff}
(t_{Eoff} = integrating time for E_{off})


$V_{GE\ (0\%)} =$	-15	V
$V_{GE\ (100\%)} =$	15	V
$V_C\ (100\%) =$	600	V
$I_C\ (100\%) =$	100	A
$t_{doff} =$	0,23	μs
$t_{Eoff} =$	0,88	μs

Figure 2


Output inverter IGBT

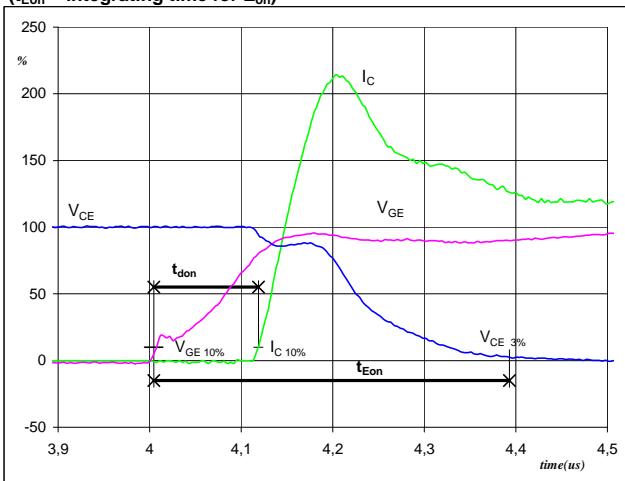Turn-on Switching Waveforms & definition of t_{don} , t_{Eon}
(t_{Eon} = integrating time for E_{on})


$V_{GE\ (0\%)} =$	-15	V
$V_{GE\ (100\%)} =$	15	V
$V_C\ (100\%) =$	600	V
$I_C\ (100\%) =$	100	A
$t_{don} =$	0,11	μs
$t_{Eon} =$	0,39	μs

Figure 3


Output inverter IGBT

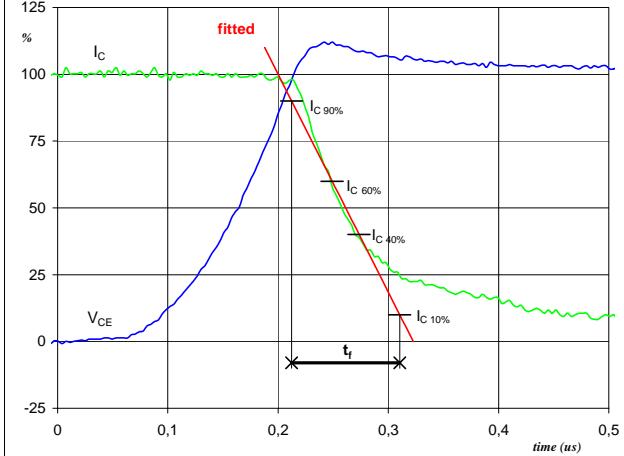Turn-off Switching Waveforms & definition of t_f


$V_C\ (100\%) =$	600	V
$I_C\ (100\%) =$	100	A
$t_f =$	0,10	μs

Figure 4


Output inverter IGBT

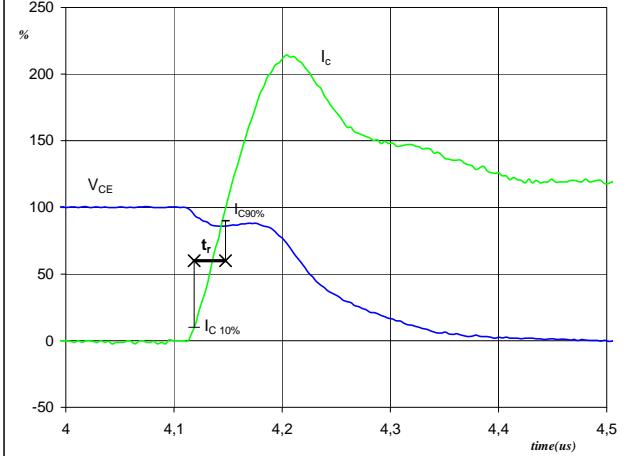Turn-on Switching Waveforms & definition of t_r


$V_C\ (100\%) =$	600	V
$I_C\ (100\%) =$	100	A
$t_r =$	0,03	μs


Switching Definitions Output Inverter

Figure 5 Output inverter IGBT
Turn-off Switching Waveforms & definition of t_{Eoff}

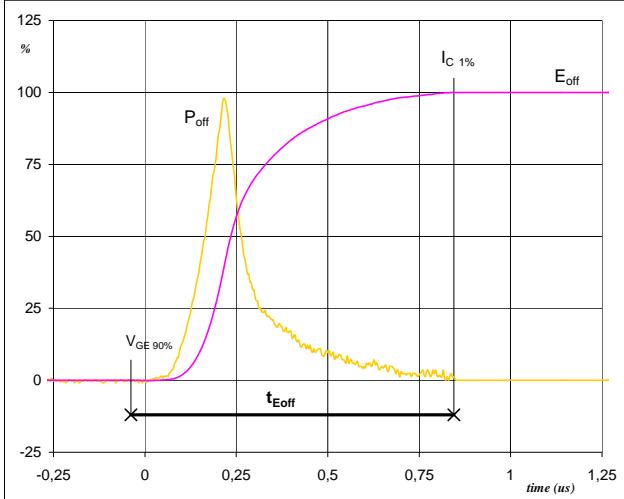


P_{off} (100%) = 59,89 kW
 E_{off} (100%) = 9,66 mJ
 t_{Eoff} = 0,88 μ s

Figure 6 Output inverter IGBT
Turn-on Switching Waveforms & definition of t_{Eon}

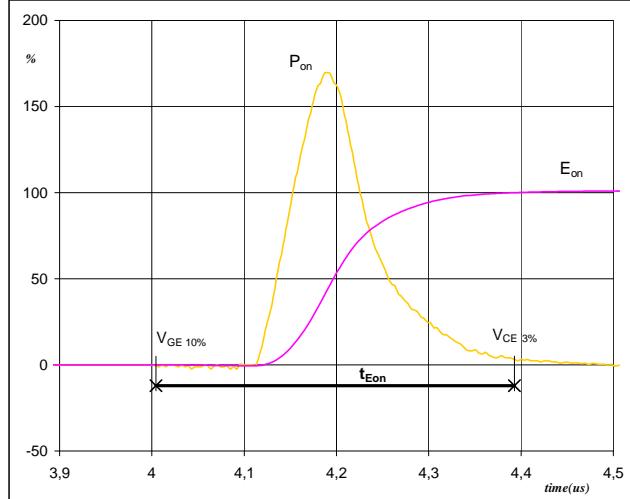


P_{on} (100%) = 59,89 kW
 E_{on} (100%) = 10,41 mJ
 t_{Eon} = 0,39 μ s

Figure 7 Output inverter FWD
Gate voltage vs Gate charge (measured)

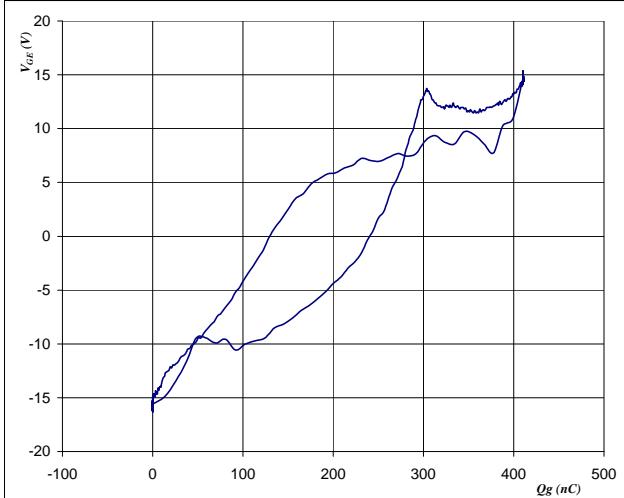

V_{GEoff} = -15 V
 V_{GEon} = 15 V
 V_C (100%) = 600 V
 I_C (100%) = 100 A
 Q_g = 410,72 nC

Figure 8 Output inverter IGBT
Turn-off Switching Waveforms & definition of t_{rr}

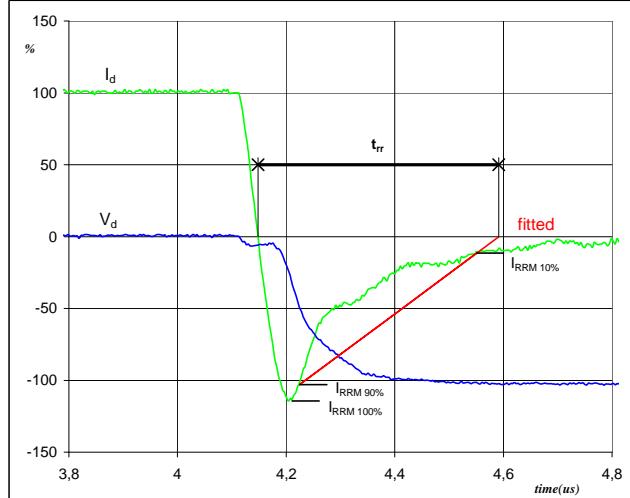


V_d (100%) = 600 V
 I_d (100%) = 100 A
 I_{RRM} (100%) = -113 A
 t_{rr} = 0,43 μ s

Switching Definitions Output Inverter

Figure 9

Output inverter FWD

Turn-on Switching Waveforms & definition of t_{Qrr}
(t_{Qrr} = integrating time for Q_{rr})

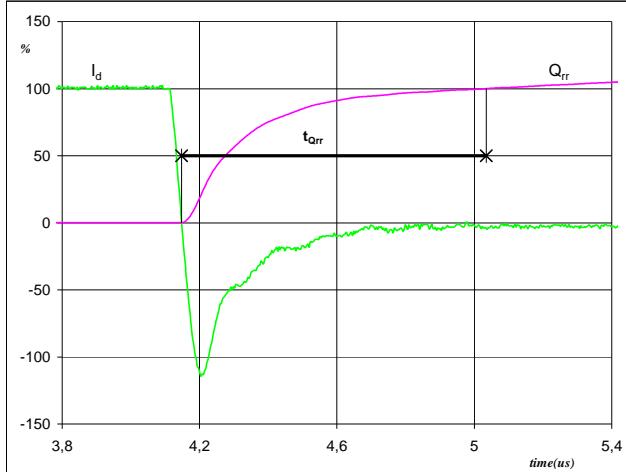


$$\begin{aligned} I_d(100\%) &= 100 \quad \text{A} \\ Q_{rr}(100\%) &= 19,38 \quad \mu\text{C} \\ t_{Qrr} &= 0,89 \quad \mu\text{s} \end{aligned}$$

Figure 10

Output inverter FWD

Turn-on Switching Waveforms & definition of t_{Erec}
(t_{Erec} = integrating time for E_{rec})

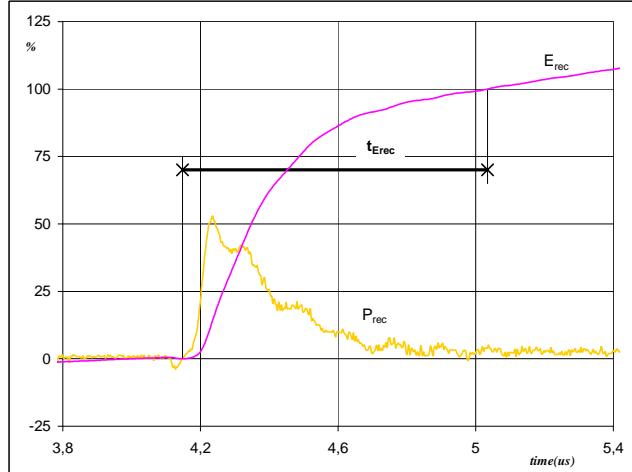



$$\begin{aligned} P_{rec}(100\%) &= 59,89 \quad \text{kW} \\ E_{rec}(100\%) &= 7,61 \quad \text{mJ} \\ t_{Erec} &= 0,89 \quad \mu\text{s} \end{aligned}$$

Ordering Code and Marking - Outline - Pinout


Ordering Code & Marking

Version	Ordering Code	in DataMatrix as	in packaging barcode as
with std lid (black V23990-K12-T-PM)	V23990-K420-A50-0A-PM	K420A50	K420A50-/0A/
with std lid (black V23990-K12-T-PM) and P12	V23990-K420-A50-1A-PM	K420A50	K420A50-/1A/
with thin lid (white V23990-K13-T-PM)	V23990-K420-A50-0B-PM	K420A50	K420A50-/0B/
with thin lid (white V23990-K13-T-PM) and P12	V23990-K420-A50-1B-PM	K420A50	K420A50-/1B/

Outline

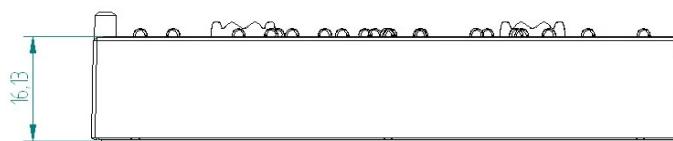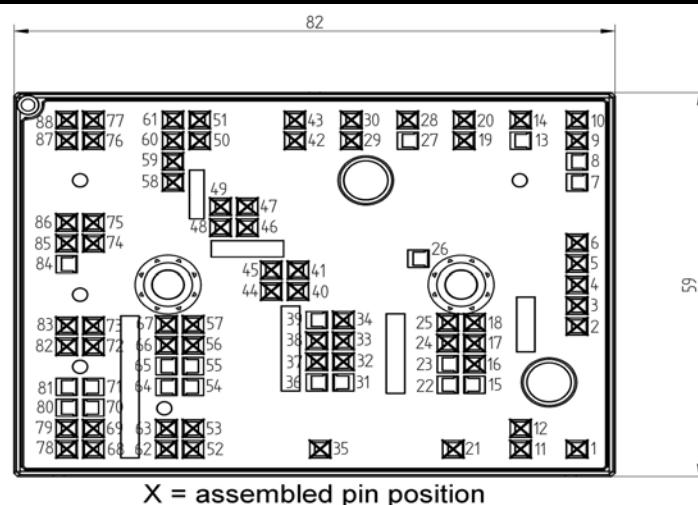

Pinout

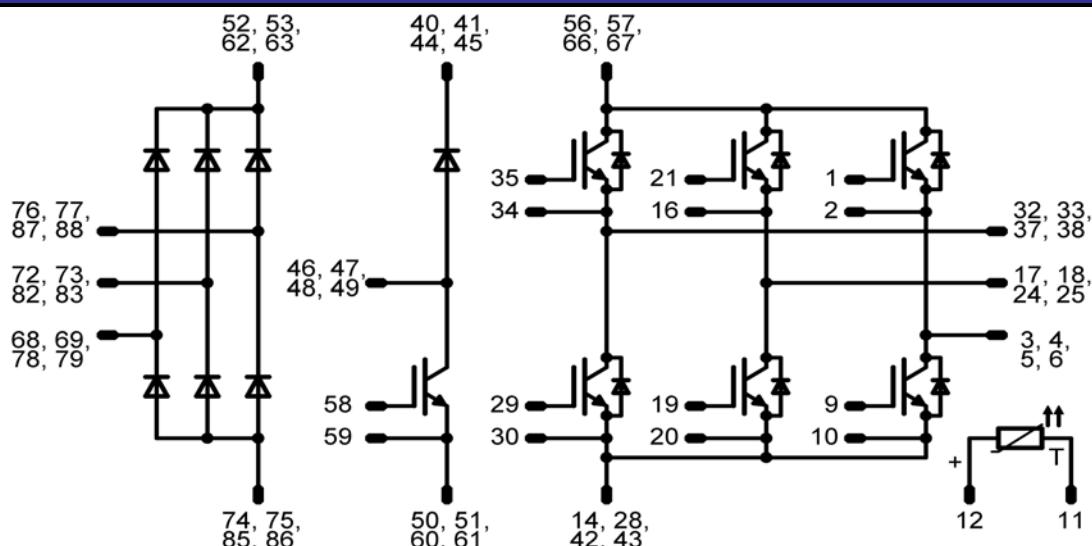

PRODUCT STATUS DEFINITIONS

Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data may be published at a later date. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.
Final	Full Production	This datasheet contains final specifications. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech. Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.