

SHINDENGEN

Power Switching Regulators


MA2000 Series

MA2440

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

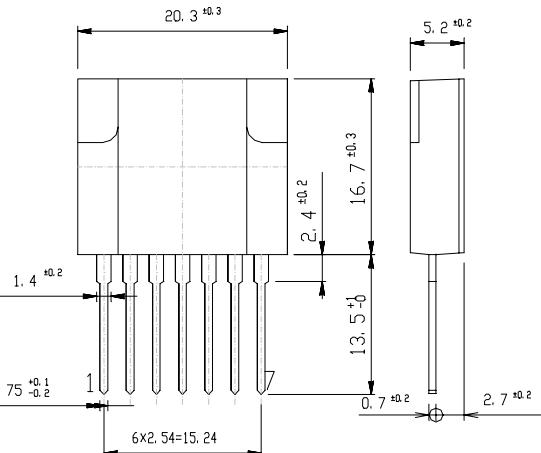

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	T _{stg}		-30 ~ 125	-30 ~ 125	°C
Operating Temperature	Top	Case Temperature	-20 ~ 125	-20 ~ 125	°C
Junction Temperature	T _j		150	150	°C
Peak Input Voltage	V _{in}	(2)+(4)-, Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEx} .	500	500	V
Input Current	I _{in}	Pulse Pulse Width 150 μs MAX, Duty 1/2, Sawtooth Wave, Peak Value, (2)+(4)-	10	10	A
Maximum Operating Frequency	f(max)		200	200	kH _Z
Maximum Power Dissipation	P _D	T _a =25°C	3	3	W
	P _D	Heatsink T _c =100°C	20	20	W
Dielectric Strength	V _{dis}	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0 Ω Duty 1/2, (4),(7)	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	(4)-(6)+	100	100	mA

● Electrical Characteristics (T_c=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEx} V _{CE} =500V, Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEx} , (2)+(4)-	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h _{FE} V _{CE} = 5V, I _C = 4.0A, (2)+(4)-, (5)I _B	15 ~ 30	10 ~ 20	
	Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =4.0A, I _B =0.8A, (2)+(4)-, (5)I _B	MAX 1.0	MAX 1.0	V
	Thermal Resistance	θ _{jc} Junction to Case	MAX 2.5	MAX 2.5	°C/W
D1	Reverse Current	I _R V _R =450V, (1)+(2)-	MAX 10	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A, (1)-(2)+	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage	V _{D(sat)}	I _C =1.5A, I _B =0.3A, (5) +, (4) -	MIN 1.7	MIN 1.7	V
			MAX 2.3	MAX 2.3	

● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage	AC90~132	AC90~132		V
Output Nominal Wattage	80	80		W
Output Nominal Voltage	12	12		V
Output Nominal Current	6.5	6.5		A

● Standard Operating Condition•Standard Operating Characteristics ($T_a=25^\circ C$)

Item	Conditions	Ratings		Unit
		P Class	N Class	
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=6.5A$	12.0 ± 0.6	12.0 ± 0.6	V
Maximum Input Light Load Output Voltage	$V_{in}=132V, I_O=0.65A$	12.0 ± 0.6	12.0 ± 0.6	V
AC Input Voltage	$I_O=6.5A$	MAX 85	MAX 85	V
Over Current Protection	Foldback Current	$V_{in}=132V, V_O=10V$	MAX 11	MAX 11
	Short Circuit	$V_{in}=132V, R_O=0.5 \Omega$	Nodata To Any Device, Automatic Recovery.	–
Output Ripple Noise	$V_{in}=90\sim 132V, I_O=0.65\sim 6.5A$	MAX 150	MAX 150	mV P-P

Figure in ○=Terminal Sign

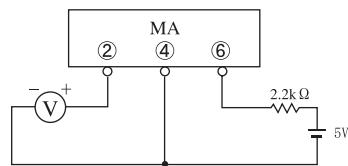


Fig1. Measurement Circuit






Fig2. Output Voltage/Current


MA2440 Transient Thermal Impedance

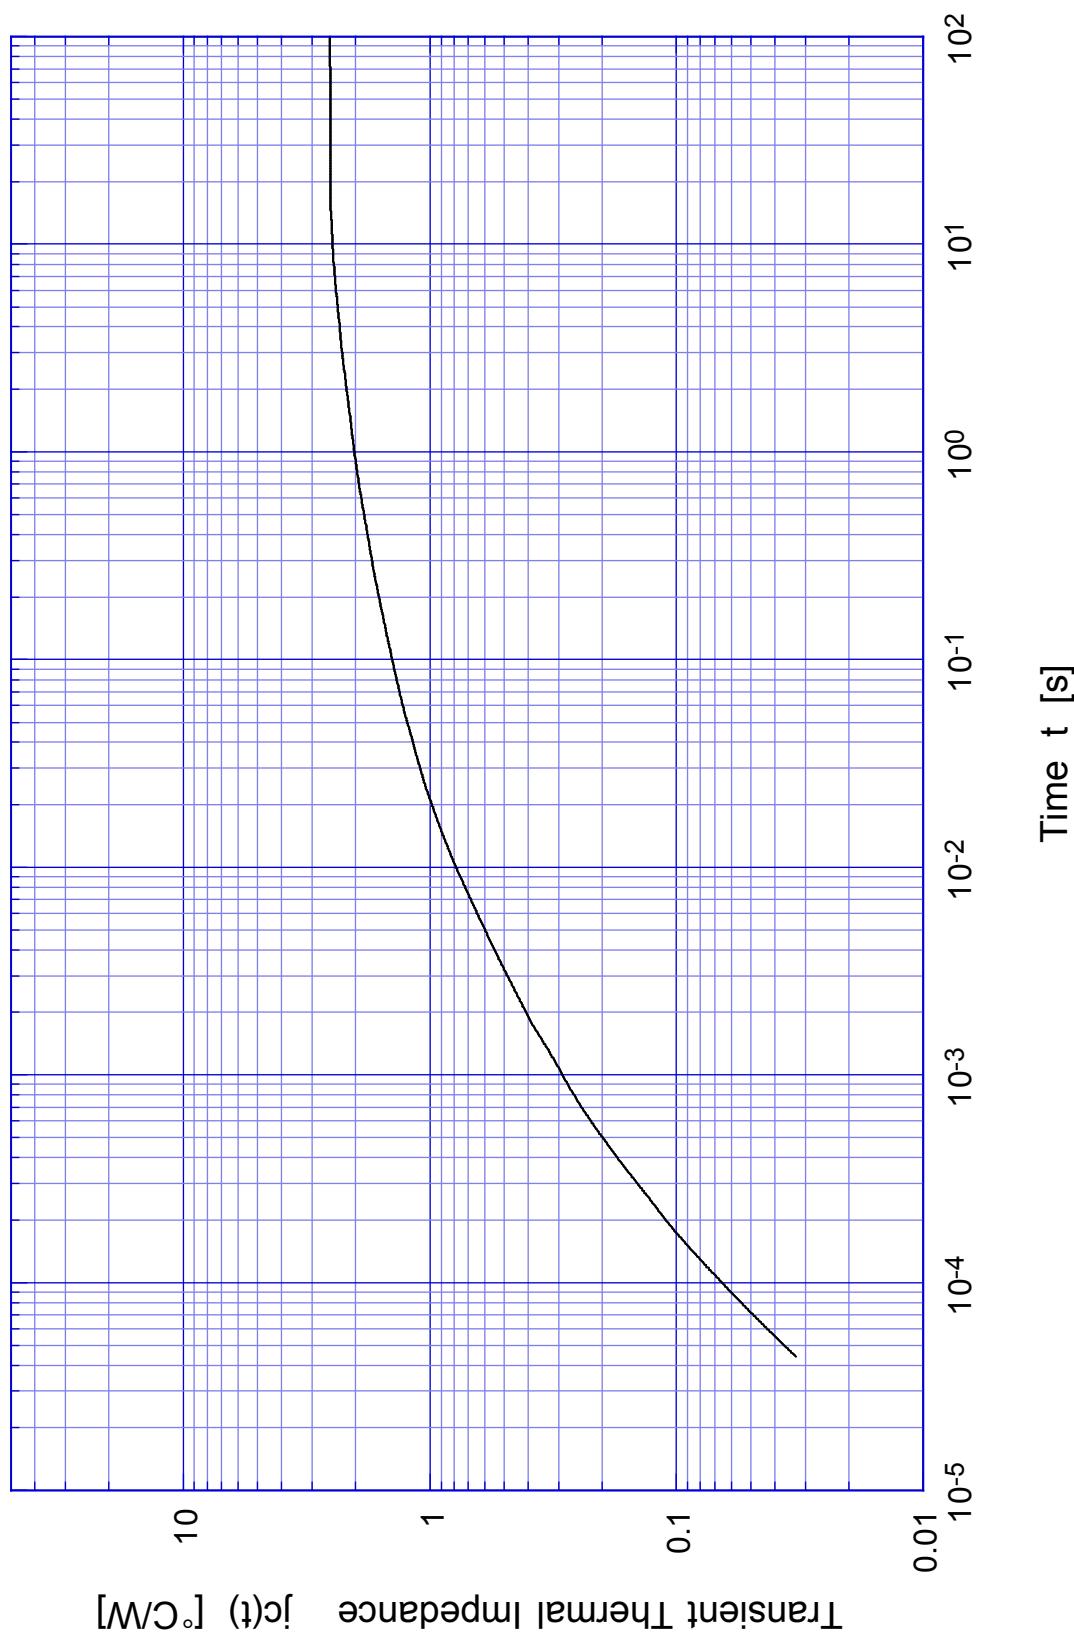

MA2440

Forward Bias SOA

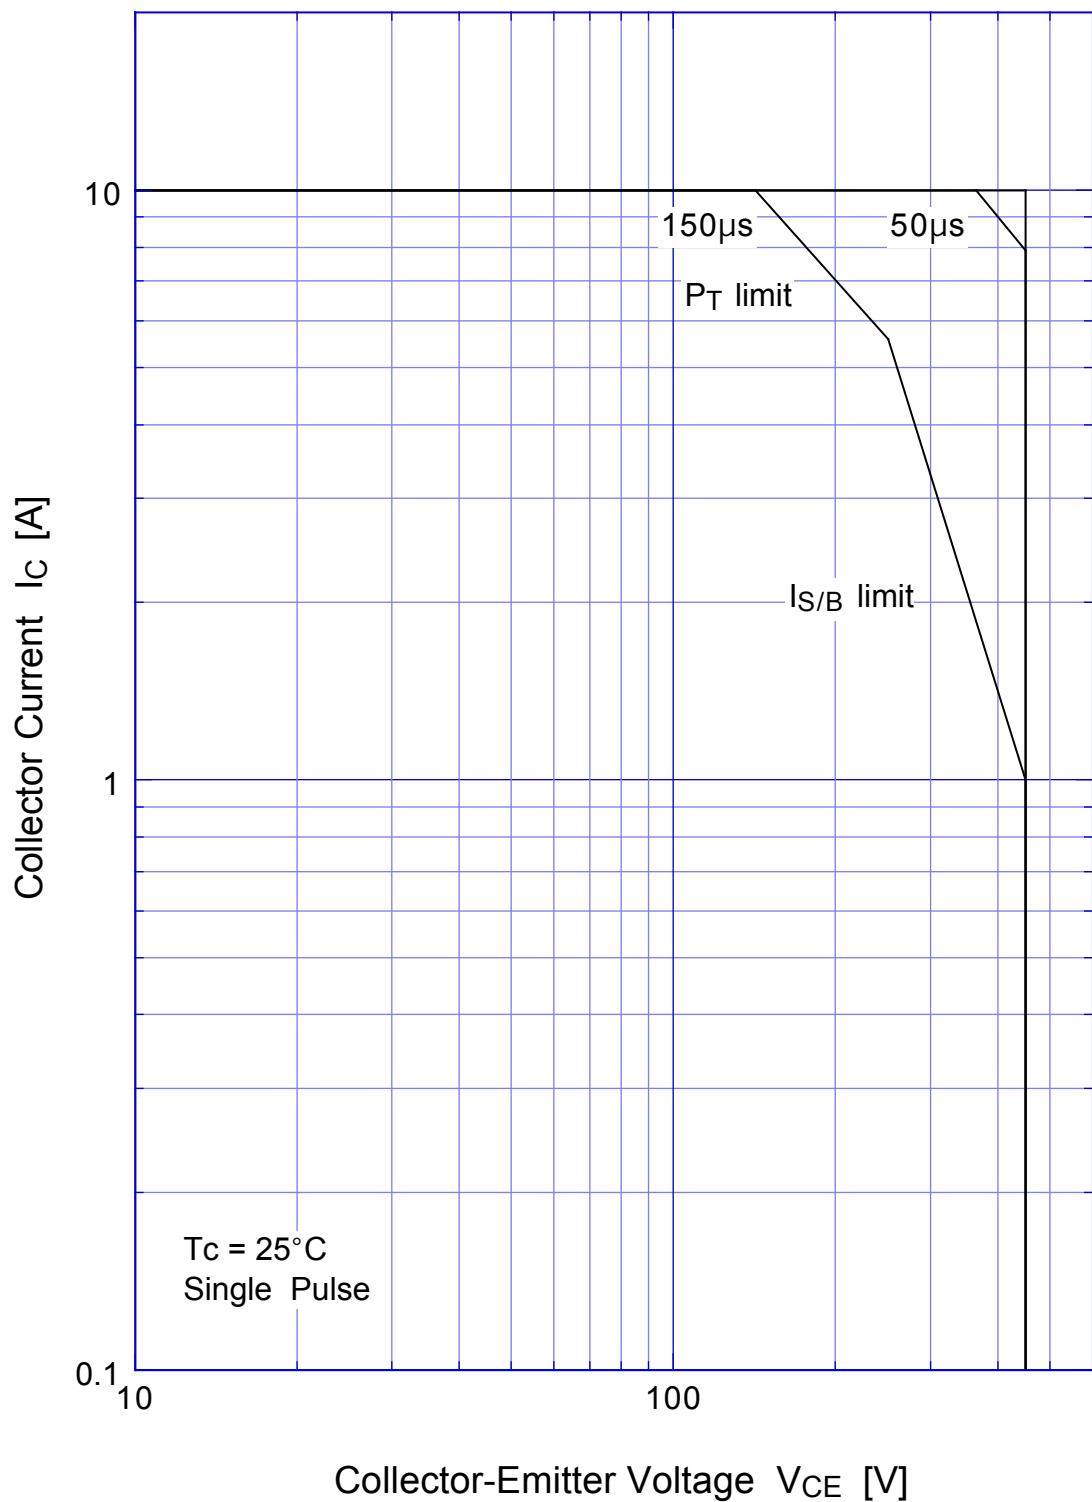

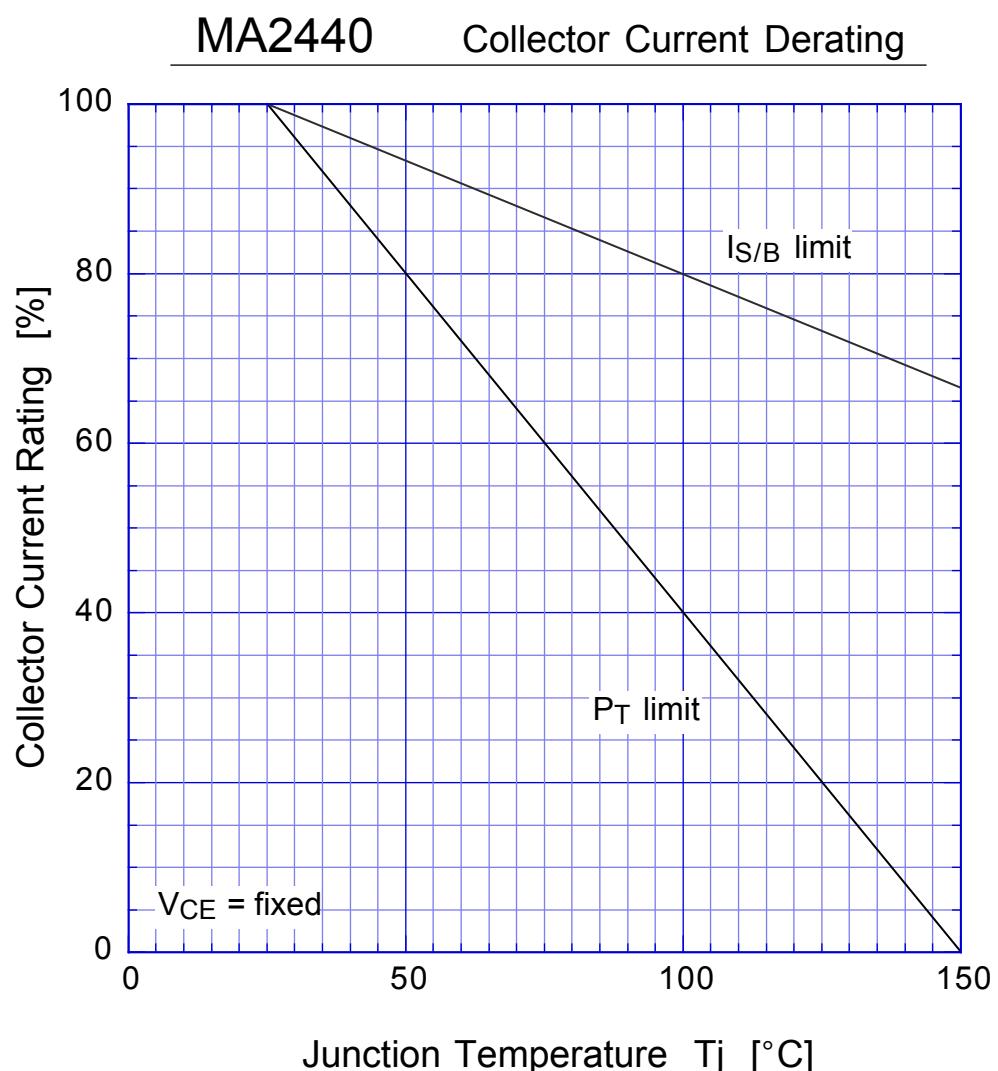

MA2440

Reverse Bias SOA

