



# 050-117

Line Replaceable Unit (LRU) Copper to Fiber Media Converter,  
Single or Dual Channel, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet  
(1000BASE-SX, 1000 BASE-LX10 or 100BASE-FX) 28VDC (DO-  
160 Audio Conducted Susceptibility Cat Z),  
Lightning Strike (DO-160 level 3 waveform 3/3)  
M38999 (ARINC801), M38999 (Quadrax), M38999 (Power)

REV	DESCRIPTION	DATE	APPROVED
18	Preliminary	2/6/2015	MF

BF14U2-6875

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



### 10/100/1000BASE-T to 1000BASE-SX or 1000BASE-LX10



The Glenair 050-117 Flange Mount Copper to Fiber Media Converter can be configured as either Single Channel or Dual Channel and can convert 10/100/1000BASE-T to 1000BASE-SX, 1000BASE-LX or 100BASE-FX protocols. It is designed for harsh environments and incorporates electronics in an environmentally sealed enclosure that incorporates three environmental M38999 connectors. The power supply is designed to accept a wide DC input voltage range, 18V to 36V and dirty 28V power as defined in DO-160. Power is supplied through a 38999 with standard #22D contacts. Signal I/O passes through a 38999 with a combination of Quadrax and #22D contacts and Fiber Optics passes through a 38999 using ARINC 801 contacts which can be configured to support either single mode or multi-mode fiber applications.

#### KEY FEATURES/BENEFITS

- 1310nm FP Lasers for 1000BASE-LX10
- InGaAs PIN PD for 1000BASE-LX10
- 850nm Lasers for 1000BASE-SX
- GaAs PIN PD for 1000BASE-SX
- 1300nm LED for 100BASE-FX
- PIN PD for 100BASE-FX
- Wide Input Voltage Range: 18-36V
- Electrical Interface compliant with IEEE 802.3 (10/100/1000BASE-T)
- Optical Interface compliant with IEEE 802.3 (1000BASE-LX10/-SX, 100BASE-FX)
- DO-160 – Compliant to Lightning Strike Category A3J3XX & Voltage Spike Category A
- DO-160 – Compliant to Audio Frequency Conducted Susceptibility input, Category Z

- Ethernet MDI/MDIX automatic crossover
- Magnetics on the electrical signal input side to support 10/100/1000BASE-T operation over 100m Cat 5E
- IP67 in mated condition
- M38999 Quadrax & pin for Signal, BIT and service port
- M38999 Power
- M38999 ARINC 801 for Fiber Optic
- Flange Mount
- Single or Dual Channel Configurations


#### OPTIONAL FEATURES

- Built In Test Console Port accessible via USB2.0
- Built in Test Console Port accessible via UART-RS422


#### APPLICATIONS

- Harsh Environment Ethernet for Airborne, Tactical and Shipboard applications

#### How To Order

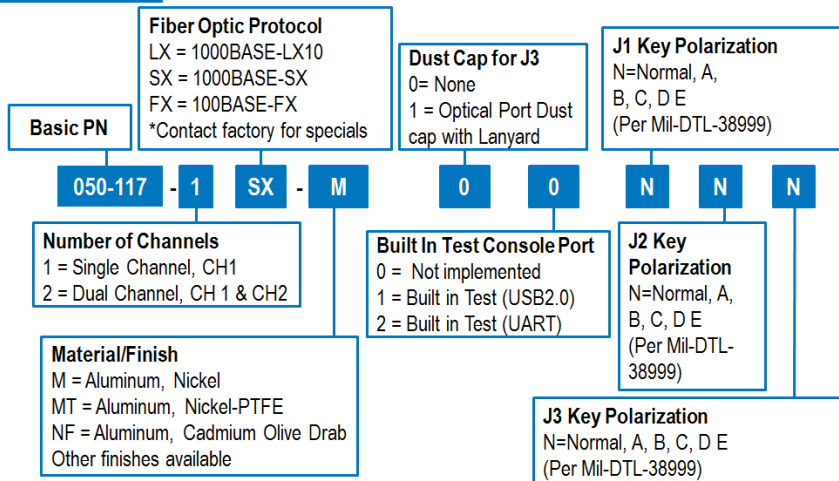

**Functional Block Diagram**



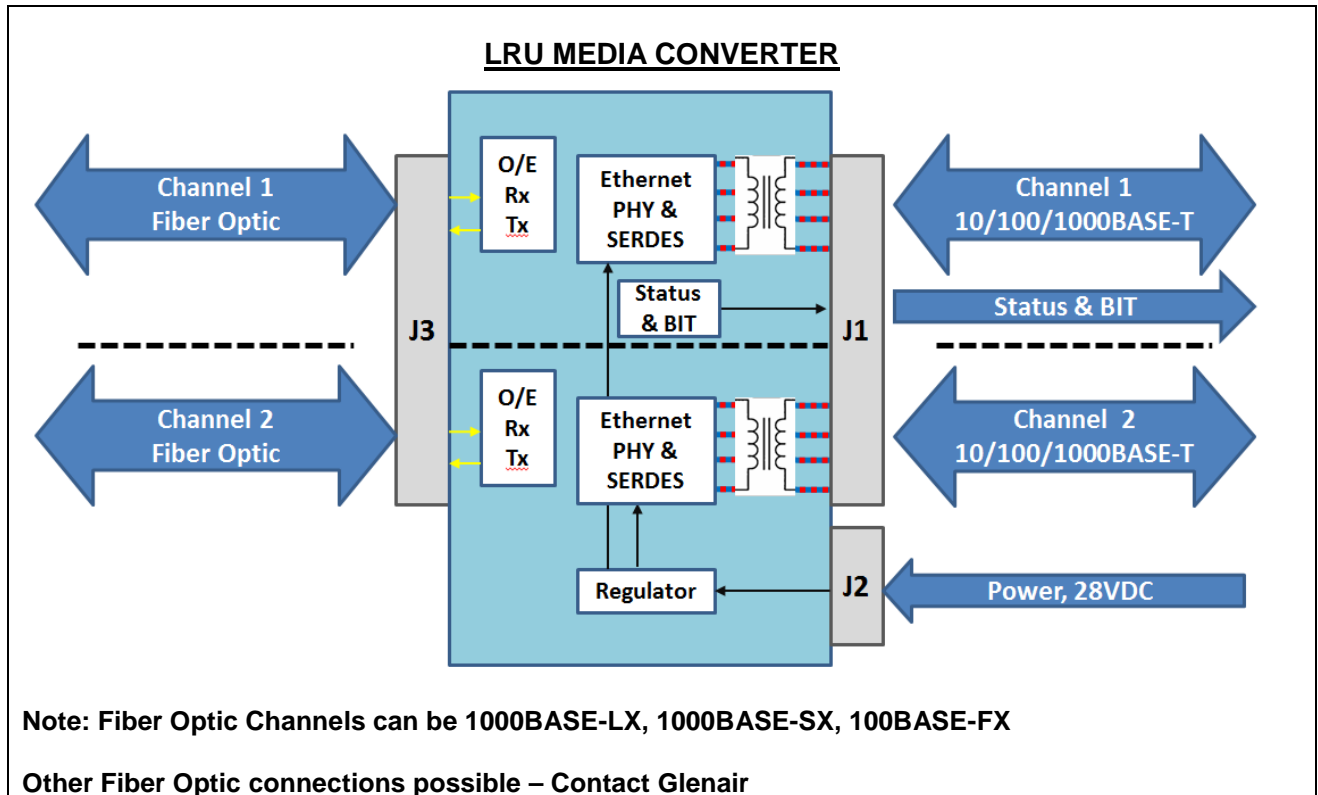


050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)




## Connectors

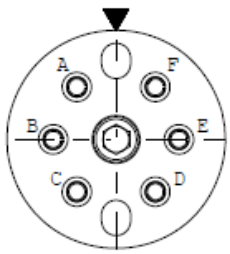NAME	Insert Arrangement	Function	Media Converter	Mating PLUG Connector
J1		Electrical Signal, Status and Built In Test (BIT)	D38999 Series III type, 19Q-18 14X SIZE 22D Pins 4X SIZE 8 QUADRAX Pins (AS39029/119)	Generic PN D38999/26#F18SN type with Quadrax polarization  Glenair PN 257-606-G6##19-18SN
J2		Power	D38999 Series III type, 11-35 13X SIZE 22D Pins	Generic PN D38999/26#B35SN  Glenair PN 233-105-G6##11-35SN
J3	  ARR. 15-6 SHELL SIZE 15	Fiber Optic Signal	D38999 Series III Insert Arrangement per ARINC 801  <u>CONTACTS</u> ARINC 801 LX CONFIGURATION:  SX CONFIGURATION: Contacts: Radial pn F725003419	Glenair PN 180-159##06-15-6N-R (D38999 Style Plug, ARINC 801 15-6 arrangement)  <u>CONTACTS:</u>  LX10 CONFIGURATION Glenair PN 181-076-P-126S 126.0 micron, pull proof design, SMF  SX or FX CONFIGURATION Glenair PN 181-076-P-126 126.0 micron, pull proof design, MMF

Note: # = Environmental Class (Material/Finish)

## Built In Test (BIT) Functionality – USB 2.0

This media converter can be offered with built in test functionality accessible through a Console Port via Universal Serial Bus 2.0 (USB 2.0) or via RS422 UART (TXD) or both options can be made available. Functional block diagram for this is shown below.

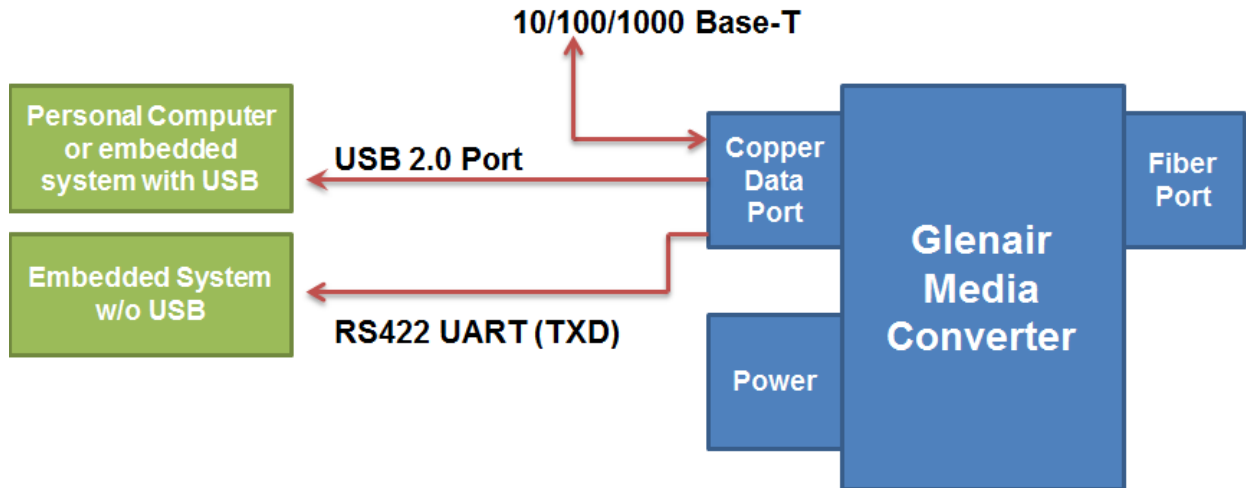

### Universal Serial Bus (2.0) BIT

- Presents itself as a "Virtual" Communications Port
- Compatible with Microsoft Windows, Mac, and Linux OS's.
- On the computer side, open any terminal application (PuTTY, HyperTERM, TeraTERM, etc.) to communicate with the media converter hardware.
- Simple "Human Readable" status messages.

### ALARM STATUS MESSAGES

#### Unit Identification Information

- Unit Serial Number
- Unit Product Code

#### Fiber Side Alarm/Status

- Temperature
- Transmitter TX Fault
- Transmitter Disable Status
- Receiver loss of signal (LOS) or signal Detect (SD) Status

#### Copper Side Status

- Link Status (Up or Down)

050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



TYPICAL CONSOLE PORT WINDOW (PuTTY)

```
COM1 - PuTTY
*****
Glenair *
Media Converter Service Port *
*****
Unit Identification Information
*****
Product Code: 050-117-1SX
Unit Serial Number: 0145
Firmware Revision: 1.2.0
Product Description: 10/100/1000 Mbps Ethernet Copper to Fiber Media Converter

*****
Unit Status
*****
Temperature: 45 degrees C
Power Supply Status: Good
RX Loss of Signal, CH1: False
Transceiver Disable, CH1: False
Transceiver, TX Fault, CH1: False
Copper-Side Link Status, CH1: Up
Fiber-Side Link Status, CH1: Up
```

## Built In Test (BIT) Functionality – UART

This media converter can be offered with built in test functionality accessible via an RS-422 Port. The UART Bit message is a 10 bit message with an update rate of 1 Hz. The message format can be seen below.


### ALARM STATUS MESSAGES

- Fiber Link Status (Up or Down)
- Copper Link Status (Up or Down)
- Power Supply Status (In Range, or Fault)

### Ethernet Media Converter Status Message Format

Standard UART-Type Format (Start and Stop Bits, 8 Data bits, no parity)

Data Rate = 9600 baud, RS422 Output, Message Repetition Rate = 1 Sec

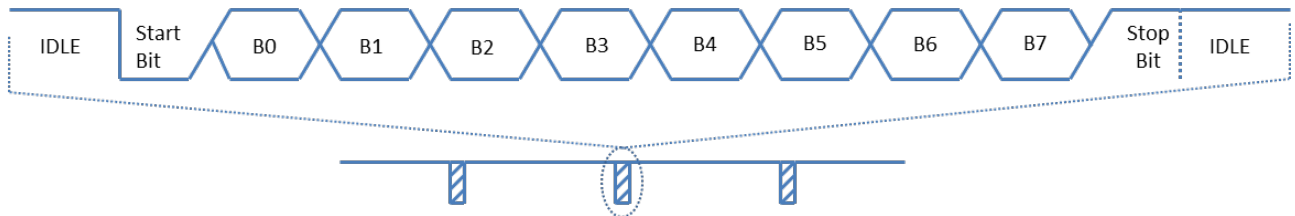

### SERIAL STATUS MESSAGE BIT MAPPING

Bit	Description
0	Channel 1 Fiber Optic TX Fault (1 = Fault, 0 = No Fault)
1	Channel 1 Ethernet copper Link UP (1 = Link Up, 0 = Link Down)
2	Channel 1 Power Supply Voltage "In Range" Fault (1 = Fault, 0 = No Fault)
3	Not used
4	Channel 2 Fiber Optic TX Fault (1 = Fault, 0 = No Fault)
5	Channel 2 Ethernet copper Link UP (1 = Link Up, 0 = Link Down)
6	Channel 2 Power Supply Voltage "In Range" Fault (1 = Fault, 0 = No Fault)
7	Not Used



## Ratings and Specifications – LX10 VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		100	150	mA	@28VDC PER CHANNEL
Power Supply Noise (Peak-Peak)	V <sub>cc_ripple</sub>			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-8.5	-4	-3	dBm	1310nm Fabry-Perot
Optical Wavelength	λ <sub>OUT</sub>	1270	1310	1355	nm	
Spectral Width	Δλ			2.5	nm	

### OPTICAL CHARACTERISTICS – RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity ( Input Power Range)	P <sub>IN OP</sub>	-20		0	dBm	
Min. Sensitivity, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN MIN</sub>		-22	-20	dBm	PIN PD, LX10 source
Overload, BER 10 <sup>-12</sup> , PRBS 2 <sup>-7</sup> -1	P <sub>IN MAX</sub>	0			dBm	
Optical Wavelength	λ <sub>IN</sub>	1100	1310	1590	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-LX10	Single Mode Fiber (9/125μm)	10km	





## Ratings and Specifications – SX VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		100	150	mA	@28VDC PER CHANNEL
Power Supply Noise (Peak-Peak)	V <sub>cc_ripple</sub>			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-9.5		-1	dBm	VCSEL, 62.5/125µm MM
Optical Wavelength	λ <sub>OUT</sub>	830	850	860	nm	
Spectral Width	Δλ			0.85	nm	

### OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity (Input Power Range)	P <sub>IN OP</sub>	-17		-1	dBm	
Min. Sensitivity, BER 10 <sup>-12</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN MIN</sub>		-19	-17	dBm	PIN PD
Overload, BER 10 <sup>-12</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN MAX</sub>	-1	0		dBm	
Optical Wavelength	λ <sub>IN</sub>	770	850	860	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-SX	OM3 MMF (50/125µm) OM1 MMF (62.5/125µm)	550m 275m	850nm VCSEL

050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



## Ratings and Specifications – FX VERSION

### ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T <sub>s</sub>	-55		+100	°C	
Supply Voltage	V <sub>cc</sub>	-0.5		40	V	

### OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T <sub>op</sub>	-40		+85	°C	
Supply Voltage	V <sub>cc</sub>	18	28	36	V	
Supply Current	I <sub>cc</sub>		100	150	mA	@28VDC, PER CHANNEL
Power Supply Noise (Peak-Peak)	V <sub>cc_ripple</sub>			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

### OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P <sub>OUT</sub>	-19		-14	dBm	1300nm LED (IEC 9314-3)
Optical Wavelength	λ <sub>OUT</sub>	1270	1310	1380	nm	
Spectral Width	Δλ		150		nm	

### OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Sensitivity, BER 10 <sup>-10</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN</sub>			-32	dBm	PIN PD
Overload, BER 10 <sup>-10</sup> , PRBS 2 <sup>7</sup> -1	P <sub>IN</sub>	-14			dBm	
Optical Wavelength	λ <sub>IN</sub>	1270	1310	1380	nm	

### ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Fast Ethernet, IEEE 802.3u, 100BASE-T	TIA/EIA-568-B Cat 5E	100m	
Fast Ethernet, IEEE 802.3u, 100BASE-FX, IEC 9314-3	MMF (50/125μm) & (62.5/125μm)	2km	



## Ratings and Specifications - (continued)

### COMPLIANCE SPECIFICATIONS

CHARACTERISTIC	Standard	Condition	Notes
Mechanical Shock	MIL-STD-810	40g	6-9 ms
Mechanical Vibration	MIL-STD-810	30g rms	Per Addendum
Power Input	DO-160G, Section 16	28VDC, Category Z	No damage, Normal Operation (BER free) before and after test
Voltage Spike	DO-160G, Section 17	Category A	No damage, Normal Operation (BER free) before and after test
Power supply, Audio Frequency Conducted Susceptibility	DO-160G, Section 18	Category Z	Normal Operation (BER free) in the presence of "Dirty Power"
Induced Signal Susceptibility	DO-160G, Section 19	Category Z	No damage, Normal Operation (BER free) before and after test
RF Frequency Susceptibility Conducted Susceptibility	DO-160G Section 20.4	Category R	
RF Frequency Susceptibility Radiated Susceptibility	DO-160G Section 20.5	Category R	
Emission of Radio Frequency Energy Conducted Emissions	DO-160G, Section 21.4	Category M	
Emission of Radio Frequency Energy Radiated Emissions	DO-160G, Section 21.3	Category M	
Lightning Strike	DO-160G, Section 22	Category A3J3XX	No damage, Operate error free before and after application of the pin injection tests.  Will operate error free during shielded cable bundle injection tests
ESD	IEC 61000-4-2		Min 8KV (contact) Min 15KV (Air)
Mating Durability	MIL-DTL--38999/20	500 Cycles	
Flame Resistance	EIA364-104		30 seconds
Damp Heat	EIA364-321		240 hours
Eye Safety	CDRH and IEC-825	Class 1 Laser Product	



## Ratings and Specifications - (continued)

### Material/Finish


Item	Material/Finish
Housing & Connector Shell	Aluminum
Plating Finish: M	Nickel
Plating Finish: MT	Nickel PTFE
Plating Finish: NF	Olive Drab Cadmium
Contacts	Copper alloy, 50 µInch gold plated
D38999 Inserts	Thermoplastics
Interfacial Seals, 38999 only	Elastomer, Fluorosilicon
Optical Ferrules & Sleeves	Zirconia, Ceramic
Insulators	Liquid crystal polymer (LCP)
Contact retention clip	Beryllium copper alloy
Seal, O-rings	Fluorosilicone or EPDM
Seal	Fluorosilicone or EPDM
Spring	Nickel-plated beryllium copper
PC tail contacts	Copper alloy/gold plated
PCB flex	FR4 & Polyimide
Solder type: Connector PC Tails to PCBA	Sn63Pb37 or Sn60Pb40
Encapsulant	HYSOL EE4215
Solder type	RoHS compliant Sn95/Sb5 (232°C melting temp) & RoHS compliant Sn96.5/Ag3.0/Cu0.5 (217° melting)

050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



**OUTLINE DRAWING**

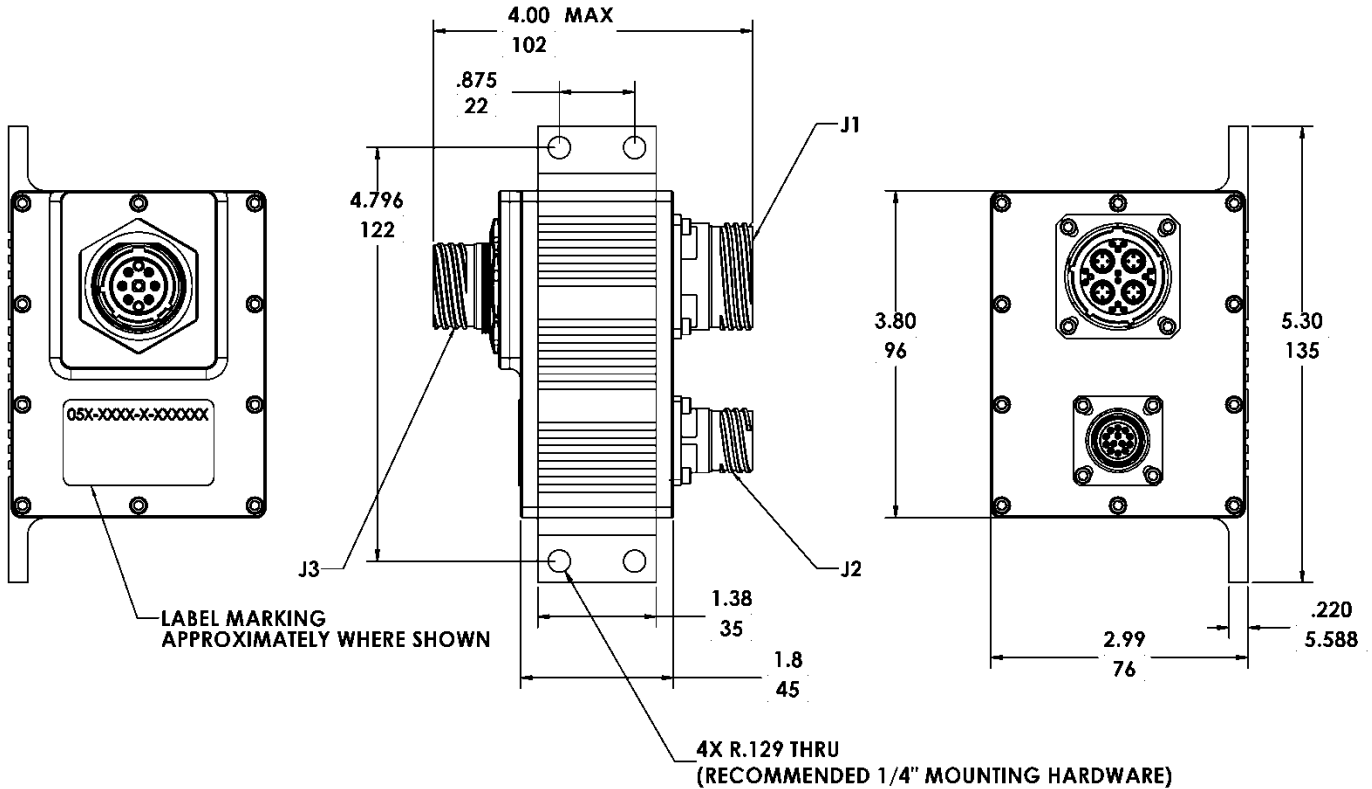

**Dimensional Tolerances Unless specified otherwise:**

- 0.x ± 0.1"
- 0.xx ± 0.03"
- 0.xxx ± 0.015"

**Marking**

Assembly is identified with Manufacture's Name, Cage Code, Part Number, Date Code and Serial Number in approximate location shown

**Weight:**

Description	Weight	Comments
050-117-1 Single Channel Media Converter	1.42 lbs Max.	exclude dust caps
050-117-2 Dual Channel Media Converter	1.45 lbs Max.	

Connectors will be covered with protective caps at time of shipment


Please contact Glenair for other configurations

050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



**Center of Gravity (Preliminary Calculation)**

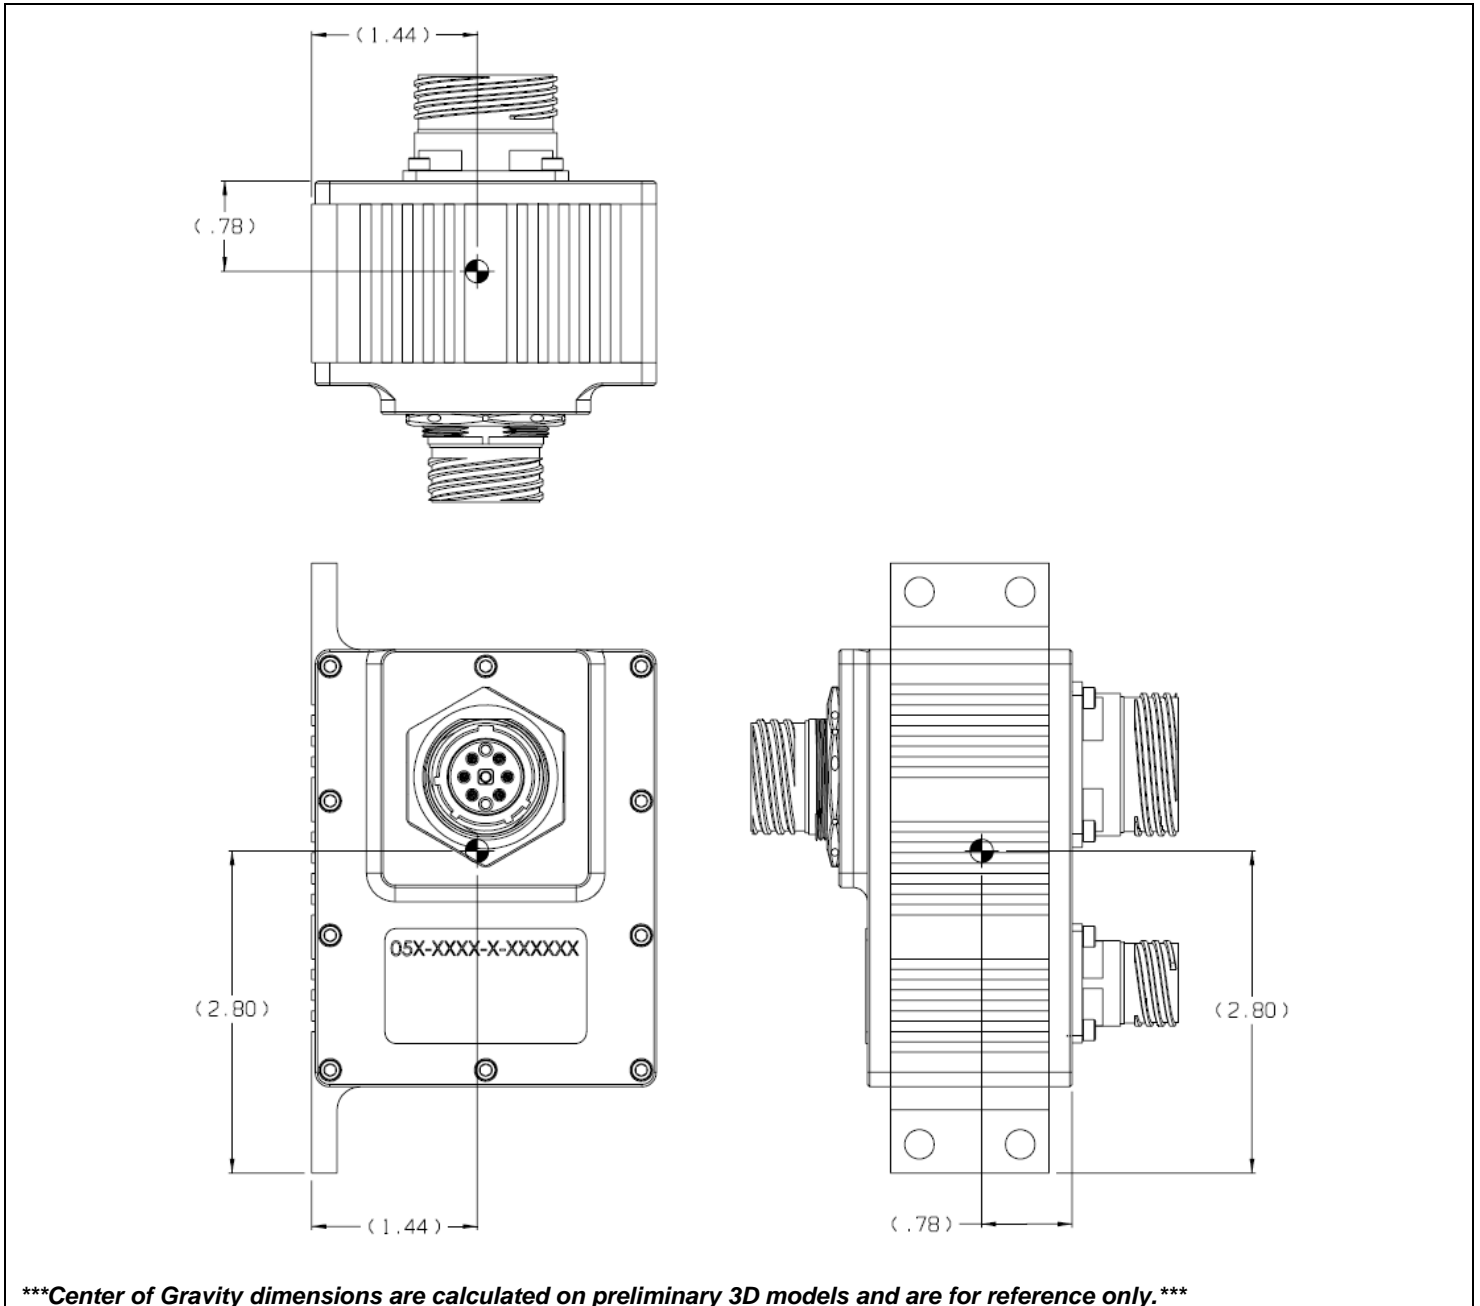


050-117

Line Replaceable Unit (LRU) Media Converter, Flange Mount  
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



## MOUNTING HOLE LOCATIONS

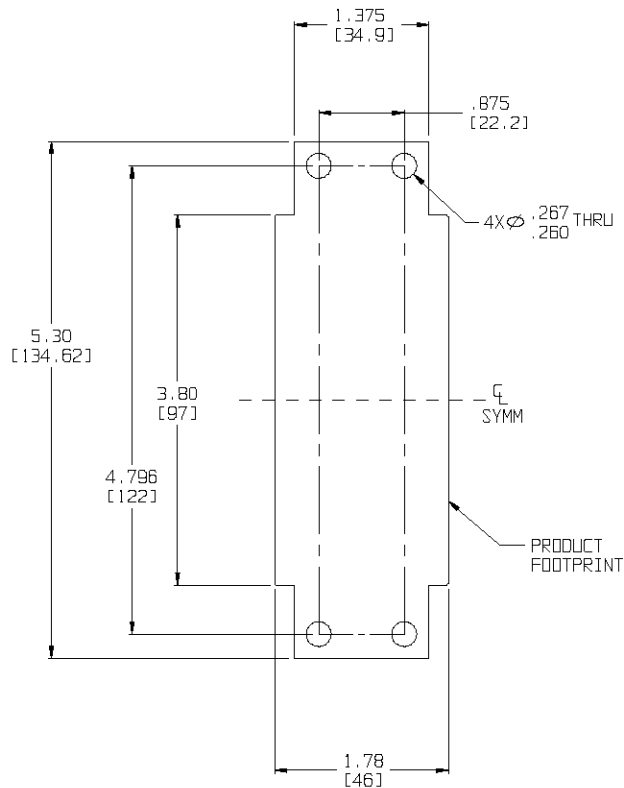

**RECOMMENDED MOUNTING HOLES FOR BASEPLATE**  
**1/4" HARWARE REQUIRED FOR MOUNTING**

**Dimensional Tolerances Unless specified otherwise:**


**0.x ± 0.1"**

**0.xx ± 0.03"**

**0.xxx ± 0.015"**

## Input/Output Definition

### J1 – ELECTRICAL SIGNAL CONNECTOR

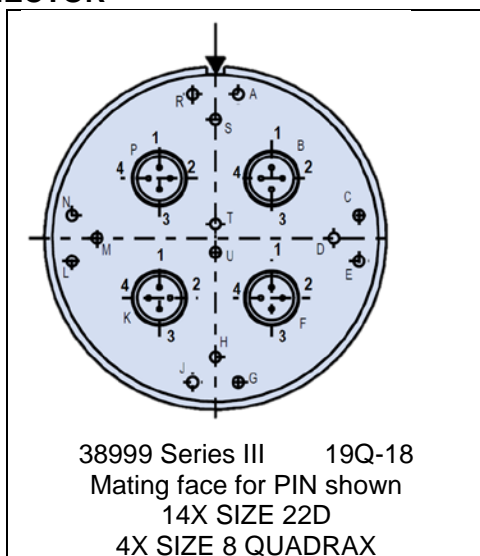

### J1 PIN FUNCTION ASSIGNMENTS

PIN	NAME	DESCRIPTION	NOTES	PIN	NAME	DESCRIPTION	NOTES
A	NC	No connect		K1	Ch2-MDA+	Channel 2, MDA+	1
B1	Ch1-MDA+	Channel 1, MDA+	1	K2	Ch2-MDB+	Channel 2, MDB+	1
B2	Ch1-MDB+	Channel 1, MDB+	1	K3	Ch2-MDA-	Channel 2, MDA-	1
B3	Ch1-MDA-	Channel 1, MDA-	1	K4	Ch2-MDB-	Channel 2, MDB-	1
B4	Ch1-MDB-	Channel 1, MDB-	1	L	UART_BIT_P	BIT UART Positive	3
C	D+	USB D+, BIT	2	M	UART GND	BIT UART Ground	3
D	D-	USB D-, BIT	2	N	UART_BIT_N	BIT UART Negative	3
E	NC	No connect		P1	Ch2-MDC+	Channel 2, MDC+	1
F1	Ch1-MDC+	Channel 1, MDC+	1	P2	Ch2-MDD+	Channel 2, MDD+	1
F2	Ch1-MDD+	Channel 1, MDD+	1	P3	Ch2-MDC-	Channel 2, MDC-	1
F3	Ch1-MDC-	Channel 1, MDC-	1	P4	Ch2-MDD-	Channel 2, MDD-	1
F4	Ch1-MDD-	Channel 1, MDD-	1	R	Ground	DC Return	
G	NC	No connect		S	NC	No connect	
H	NC	No connect		T	USB GND	USB Ground	2
J	NC	No connect		U	USB VBUS	5V, USB supply	2


#### Notes

1. IEEE-802.3 1000BASE-T compliant
- 2 Built In Test Port, USB2.0
- 3 Built In Test Port, RS422 Signal Levels



## Input/Output Definition (continued)


### J2 – POWER CONNECTOR

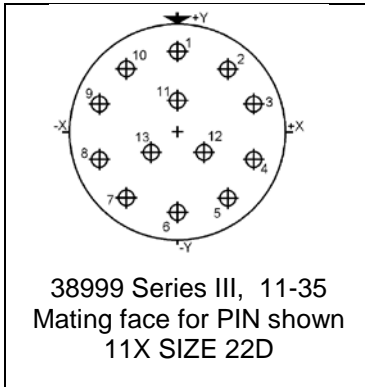

#### J2 PIN FUNCTION ASSIGNMENTS

PIN	NAME	DESCRIPTION	NOTES
1-10	No Connect		
12	No Connect		
11	Vcc	18-36VDC	
13	VDC Return		

### J3 – OPTICAL CONNECTOR

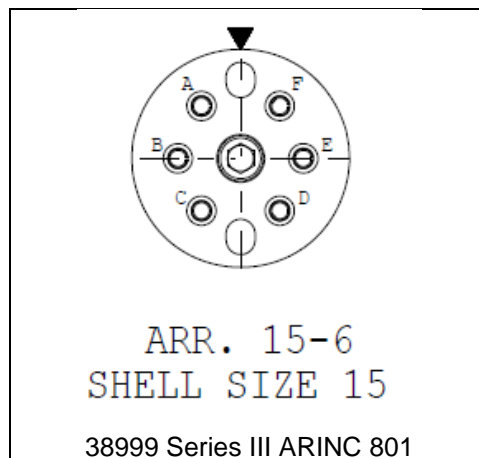

#### J3 PIN FUNCTION ASSIGNMENTS\*

PIN	NAME	DESCRIPTION	NOTES
A	NC	No Connect	
B	TX1	Channel 1 Transmitter	
C	RX2	Channel 2 Receiver	
D	RX1	Channel 1 Receiver	
E	TX2	Channel 2 Transmitter	
F	NC	No Connect	

\*Unused fiber ports will be sealed using a sealing plug MS27488 or equivalent.