

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC  
**TA78M05S, TA78M06S, TA78M08S, TA78M09S, TA78M10S**  
**TA78M12S, TA78M15S, TA78M18S, TA78M20S, TA78M24S**

## 0.5A THREE TERMINAL POSITIVE VOLTAGE REGULATORS



**5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V**

The TA78M $\times \times$ S series of fixed-voltage monolithic integrated circuit voltage regulators is designed for a wide range of applications. These regulators employ internal current-limiting, thermal-shutdown and safe-area compensation, making them essentially indestructible. One of these regulators can driver up to 0.5A of output current.

### FEATURES

- Suitable for CMOS, TTL and the other Digital IC's Power Supply.
- Output Current in Excess of 0.5A
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting
- Package in the Plastic Case TO-220NIS

### EQUIVALENT CIRCUIT

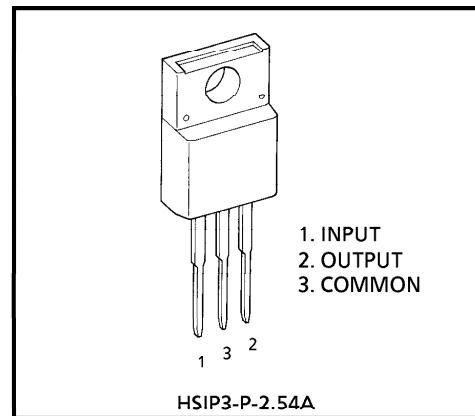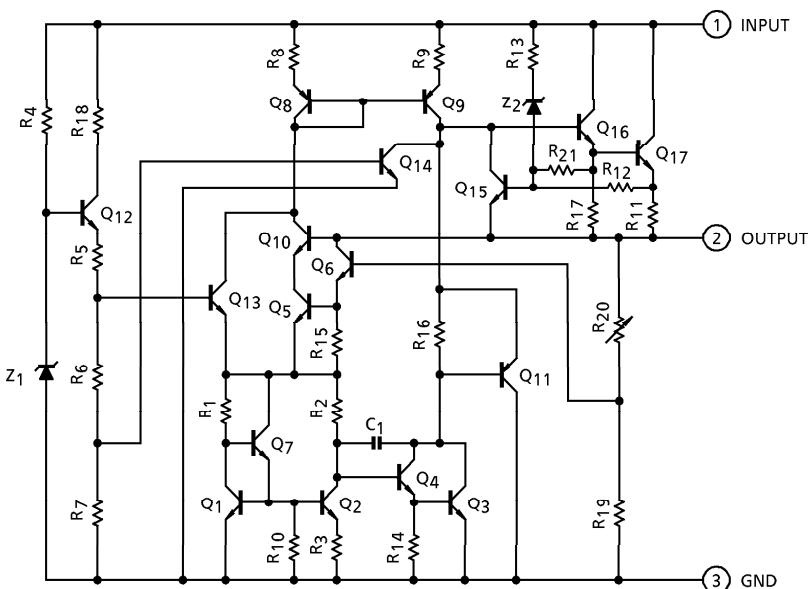

Weight : 1.7g (Typ.)

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	$V_{IN}$	35	V
TA78M05S			
TA78M06S			
TA78M08S			
TA78M09S			
TA78M10S			
TA78M12S			
TA78M15S			
TA78M18S			
Power Dissipation	$P_D$	2	W
( $T_c = 25^\circ\text{C}$ )		20	
Operating Temperature	$T_{opr}$	-30~75	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55~150	$^\circ\text{C}$
Operating Junction Temperature	$T_j$	-30~150	$^\circ\text{C}$
Thermal Resistance	$R_{th} (j-c)$	6.25	$^\circ\text{C} / \text{W}$
	$R_{th} (j-a)$	62.5	

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TA78M05S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 10V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		4.8	5.0	5.2	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	7V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	4	100	mV	
				8V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	2	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	25	100	
					5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	50	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	7V ≤ V <sub>IN</sub> ≤ 20V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	4.75	—	5.25	V	
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.5	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	8.5V ≤ V <sub>IN</sub> ≤ 25.5V, I <sub>OUT</sub> = 200mA		—	—	0.8	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA		—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	50	200	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 8V ≤ V <sub>IN</sub> ≤ 18V, T <sub>j</sub> = 25°C		62	69	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-0.6	—	mV / °C	

TA78M06S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 11V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		5.75	6.0	6.25	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	8V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	4	100	mV	
				9V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	2	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	25	120	
					5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	60	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	8V ≤ V <sub>IN</sub> ≤ 21V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	5.7	—	6.3	V	
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.5	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	9.5V ≤ V <sub>IN</sub> ≤ 25.5V, I <sub>OUT</sub> = 200mA		—	—	0.8	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA		—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	55	220	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 9V ≤ V <sub>IN</sub> ≤ 19V, T <sub>j</sub> = 25°C		59	66	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-0.7	—	mV / °C	

TA78M08S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 14V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		7.7	8.0	8.3	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	10.5V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	5	100	mV	
				11V ≤ V <sub>IN</sub> ≤ 25V I <sub>OUT</sub> = 200mA	—	3	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	26	160	
					5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	80	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	10.5V ≤ V <sub>IN</sub> ≤ 23V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	7.6	—	8.4	V	
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.6	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BL</sub>	1	11V ≤ V <sub>IN</sub> ≤ 25.5V, I <sub>OUT</sub> = 200mA	—	—	0.8	mA	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA	—	—	0.5		
Output Noise Voltage	V <sub>NO</sub>	2	T <sub>a</sub> = 25°C, 10Hz ≤ f ≤ 100kHz		—	60	250	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 11.5V ≤ V <sub>IN</sub> ≤ 21.5V, T <sub>j</sub> = 25°C		56	63	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	T <sub>a</sub> = 25°C		—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-1.0	—	mV / °C	

TA78M09S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 15V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		8.64	9.0	9.36	V
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	11.5V ≤ V <sub>IN</sub> ≤ 26V I <sub>OUT</sub> = 200mA	—	5	100	mV
				13V ≤ V <sub>IN</sub> ≤ 26V I <sub>OUT</sub> = 200mA	—	3	50	
Load Regulation	Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	26	180	mV
				5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	90	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	11.5V ≤ V <sub>IN</sub> ≤ 24V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	8.55	—	9.45	V
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C	—	4.6	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	12V ≤ V <sub>IN</sub> ≤ 26.5V, I <sub>OUT</sub> = 200mA	—	—	0.8	mA
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA	—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	T <sub>a</sub> = 25°C, 10Hz ≤ f ≤ 100kHz	—	60	270	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 12.5V ≤ V <sub>IN</sub> ≤ 22.5V, T <sub>j</sub> = 25°C	56	63	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C	—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	T <sub>a</sub> = 25°C	—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA	—	-1.1	—	mV / °C	

TA78M10S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 16V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		9.6	10.0	10.4	V
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	12.5V ≤ V <sub>IN</sub> ≤ 26V I <sub>OUT</sub> = 200mA	—	6	100	mV
				14V ≤ V <sub>IN</sub> ≤ 26V I <sub>OUT</sub> = 200mA	—	3	50	
Load Regulation	Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	26	200	mV
				5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	100	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	12.5V ≤ V <sub>IN</sub> ≤ 25V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	9.5	—	10.5	V
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C	—	4.7	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BL</sub>	1	13V ≤ V <sub>IN</sub> ≤ 26.5V, I <sub>OUT</sub> = 200mA	—	—	0.8	mA
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA	—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	T <sub>a</sub> = 25°C, 10Hz ≤ f ≤ 100kHz	—	65	280	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 13.5V ≤ V <sub>IN</sub> ≤ 23.5V, T <sub>j</sub> = 25°C	55	62	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C	—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	T <sub>a</sub> = 25°C	—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA	—	-1.3	—	mV / °C	

TA78M12S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 19V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		11.5	12.0	12.5	V
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	14.5V ≤ V <sub>IN</sub> ≤ 30V I <sub>OUT</sub> = 200mA	—	7	100	mV
				16V ≤ V <sub>IN</sub> ≤ 30V I <sub>OUT</sub> = 200mA	—	3	50	
Load Regulation	Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	27	240	mV
				5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	120	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	14.5V ≤ V <sub>IN</sub> ≤ 27V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	11.4	—	12.6	V
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C	—	4.8	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	15V ≤ V <sub>IN</sub> ≤ 30.5V, I <sub>OUT</sub> = 200mA	—	—	0.8	mA
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA	—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	T <sub>a</sub> = 25°C, 10Hz ≤ f ≤ 100kHz	—	70	300	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 15V ≤ V <sub>IN</sub> ≤ 25V, T <sub>j</sub> = 25°C	55	62	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C	—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	T <sub>a</sub> = 25°C	—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA	—	-1.6	—	mV / °C	

TA78M15S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 23V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		14.4	15.0	15.6	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	17.5V ≤ V <sub>IN</sub> ≤ 30V I <sub>OUT</sub> = 200mA	—	8	100	mV	
				20V ≤ V <sub>IN</sub> ≤ 30V I <sub>OUT</sub> = 200mA	—	4	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA	—	27	300	
					5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	10	150	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	17.5V ≤ V <sub>IN</sub> ≤ 30V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	14.25	—	15.75	V	
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.8	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	18V ≤ V <sub>IN</sub> ≤ 30.5V, I <sub>OUT</sub> = 200mA	—	—	0.8	mA	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA	—	—	0.5		
Output Noise Voltage	V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	80	450	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 18.5V ≤ V <sub>IN</sub> ≤ 28.5V, T <sub>j</sub> = 25°C		54	61	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-2.0	—	mV / °C	

TA78M18S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 27V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		17.3	18.0	18.7	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	21V ≤ V <sub>IN</sub> ≤ 33V I <sub>OUT</sub> = 200mA	—	9	100	mV	
				24V ≤ V <sub>IN</sub> ≤ 33V I <sub>OUT</sub> = 200mA	—	5	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA 5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	28	360	
Output Voltage		V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	21V ≤ V <sub>IN</sub> ≤ 33V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	17.1	—	18.9	
Quiescent Current		I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.8	8.0	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	21.5V ≤ V <sub>IN</sub> ≤ 33.5V, I <sub>OUT</sub> = 200mA		—	—	0.8	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA		—	—	0.5	
Output Noise Voltage		V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	90	490	
Ripple Rejection		R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 22V ≤ V <sub>IN</sub> ≤ 32V, T <sub>j</sub> = 25°C		53	60	—	
Short Circuit Current Limit		I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	
Dropout Voltage		V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	
Average Temperature Coefficient Of Output Voltage		T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-2.5	—	
								mV / °C	

TA78M20S

**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 29V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)



CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		19.2	20.0	20.8	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	23V ≤ V <sub>IN</sub> ≤ 35V I <sub>OUT</sub> = 200mA	—	10	100	mV	
				24V ≤ V <sub>IN</sub> ≤ 35V I <sub>OUT</sub> = 200mA	—	6	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA 5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	28	400	
Output Voltage		V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	23V ≤ V <sub>IN</sub> ≤ 35V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	19.0	—	21.0	
Quiescent Current	I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	4.9	8.0	mA	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	23.5V ≤ V <sub>IN</sub> ≤ 35.5V, I <sub>OUT</sub> = 200mA		—	—	0.8	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA		—	—	0.5	
Output Noise Voltage	V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	95	540	μV <sub>rms</sub>	
Ripple Rejection	R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 24V ≤ V <sub>IN</sub> ≤ 34V, T <sub>j</sub> = 25°C		53	60	—	dB	
Short Circuit Current Limit	I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	mA	
Dropout Voltage	V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	V	
Average Temperature Coefficient Of Output Voltage	T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-3.0	—	mV / °C	

TA78M24S


**ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub> = 33V, I<sub>OUT</sub> = 350mA, 0°C ≤ T<sub>j</sub> ≤ 125°C, C<sub>IN</sub> = 0.33μF, C<sub>OUT</sub> = 0.1μF, unless otherwise noted)







CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT	
Output Voltage	V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C		23.0	24.0	25.0	V	
Line Regulation	Reg.line	1	T <sub>j</sub> = 25°C	27V ≤ V <sub>IN</sub> ≤ 38V I <sub>OUT</sub> = 200mA	—	12	100	mV	
				28V ≤ V <sub>IN</sub> ≤ 38V I <sub>OUT</sub> = 200mA	—	7	50		
Load Regulation		Reg.load	1	T <sub>j</sub> = 25°C	5mA ≤ I <sub>OUT</sub> ≤ 500mA 5mA ≤ I <sub>OUT</sub> ≤ 200mA	—	30	480	
Output Voltage		V <sub>OUT</sub>	1	T <sub>j</sub> = 25°C	27V ≤ V <sub>IN</sub> ≤ 38V 5mA ≤ I <sub>OUT</sub> ≤ 350mA	22.8	—	25.2	
Quiescent Current		I <sub>B</sub>	1	T <sub>j</sub> = 25°C		—	5.0	8.0	
Quiescent Current Change	Line	ΔI <sub>BI</sub>	1	27.5V ≤ V <sub>IN</sub> ≤ 38.5V, I <sub>OUT</sub> = 200mA		—	—	0.8	
	Load	ΔI <sub>BO</sub>	1	5mA ≤ I <sub>OUT</sub> ≤ 350mA		—	—	0.5	
Output Noise Voltage		V <sub>NO</sub>	2	Ta = 25°C, 10Hz ≤ f ≤ 100kHz		—	115	650	
Ripple Rejection		R.R.	3	f = 120Hz, I <sub>OUT</sub> = 100mA 28V ≤ V <sub>IN</sub> ≤ 38V, T <sub>j</sub> = 25°C		50	57	dB	
Short Circuit Current Limit		I <sub>SC</sub>	1	T <sub>j</sub> = 25°C		—	960	—	
Dropout Voltage		V <sub>D</sub>	1	Ta = 25°C		—	1.7	—	
Average Temperature Coefficient Of Output Voltage		T <sub>CVO</sub>	1	I <sub>OUT</sub> = 5mA		—	-3.5	mV / °C	


## TEST CIRCUIT 1 / STANDARD APPLICATION

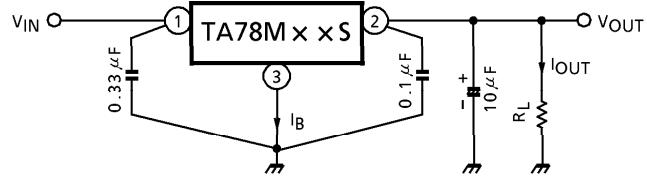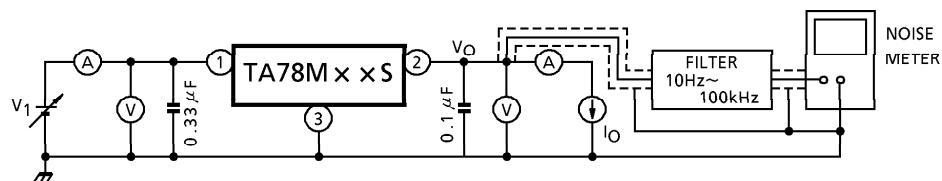TEST CIRCUIT 2 V<sub>NO</sub>

## TEST CIRCUIT 3 R.R.

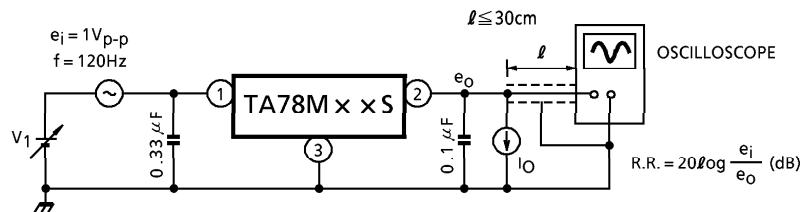


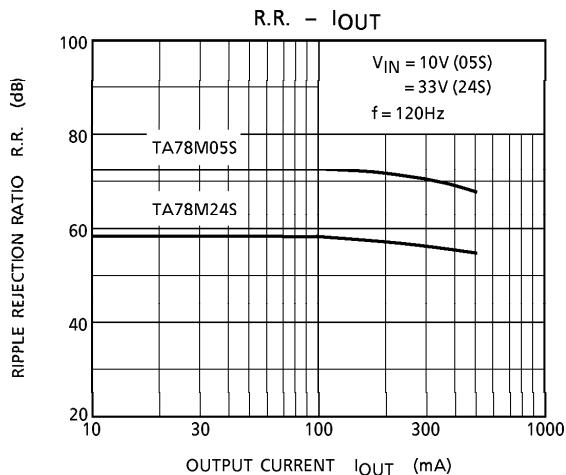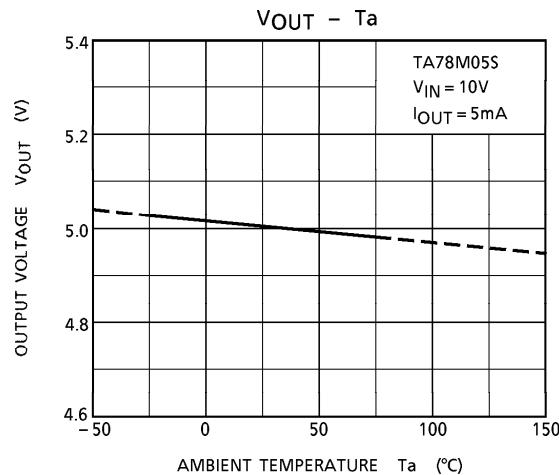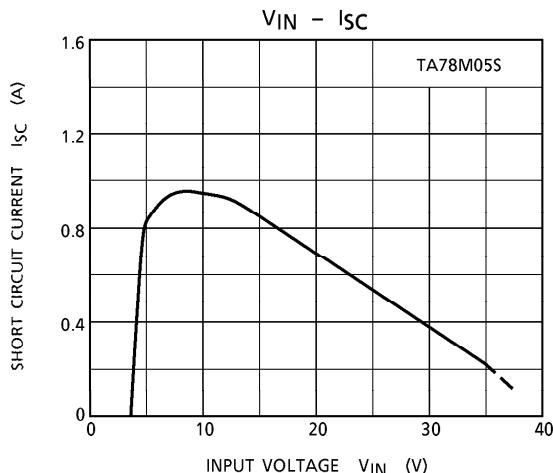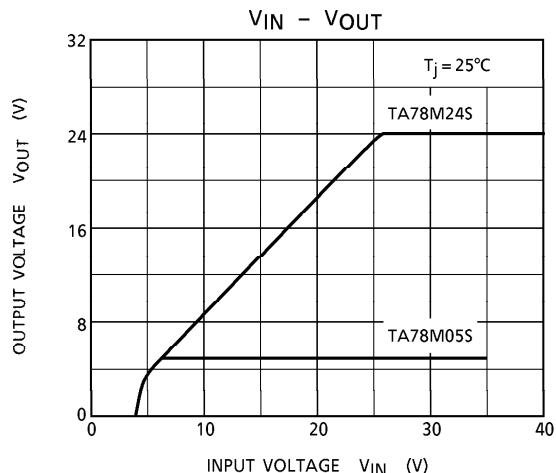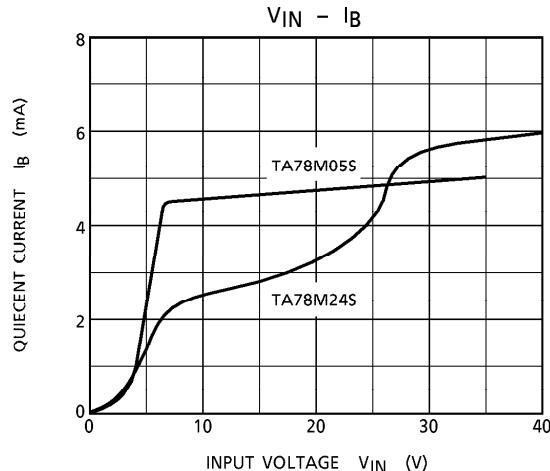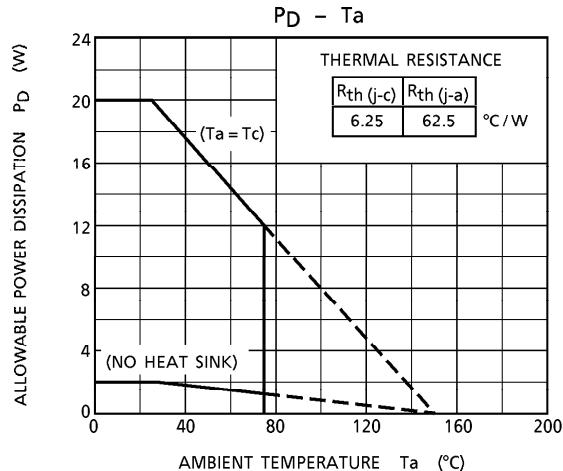

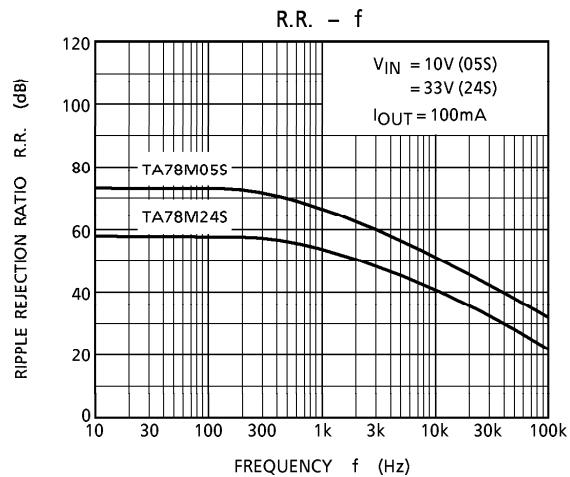


### PRECAUTIONS ON APPLICATION

- (1) In regard to GND, be careful not to apply a negative voltage to the input/output terminal. Further, special care is necessary in case of a voltage boost application.
- (2) When a surge voltage exceeding maximum rating is applied to the input terminal or when a voltage in excess of the input terminal voltage is applied to the output terminal, the circuit may be destroyed. Specially, in the latter case, great care is necessary. Further, if the input terminal sorts to GND in a state of normal operation, the output terminal voltage becomes higher than the input voltage (GND potential), and the electric charge of a chemical capacitor connected to the output terminal flows into the input side, which may cause the destruction of circuit. In these cases, take such steps as a zener diode and a general silicon diode are connected to the circuit, as shown in the following figure.

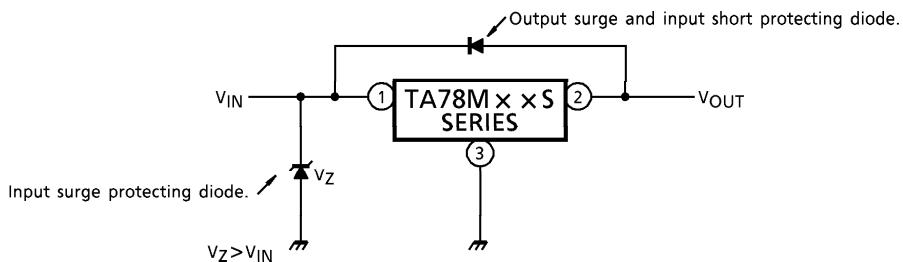

- (3) When the input voltage is too high, the power dissipation of three terminal regulator increases because of series regulator, so that the junction temperature rises. In such a case, it is recommended to reduce the power dissipation by inserting the power limiting resistor  $R_{SD}$  in the input terminal, and to reduce the junction temperature as a result.

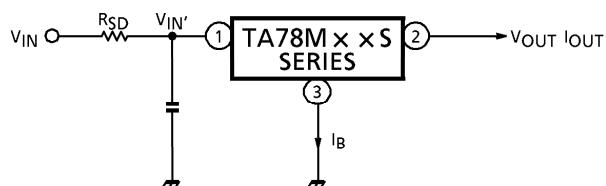

The power dissipation  $P_D$  of IC is expressed in the following equation.

$$P_D = (V_{IN'} - V_{OUT}) \cdot I_{OUT} + V_{IN'} \cdot I_B$$

If  $V_{IN'}$  is reduced below the lowest voltage necessary for the IC, the parasitic oscillation will be caused according to circumstances.

In determining the resistance value of  $R_{SD}$ , design with margin should be made by making reference to the following equation.

$$R_{SD} < \frac{V_{IN} - V_{IN'}}{I_{OUT} + I_B}$$

- (4) Connect the input terminal and GND, and the output terminal and GND, by capacitor respectively. The capacitances should be determined experimentally because they depend on printed patterns. In particular, adequate investigation should be made so that there is no problem even at time of high or low temperature.
- (5) Installation of IC for power supply  
For obtaining high reliability on the heat sink design of the regulator IC, it is generally required to derate more than 20% of maximum junction temperature ( $T_j$  MAX.).  
Further, full consideration should be given to the installation of IC to the heat sink.
- (a) Heat sink design  
The thermal resistance of IC itself is required from the viewpoint of the design of elements, but the thermal resistance from the IC package to the open air varies with the contact thermal resistance.  
Table 1 shows how much the value of the contact thermal resistance ( $\theta_c + \theta_s$ ) is changed by heat sink grease.

TABLE 1

Unit : °C / W

PACKAGE	MODEL No.	TORQUE	MICA	$\theta_c + \theta_s$
TO-220NIS	TA78M × × S	0.6N·m	Not Provided	0.3~0.5 (1.5~2.0)

The figures given in parentheses denote the values at time of no grease.

(b) Silicon grease

When a circuit not exceeding maximum rating is designed, it is to be desired that the grease should be used if possible. If it is required that the contact thermal resistance is reduced from the viewpoint of the circuit design, it is recommended that the following methods be adopted.

A : Use YG6260 (TOSHIBA SILICON CORPORATION), if grease is used.


(c) Torque

When installing IC on a heat sink or the like, tighten the IC with the torque of less than the rated value. If it is tightened with the torque in excess of the rated value, sometimes the internal elements of the IC are adversely affected. Therefore, great care should be given to the installing operation.


## APPLICATION CIRCUITS

## (1) VOLTAGE BOOST REGULATOR


## (a) Voltage boost by use of zener diode

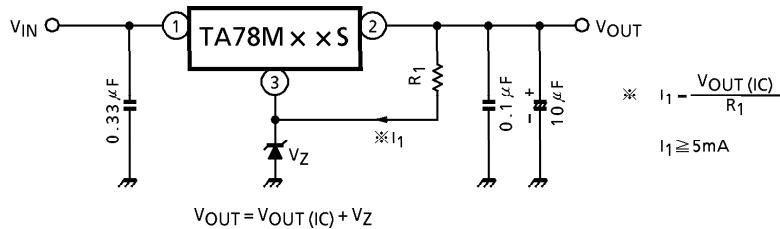

## (b) Voltage boost by use of resistor

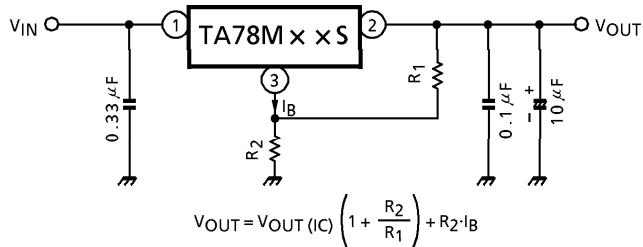


## (c) Adjustable output regulator

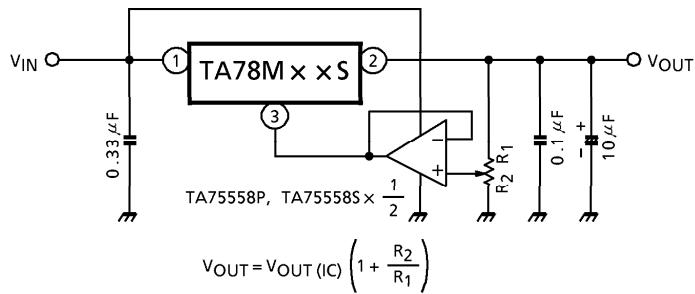


## (2) CURRENT BOOST REGULATOR


## (a) CURRENT BOOST VOLTAGE REGULATOR

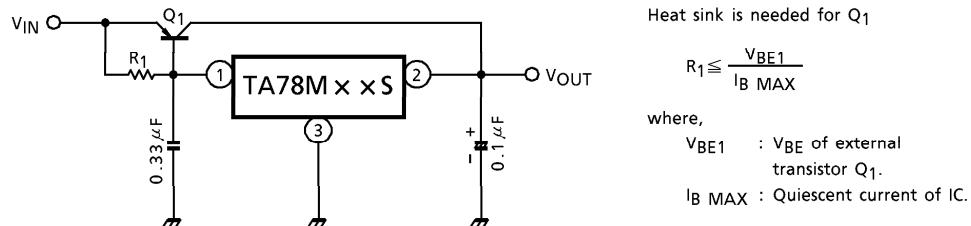


## (b) SHORT-CIRCUIT PROTECTION

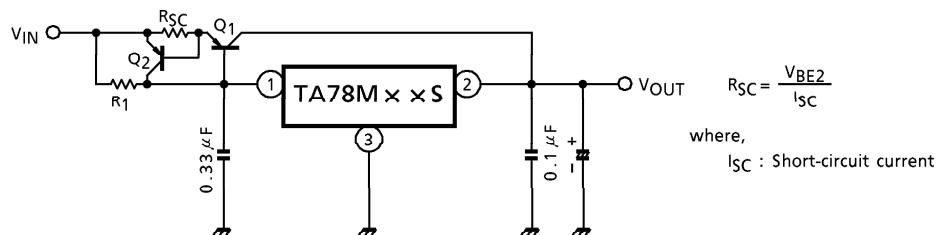


## (3) NEGATIVE REGULATOR

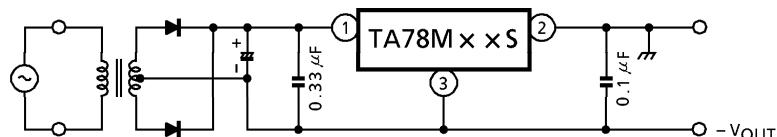

## (4) POSITIVE AND NEGATIVE REGULATOR

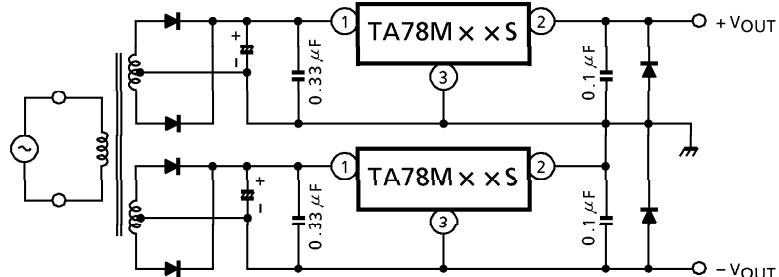


## (5) CURRENT REGULATOR

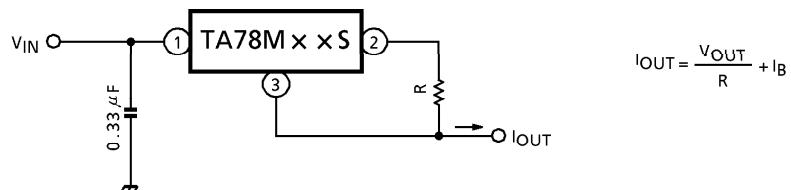

## OUTLINE DRAWING

HSIP3-P-2.54A

Unit : mm

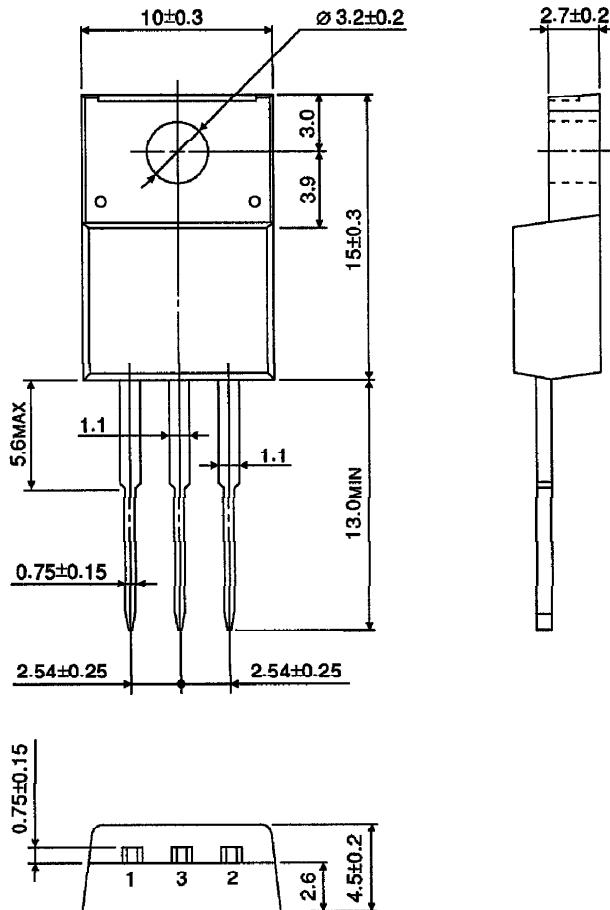

Weight : 1.7g (Typ.)