

HD46508, HD46508-1, HD46508A, HD46508A-1 ADU (Analog Data Acquisition Unit)

The HD46508 is a monolithic NMOS device with a 10-bit analog-to-digital converter, a programmable voltage comparator, a 16-channel analog multiplexer and HMCS6800 microprocessor family compatible interface.

Each of 16 analog inputs is either converted to a digital data by the analog-to-digital converter or compared with the specified value by the programmable comparator. The analog-to-digital converter uses successive approximation method as the conversion technique. Its intrinsic resolution is 10 bits but it can be 8 bits if the programmer so desires. The programmable voltage comparator compares the input voltage with the value specified by the programmer. The result (greater than, or smaller than) is reflected to the flag in the status register.



The device can expand its capability by controlling the external circuits such as sample holder, pre-amplifier and external multiplexer.

With these features, this device is ideally suited to applications such as process control, machine control and vehicle control.


FEATURES

- 16-channel Analog multiplexer
- Programmable A/D Converter resolution (10-bit or 8-bit)
- Programmable Voltage comparison (PC)
- Conversion Time 100 μ s (A/D), 13 μ s(PC)
- External Sample and Hold Circuit Control
- Auto Range-switching Control of External Amplifier
- Waiting Function for the Settling Time of External Amplifier
- Interrupt Control (Only for A/D conversion)
- Single +5V Power Supply
- Compatible with HMCS6800 Bus (The connection with other Asynchronous Buses possible)

BLOCK DIAGRAM

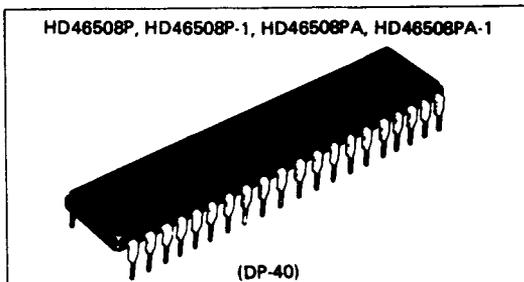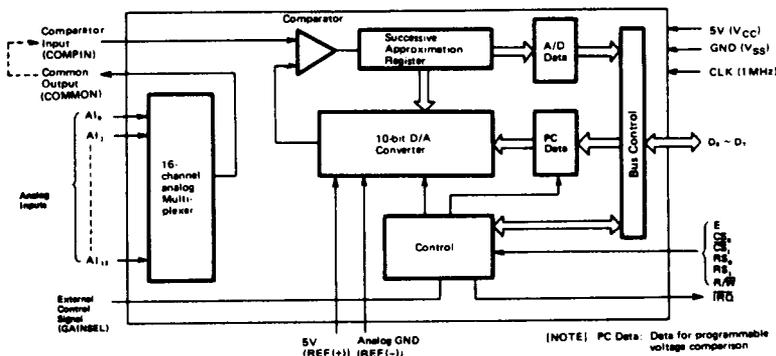

PIN ARRANGEMENT

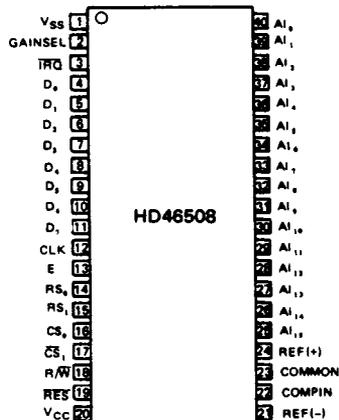

(Top View)

ORDERING INFORMATION

| ADU | Bus Timing | Non Linearity* |
|------------|------------|----------------|
| HD46508A | 1 MHz | ± 1 LSB |
| HD46508A-1 | 1.5 MHz | |
| HD46508A-2 | 2 MHz | |
| HD46508 | 1 MHz | ± 3 LSB |
| HD46508-1 | 1.5 MHz | |
| HD46508-2 | 2 MHz | |

HD46508, HD46508-1, HD46508A, HD46508A-1

■ ABSOLUTE MAXIMUM RATINGS

| Item | Symbol | Value | Unit |
|-----------------------|-------------|-------------|------|
| Supply Voltage | V_{CC}^* | -0.3 ~ +7.0 | V |
| Input Voltage | V_{in}^* | -0.3 ~ +7.0 | V |
| Analog Input Voltage | V_{Ain}^* | -0.3 ~ +7.0 | V |
| Operating Temperature | T_{opr} | -20 ~ +75 | °C |
| Storage Temperature | T_{stg} | -55 ~ +150 | °C |

* With respect to V_{SS} (SYSTEM GND)

[NOTE] Permanent LSI damage may occur if maximum ratings are exceeded. Normal operation should be under recommended operating conditions. If these conditions are exceeded, it could affect reliability of LSI.

■ RECOMMENDED OPERATING CONDITIONS

| Item | Symbol | min | typ | max | Unit |
|--------------------------|-------------------------------------|------|--------------------|-------------------------|------|
| Supply Voltage | V_{CC}^* | 4.75 | 5.0 | 5.25 | V |
| Input "High" Voltage | V_{IH}^* | 2.0 | - | V_{CC} | V |
| Input "Low" Voltage | V_{IL}^* | -0.3 | - | 0.8 | V |
| Analog Input Voltage | V_{Ain}^* | 0 | - | $V_{REF(+)}$ | V |
| Reference Voltage | $V_{REF(+)}^*$ | - | V_{CC} | $V_{CC}+0.25$ | V |
| | $V_{REF(-)}^*$ | -0.1 | 0 | - | |
| Voltage Center of Ladder | $\frac{V_{REF(+)} + V_{REF(-)}}{2}$ | - | $\frac{V_{CC}}{2}$ | $\frac{V_{CC}+0.25}{2}$ | V |
| Operating Temperature | T_{opr} | -20 | 25 | 75 | °C |

*With respect to V_{SS} (SYSTEM GND)

■ ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS <1> ($V_{CC} = 5V \pm 5\%$, $V_{SS} = 0V$, $T_a = -20 \sim +75^\circ C$, unless otherwise noted.)

| Item | Symbol | Test Condition | min | typ | max | Unit | |
|--|--|---|---|--------------|----------|------|----|
| Input "High" Voltage | V_{IH} | | 2.0 | - | V_{CC} | V | |
| Input "Low" Voltage | V_{IL} | | -0.3 | - | 0.8 | V | |
| Output "High" Voltage | $D_0 \sim D_7$ GAINSEL | V_{OH} | $I_{OH} = -205\mu A$ | 2.4 | - | - | V |
| | | | $I_{OH} = -200\mu A$ | 2.4 | - | - | |
| | | | $I_{OH} = -10\mu A$ | $V_{CC}-1.0$ | - | - | |
| Output "Low" Voltage | $D_0 \sim D_7$, GAINSEL IRQ | V_{OL} | $I_{OL} = 1.6 mA$ | - | - | 0.4 | V |
| | | | $I_{OL} = 3.2 mA$ | - | - | 0.4 | |
| Input Leakage Current | I_{in} | $V_{in} = 0 \sim 5.25V$ E, CLK, R/W RES, RS ₀ , RS ₁ CS ₀ , CS ₁ | -2.5 | - | 2.5 | μA | |
| Three-State (off state) Input Current | I_{TSI} | $V_{in} = 0.4 \sim 2.4V$ $D_0 \sim D_7$ | -10 | - | 10 | μA | |
| Output Leakage Current | I_{LOH} | $V_{OH} = 2.4V$ IRQ | - | - | 10 | μA | |
| Power Dissipation | P_D | | - | - | 500 | mW | |
| Input Capacitance | $D_0 \sim D_7$ E, CLK, R/W RES, RS ₀ , RS ₁ CS ₀ , CS ₁ | C_{in} | $V_{in} = 0V$, $T_a = 25^\circ C$ $f = 1 MHz$ | - | - | 12.5 | pF |
| | | | | - | - | 10.0 | |
| Output Capacitance | IRQ, GAINSEL | C_{out} | $V_{in} = 0V$, $T_a = 25^\circ C$ $f = 1 MHz$ | - | - | 10.0 | pF |

4



HD46508, HD46508-1, HD46508A, HD46508A-1

● DC CHARACTERISTICS <2> ($V_{CC} = 5V \pm 5\%$, $V_{SS} = 0V$, $T_a = -20 \sim +75^\circ C$, unless otherwise noted.)

| Item | Test Condition | min | typ | max | Unit |
|--|--|------|-----|-----|------------|
| Analog Multiplexer ON Resistance | $V_{Ain} = 5.0V$, $V_{CC} = 4.75V$, $T_a = 25^\circ C$ | — | — | 1 | k Ω |
| OFF Channel Leakage Current | $V_{Ain} = 5.0V$ $V_{CC} = 4.75V$, $T_a = 25^\circ C$ COMMON = 0V | — | 10 | 100 | nA |
| | $V_{Ain} = 0V$, $T_a = 25^\circ C$ $V_{CC} = 4.75V$, COMMON = 5V | -100 | -10 | — | nA |
| Analog Multiplexer Input Capacitance | | — | — | 7.5 | pF |
| Ladder Resistance (from REF(+) to REF(-)) | $V_{REF(+)} = 5.0V$ $V_{REF(-)} = 0V$, $T_a = 25^\circ C$ | 10 | — | 40 | k Ω |

● CONVERTER SECTION ($T_a = 25^\circ C$, $V_{CC} = V_{REF(+)} = 5.0V$, $t_{CYC} = 1\mu s$, unless otherwise noted.)

1. 10-BIT A/D CONVERSION

| Item | HD46508A, HD46508A-1 | | | HD46508, HD46508-1 | | | Unit |
|-----------------------|----------------------|-----------|-----------|--------------------|-----------|-----------|------|
| | min | typ | max | min | typ | max | |
| Resolution | — | 10 | — | — | 10 | — | bits |
| Non-linearity Error * | — | $\pm 1/2$ | ± 1 | — | ± 1 | ± 3 | LSB |
| Zero-Error | — | $\pm 1/2$ | $\pm 3/4$ | — | $\pm 1/2$ | ± 1 | LSB |
| Full-Scall Error | — | $\pm 1/4$ | $\pm 1/2$ | — | $\pm 1/2$ | ± 1 | LSB |
| Quantization Error | — | — | $\pm 1/2$ | — | — | $\pm 1/2$ | LSB |
| Absolute Accuracy * | — | ± 1 | $\pm 3/2$ | — | ± 2 | ± 4 | LSB |

2. 8-BIT A/D CONVERSION

| Item | HD46508A, HD46508A-1 | | | HD46508, HD46508-1 | | | Unit |
|-----------------------|----------------------|-----------|-----------|--------------------|-----------|-----------|------|
| | min | typ | max | min | typ | max | |
| Resolution | — | 8 | — | — | 8 | — | bits |
| Non-linearity Error * | — | $\pm 1/8$ | $\pm 1/4$ | — | $\pm 1/4$ | $\pm 3/4$ | LSB |
| Zero-Error | — | $\pm 1/4$ | $\pm 3/8$ | — | $\pm 3/8$ | $\pm 1/2$ | LSB |
| Full-Scall Error | — | $\pm 1/4$ | $\pm 3/8$ | — | $\pm 3/8$ | $\pm 1/2$ | LSB |
| Quantization Error | — | — | $\pm 1/2$ | — | — | $\pm 1/2$ | LSB |
| Absolute Accuracy * | — | $\pm 5/8$ | $\pm 3/4$ | — | $\pm 3/4$ | $\pm 5/4$ | LSB |

3. PROGRAMMABLE VOLTAGE COMPARISON (PC)

| Item | HD46508A, HD46508A-1 | | | HD46508, HD46508-1 | | | Unit |
|-----------------------|----------------------|-----------|-----------|--------------------|-----------|-----------|------|
| | min | typ | max | min | typ | max | |
| Resolution | — | 8 | — | — | 8 | — | bits |
| Non-linearity Error * | — | $\pm 1/8$ | $\pm 1/4$ | — | $\pm 1/4$ | $\pm 3/4$ | LSB |
| Zero-Error | — | $\pm 1/4$ | $\pm 3/8$ | — | $\pm 3/8$ | $\pm 1/2$ | LSB |
| Full-Scall Error | — | $\pm 1/4$ | $\pm 3/8$ | — | $\pm 3/8$ | $\pm 1/2$ | LSB |
| Absolute Accuracy * | — | $\pm 3/8$ | $\pm 5/8$ | — | $\pm 1/2$ | ± 1 | LSB |

*Temperature Coefficient; 25 ppm of FSR/ $^\circ C$ (max)

HD46508, HD46508-1, HD46508A, HD46508A-1

● AC CHARACTERISTICS ($V_{CC} = 5.0V \pm 5\%$, $V_{SS} = 0V$, $T_a = -20 \sim +75^\circ C$, unless otherwise noted.)

1. CLOCK WAVEFORM

| Item | Symbol | Test Conditions | CD* = 0 | | | CD* = 1 | | | Unit |
|---------------------------|------------------|-----------------|---------|-----|-----|---------|-----|-----|---------|
| | | | min | typ | max | min | typ | max | |
| CLK Cycle Time | t_{cycC} | Fig. 2 | 1.0 | — | 10 | 0.5 | — | 5 | μs |
| CLK "High" Pulse Width | PW_{CH} | | 0.45 | — | 4.5 | 0.22 | — | 2.2 | μs |
| CLK "Low" Pulse Width | PW_{CL} | | 0.40 | — | 4.0 | 0.21 | — | 2.1 | μs |
| Rise and Fall Time of CLK | t_{Cr}, t_{Cf} | | — | — | 25 | — | — | 25 | ns |

* CD : CLK Divider bit

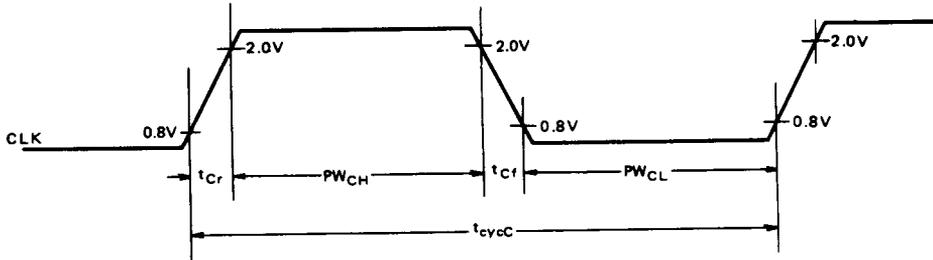


Figure 2 CLK Waveform

2. \overline{IRQ} , GAINSEL OUTPUT

| Item | Symbol | Test condition | min | typ | max | Unit |
|-------------------------------|------------|----------------|-----|-----|-----|------|
| \overline{IRQ} Release Time | t_{IR} | Fig. 3 | — | — | 750 | ns |
| GAINSEL Delay Time | t_{GSD1} | Fig. 4 | — | — | 750 | ns |
| | t_{GSD2} | | — | — | 750 | ns |

t_{GSD1} : TTL Load
 t_{GSD2} : CMOS Load


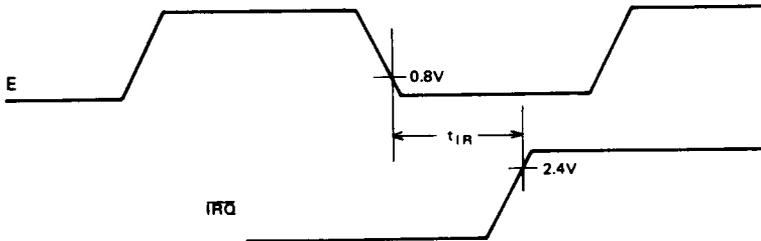


Figure 3 \overline{IRQ} Release Time



HD46508, HD46508-1, HD46508A, HD46508A-1

(1) Sample & Hold

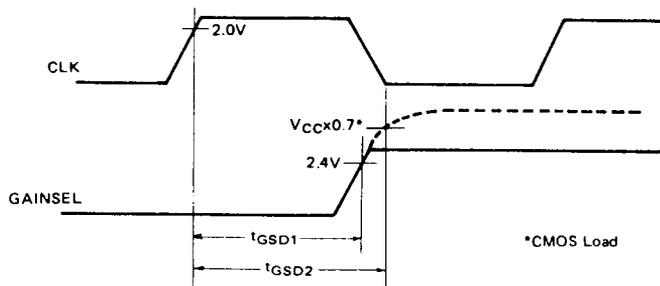

(2) x2, x4 Auto Range-Switching, Programmable Gain

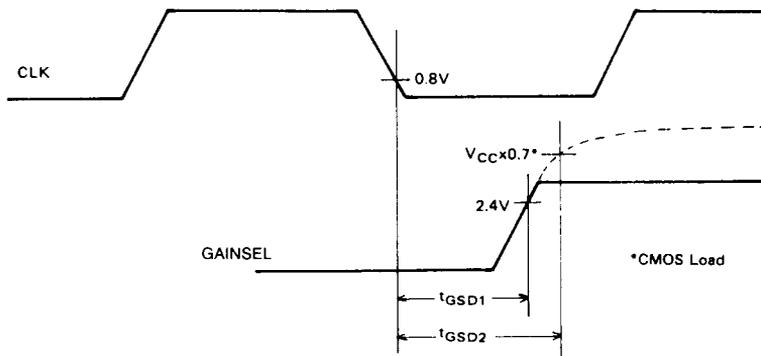


Figure 4 GAINSEL Delay Time

3. BUS TIMING CHARACTERISTICS

READ OPERATION SEQUENCE

| Item | Symbol | Test Condition | HD46508 HD46508A | | | HD46508-1 HD46508A-1 | | | Unit |
|------------------------------|------------------|----------------|---------------------|-----|-----|-------------------------|-----|-----|---------|
| | | | min | typ | max | min | typ | max | |
| Enable Cycle Time | t_{cycE} | Fig. 5 | 1.0 | — | — | 0.666 | — | — | μs |
| Enable "High" Pulse Width | PW_{EH} | | 0.45 | — | — | 0.28 | — | — | μs |
| Enable "Low" Pulse Width | PW_{EL} | | 0.40 | — | — | 0.28 | — | — | μs |
| Rise and Fall Time of Enable | t_{Er}, t_{Ef} | | — | — | 25 | — | — | 25 | ns |
| Address Set Up Time | t_{AS} | | 140 | — | — | 140 | — | — | ns |
| Data Delay Time | t_{DDR} | | — | — | 320 | — | — | 220 | ns |
| Data Access Time | t_{ACC} | | — | — | 460 | — | — | 360 | ns |
| Data Hold Time | t_H | | 10 | — | — | 10 | — | — | ns |
| Address Hold Time | t_{AH} | | 10 | — | — | 10 | — | — | ns |



HD46508, HD46508-1, HD46508A, HD46508A-1

WRITE OPERATION SEQUENCE

| Item | Symbol | Test Condition | HD46508 HD46508A | | | HD46508-1 HD46508A-1 | | | Unit |
|------------------------------|------------------|----------------|---------------------|-----|-----|-------------------------|-----|-----|---------|
| | | | min | typ | max | min | typ | max | |
| Enable Cycle Time | t_{cycE} | Fig. 6 | 1.0 | — | — | 0.666 | — | — | μs |
| Enable "High" Pulse Width | PW_{EH} | | 0.45 | — | — | 0.280 | — | — | μs |
| Enable "Low" Pulse Width | PW_{EL} | | 0.40 | — | — | 0.280 | — | — | μs |
| Rise and Fall Time of Enable | t_{Er}, t_{Ef} | | — | — | 25 | — | — | 25 | ns |
| Address Set Up Time | t_{AS} | | 140 | — | — | 140 | — | — | ns |
| Data Set Up Time | t_{DSW} | | 195 | — | — | 80 | — | — | ns |
| Data Hold Time | t_H | | 10 | — | — | 10 | — | — | ns |
| Address Hold Time | t_{AH} | | 10 | — | — | 10 | — | — | ns |

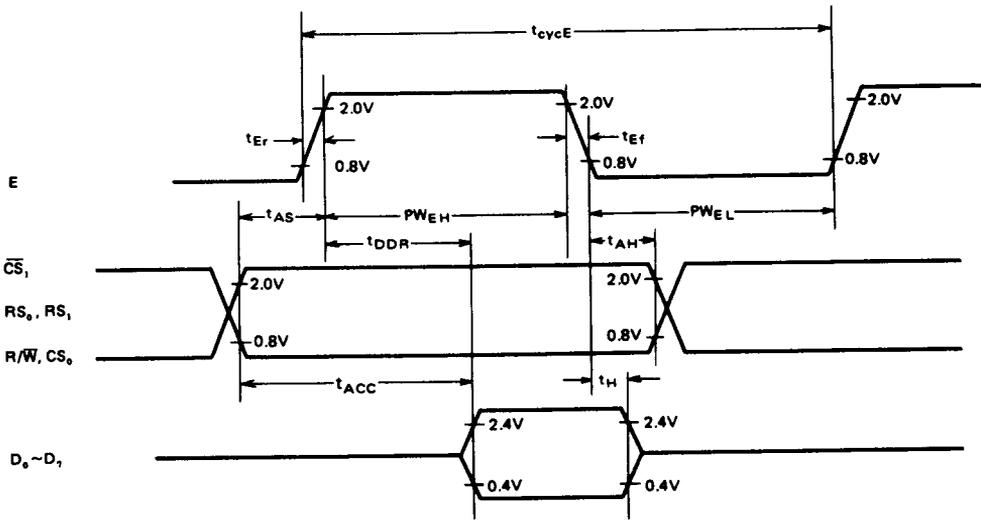


Figure 5 Read Timing



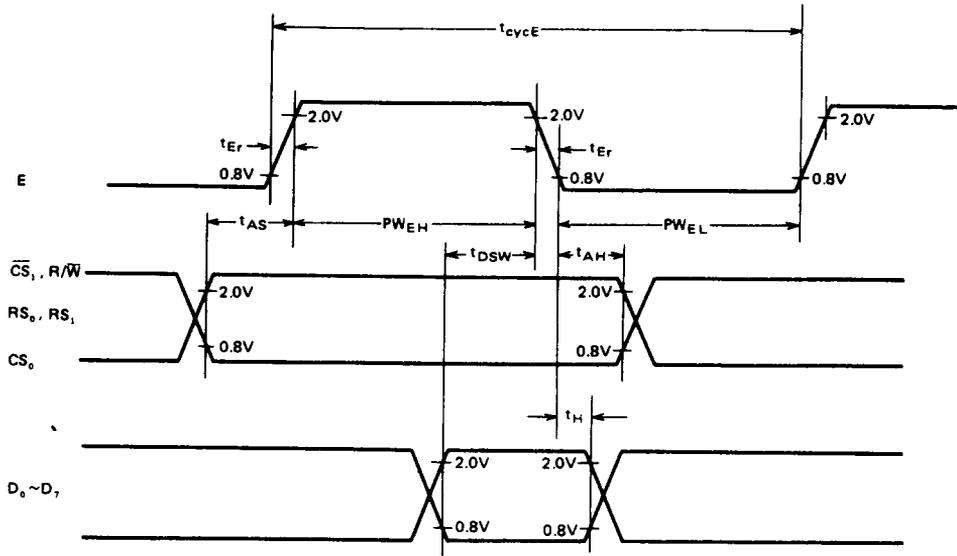


Figure 6 Write Timing

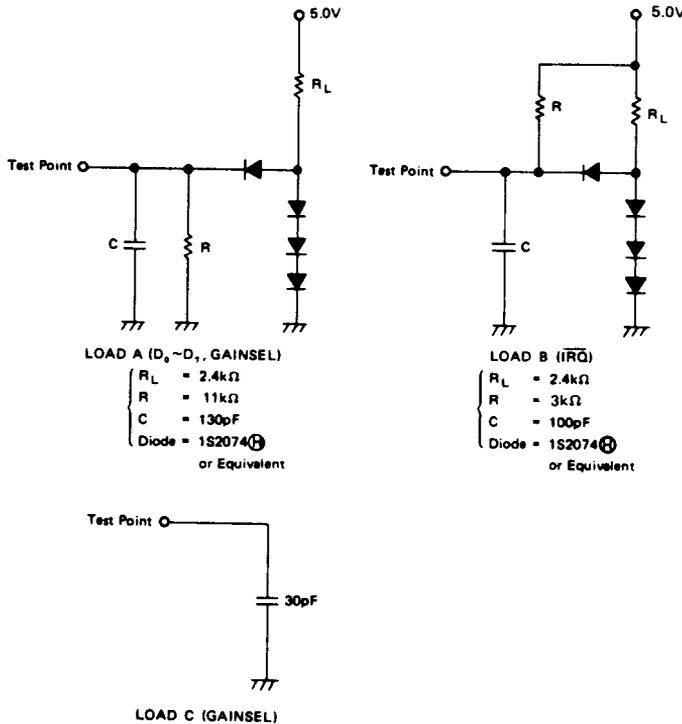


Figure 7 Test Load

■ SIGNAL DESCRIPTION

● Processor Interface

Data Bus (D₀~D₇)

The Bi-directional data lines (D₀~D₇) allow data transfer between the ADU and MPU. Data bus output drivers are three state buffers that remain in the high-impedance state except when MPU performs a ADU read operation.

Enable (E)

The Enable signal (E) is used as strobe signal in MPU R/W operation with the ADU internal registers. This signal is normally derived from the HMCS6800 system clock (φ₂).

Chip Select (CS₀, CS₁)

The Chip Select lines (CS₀, CS₁) are used to address the ADU. The ADU is selected when CS₀ is at "High" and CS₁ is at "Low" level.

Read/Write (R/W)

The R/W line controls the direction of data transfer between the ADU and MPU. When R/W is at "High" level, data of ADU is transferred to MPU. When R/W is at "Low" level, data of MPU is transferred to ADU.

Register Select (RS₀, RS₁)

The Register Select line (RS₀, RS₁) are used to select one of the 4 ADU internal registers. Table 1 shows the relation between (RS₀, RS₁) address and the selected register. The lowest 2 address lines of MPU are usually used for these signals.

Reset (RES)

This input is used to reset the ADU. An input "Low" level on RES line forces the ADU into following status.

- 1) All the shift-registers in ADU are cleared and the conversion operation is stopped.
- 2) The GAINSEL output goes down to "Low" level. The IRQ output is made "Off" state and the D₀~D₇ are made high impedance state.

Interrupt Request (IRQ) (Open Drain Output)

This output line is used to inform the A/D conversion end signal to the MPU. This signal becomes active "Low" level when IE bit in the control register 1 is "1" and IRQ bit in the control register 2 goes "1" at the end of conversion. And this signal returns to "High" right after The MPU reads the A/D Data Register (R3). Programmable voltage comparison

does not affect this signal.

● Analog Data Interface

Analog Input (AI₀~AI₁₅)

The Input Analog Data to be measured is applied to these Analog Input (AI₀~AI₁₅). These are multiplexed by internal 16 channel multiplexer and output to COMMOM pin. A particular input channel is selected when the multiplexer channel address is programmed into the control Register 1 (R1).

Multiplexer Common Output (COMMON)

This signal is the output of the 16 channel analog multiplexer, and may be connected to the input of pre-amplifier or sample/hold circuit according to user's purposes. When no external circuit needed, this output should be connected to the COMPIN input.

Comparator Input (COMPIN)

This is a high impedance input line that is used to transmit selected analog data to comparator. The COMMON line is usually connected to this input. When external Pre-amplifier or Sample/hold circuit is used, output of these circuits may be connected to this input.

Reference Voltage (+) (REF (+))

This line is used to apply the standard voltage to the internal ladder resistors.

Reference Voltage (-) (REF (-))

This line is connected to the analog ground.

● ADU Control

Conversion Clock (CLK)

The CLK is a standard clock input signals which defines internal timing for A/D conversion and PC operation.

Gain Select (GAINSEL) (CMOS Compatible Output)

This output is used to control the external circuit. The function of this signal is programmable and it is specified by (G1, G0) bits in Control Register 0. By using this output, user can control the auto-range-switching of external pre-amplifier, also control external sample & hold circuit, etc. as well.

[NOTE] This LSI is different from other HMCS6800 family LSIs in following function

- RES doesn't affect IE bit of R0

■ FUNCTION OF INTERNAL REGISTERS

● Structure

Table 1 Internal Registers of the ADU

| CS ₁ | CS ₀ | RS ₁ | RS ₀ | Reg. # | Register Name | Read | Write | Data Bit | | | | | | | | |
|-----------------|-----------------|-----------------|-----------------|--------|--------------------------------|------|-------|----------|-----|-----|----|----|----|----|----|----|
| | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0 | 1 | 0 | 0 | R0 | Control Register 0 | ○ | ○ | IE | CD | ST | | | | | G1 | G0 |
| 0 | 1 | 0 | 1 | R1 | Control Register 1 | ○ | ○ | SC | GS | PC | MI | D3 | D2 | D1 | D0 | |
| 0 | 1 | 1 | 0 | R2 | Status & A/D Data Register (H) | ○ | x | IRQ | BSY | PCO | | OV | DW | C9 | C8 | |
| 0 | 1 | 1 | 1 | R3 | A/D Data Register (L) | ○ | x | C7 | C6 | C5 | C4 | C3 | C2 | C1 | C0 | |
| 0 | 1 | 1 | 1 | R4 | PC Data Register | x | ○ | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | |

(Note) ○ --- YES
x --- NO

HD46508, HD46508-1, HD46508A, HD46508A-1

Control Register 0 (R0)




| | "1" | "0" |
|-------------------|-------------|---------------|
| Mode Select | See Table 2 | |
| Not Used | | |
| Not Used | | |
| Not Used | | |
| Settling Time | Available | Not Available |
| CLK Divider | CLK/2 | CLK |
| Interrupt Enable* | Enable IRQ | Mask IRQ |

Figure 8 Control Register 0

*RES doesn't affect IE bit.


Control Register 1 (R1)



| | "1" | "0" |
|-------------------------|-----------------------|--------------------|
| MPX Channel Address | See Table 3 | |
| MPX Inhibit | Inhibited | Not Inhibited |
| Prog. Comparator Select | Prog. Comparator mode | A/D Converter mode |
| GAINSEL Enable | GAINSEL Enable | GAINSEL Disable |
| Short-cycle Conversion | 8-bit Length | 10-bit Length |

Figure 9 Control Register 1

Status & A/D Data Register (H)



| | "1" | "0" |
|--------------------------------|--------------------|----------------------|
| Upper bit (10 bit data) | | |
| Data Weight | See Table 4. | |
| Data Over Scale flag | Data is over scale | Within the scale |
| Not Used | | |
| Programmable Comparator Output | $V_{Ain} > V_p$ | $V_{Ain} < V_p$ |
| Busy flag | Under Conversion | Conversion Completed |
| IRQ flag | Requested | Not Requested |


V_{Ain} : Unknown Input Voltage

V_p : Programmed Voltage by R4

C9, C8 bits are cleared when 8 bit A/D conversion is performed.

Figure 10 Status & A/D Data Register (H)

A/D Data Register (L)



Lower order 8 bit Data (Normal 10 bit Conversion)
8 bit Data (8 bit Short-cycle Conversion)

Figure 11 A/D Data Register (L)



PC Data Register

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |

8 bit Data for Programmable Voltage Comparison

Figure 12 PC Data Register

● **Description for the Internal Registers**

Control Register 0 (R0)

This Register is a 5-bit read/write register that is used to specify Interrupt Enable (IE), CLK Divider (CD), Settling Time (ST) and Mode Select (G0, G1). This Register should be written before writing R1.

IE bit:
(Interrupt Enable)

IE = "1", Interrupt is requested through the IRQ output.
IE = "0", Interrupt is masked.

CD bit:
(Clock Divider)

CD = "1", CLK ÷ 2 is used as internal clock.
CD = "0", CLK is used directly.

ST bit:
(Settling Time)

ST = "1", First comparison is executed after 1 expanded cycle in order to compensate external amplifiers settling delay.
ST = "0", Cycle is not delayed.

G0, G1 bit:
(Mode select)

These bits are used to specify the function of GAINSEL signal when GS bit is "1"

Table 2 Function of G0, G1

| G1 | G0 | Mode Select |
|----|----|---------------------------|
| 0 | 0 | Sample & Hold |
| 0 | 1 | Auto Range-Switching x 2 |
| 1 | 0 | Auto Range-Switching x 4 |
| 1 | 1 | Programmable Gain Control |

Control Register 1 (R1)

This register is an 8-bit read/write register that is used to store the command for A/D conversion mode and programmable comparison mode. This register includes MPX channel address (D0~D3), MPX inhibit (MI), programmable comparator select (PC), GAINSEL enable (GS) and short-cycle conversion (SC) bits. When this register (R1) is programmed, each conversion mode starts.

SC bit
(Short-cycle)

SC = "1", Short-cycle conversion (8 bit length)
SC = "0", Normal conversion (10 bit length)

GS bit
(GAINSEL Enable)

GS = "1", GAINSEL signal is enabled. The function of GAINSEL is specified by (G0, G1) bits.
GS = "0", GAINSEL signal is disabled. ("Low" level)

PC bit
(Program comparator)

PC = "1", Programmable voltage comparator mode
PC = "0", A/D conversion mode

MI bit
(MPX Inhibit)

MI = "1", Internal MPX channel is inhibited in order to use external MPX channel.
MI = "0", Internal MPX channel is used.

D0~D3
(MPX channel)

These bits are used to select the particular MPX channel.

Table 3 MPX Channel Addressing

| Channel #1 | D3 | D2 | D1 | D0 | Analog Input |
|------------|----|----|----|----|------------------|
| 0 | 0 | 0 | 0 | 0 | AI ₀ |
| 1 | 0 | 0 | 0 | 1 | AI ₁ |
| 2 | 0 | 0 | 1 | 0 | AI ₂ |
| 3 | 0 | 0 | 1 | 1 | AI ₃ |
| 4 | 0 | 1 | 0 | 0 | AI ₄ |
| 5 | 0 | 1 | 0 | 1 | AI ₅ |
| 6 | 0 | 1 | 1 | 0 | AI ₆ |
| 7 | 0 | 1 | 1 | 1 | AI ₇ |
| 8 | 1 | 0 | 0 | 0 | AI ₈ |
| 9 | 1 | 0 | 0 | 1 | AI ₉ |
| 10 | 1 | 0 | 1 | 0 | AI ₁₀ |
| 11 | 1 | 0 | 1 | 1 | AI ₁₁ |
| 12 | 1 | 1 | 0 | 0 | AI ₁₂ |
| 13 | 1 | 1 | 0 | 1 | AI ₁₃ |
| 14 | 1 | 1 | 1 | 0 | AI ₁₄ |
| 15 | 1 | 1 | 1 | 1 | AI ₁₅ |



HD46508, HD46508-1, HD46508A, HD46508A-1

Table 4 Function Select

| PC | SC | Function | GS | (G0, G1) |
|----|----|--------------------|----|----------|
| 0 | 0 | 10 bit AD CONV. | 0 | DISABLE |
| | | | 1 | ENABLE* |
| | 1 | 8 bit AD CONV. | 0 | DISABLE |
| | | | 1 | ENABLE* |
| 1 | x | PROG. COMP (8 bit) | x | DISABLE |

x = Do not care

* = See Table 6

[NOTE] CD bit and ST bit are effective in every case.

Status & A/D Data Register (H) (R2)

This register is a 7-bit read only register that is used to store the upper 2-bit data (C8, C9), data weight (DW), data overscale (OV), programmable comparator output (PCO), busy (BSY) and interrupt request (IRQ).

(C8, C9) : These bits store upper 2-bit data measured by 10 bit length conversion.

DW bit (Data weight) : This bit indicates data weight when Auto range-switching mode is selected. This bit is set or reset when the conversion has completed. The conditions are shown in following Table. In this mode GAINSEL output also goes "High" or "Low" on the same condition shown in Table 5. Other status of DW bit is shown in Table 6.

OV bit (Over scale) : This bit is set when analog data is greater than or equal to reference Voltage ($V_{REF(+)}$).

PCO bit (Programmable comparator Output) : This bit indicates the result of programmable voltage comparison.
 "1" → PCO $V_{Ain} > V_p$
 "0" → PCO $V_{Ain} < V_p$
 V_{Ain} : Analog Input Voltage to be compared
 V_p : Programmed Voltage (R4)

BSY bit (Busy) : This bit indicates that the ADU is now under conversion.

IRQ bit (Interrupt Request) : This bit is set when the A/D conversion has completed and cleared by reading the R3.

A/D Data Register (L) (R3)

This register is an 8-bit read-only register that is used to store the lower 8 bits data of 10-bit conversion or full 8 bits data of the 8-bit conversion.

PC Data Register (R4)

This register is an 8-bit write-only register prepared for Programmable Voltage comparison. Stored data is converted to digital voltage, and compared with analog input to be measured. The result of comparison is set into PCO bit.

Table 5 Data Weight (DW) Set or Reset Condition

| Mode \ Condition | Set ("1") | Reset ("0") |
|---------------------------|---|---|
| Auto Range-Switching (x2) | $V_{Ain} < \frac{410}{1024} \cdot V_{REF(+)}$ | $V_{Ain} > \frac{410}{1024} \cdot V_{REF(+)}$ |
| Auto Range-Switching (x4) | $V_{Ain} < \frac{206}{1024} \cdot V_{REF(+)}$ | $V_{Ain} > \frac{206}{1024} \cdot V_{REF(+)}$ |

V_{Ain} : Analog Input Voltage to be measured

$V_{REF(+)}$: Voltage Applied to REF(+)



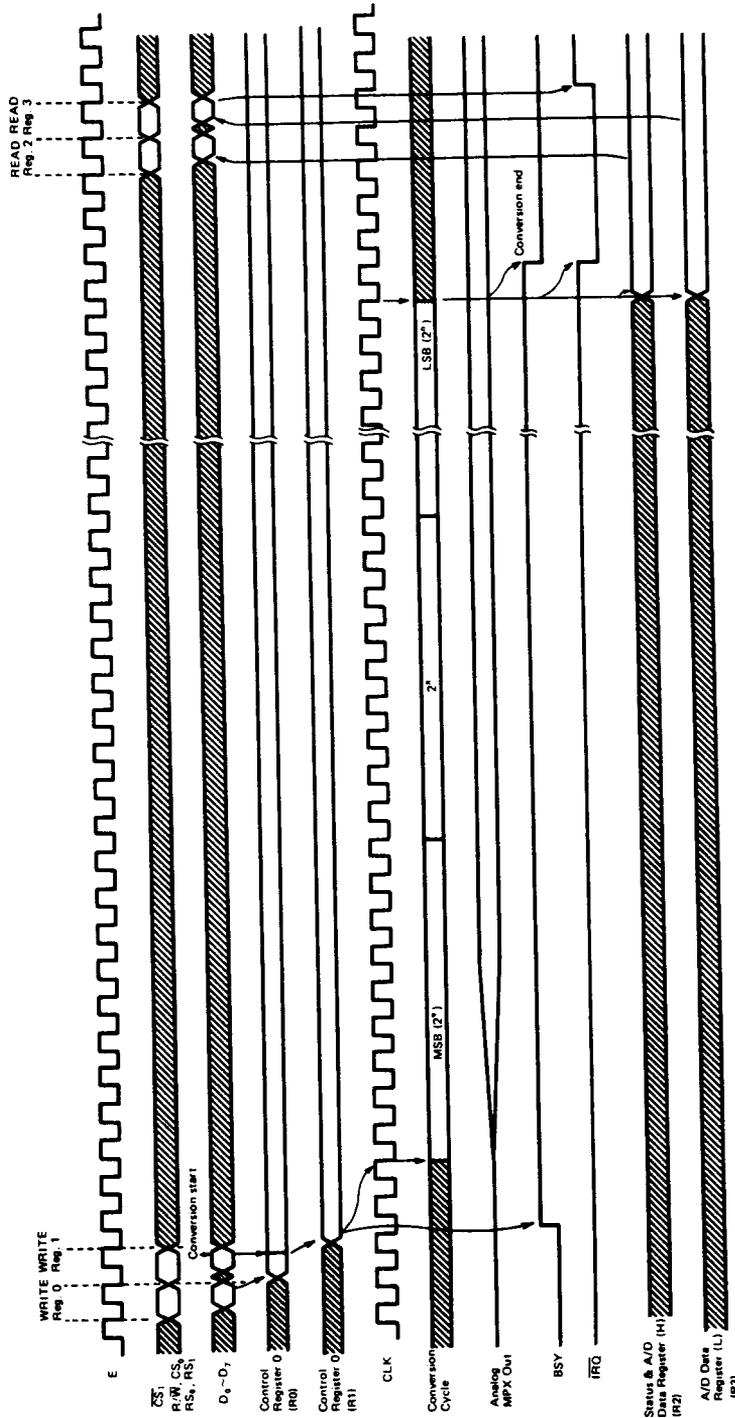


Figure 13 A/D Conversion Timing Chart (Basic Sequence)


HD46508, HD46508-1, HD46508A, HD46508A-1

• A/D Conversion and PC sequence ($t_{cyc}=1\mu s$)


10 bits A/D Conversion

1) Basic Sequence

(SC = "0"
ST = "0"
GS = "0")

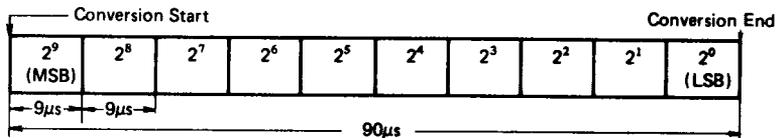


2) Basic Sequence (When overscale is detected)



↑
Overscale check Cycle
(Analog Input is compared with $V_{REF(+)}$.)

3) Expanded Sequence


(SC = "0"
ST = "1"
GS = "0")



MSB cycle is expanded to compensate external amplifier's settling delay.

4) Auto Range-Switching Control Sequence


(SC = "0"
ST = "0"
GS = "1"
G0 = "0"
G1 = "1")
or
(SC = "0"
ST = "0"
GS = "1"
G0 = "1"
G1 = "0")

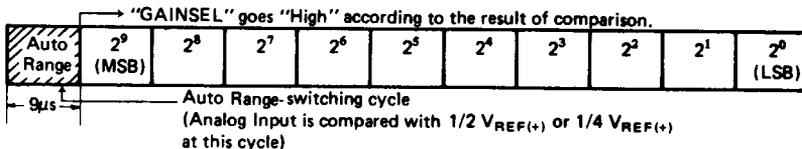


5) Auto Range-Switching & Expansion Control Sequence

(SC = "0"
ST = "1"
GS = "1"
G0 = "0"
G1 = "1")
or
(SC = "0"
ST = "1"
GS = "1"
G0 = "1"
G1 = "0")

a) Analog Input < $1/2 V_{REF(+)}$ or $1/4 V_{REF(+)}$

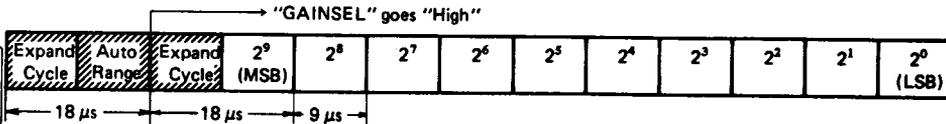


b) Analog Input > $1/2 V_{REF(+)}$ or $1/4 V_{REF(+)}$




6) Sample & Hold Control Sequence

(SC = "0"
ST = "0"
GS = "1"
G0 = "0"
G1 = "0")

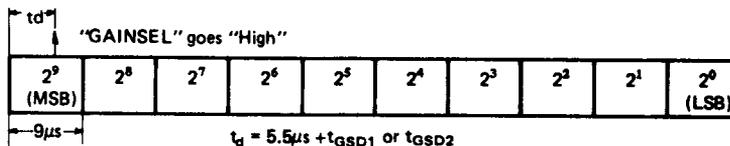


7) Programmable Gain Control Sequence

SC = "0"
ST = "0"
GS = "1"
G0 = "1"
G1 = "1"

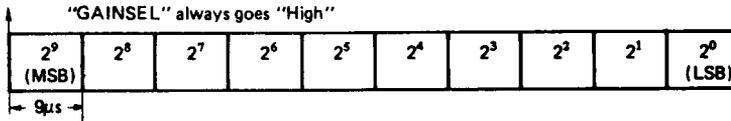

8) Programmable Gain & Expansion Control Sequence


SC = "0"
ST = "1"
GS = "1"
G0 = "1"
G1 = "1"

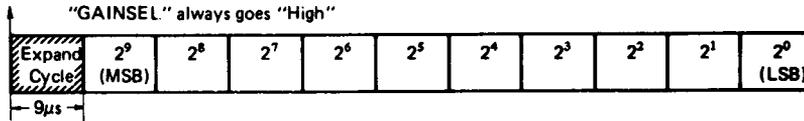

8 Bit A/D Conversion

1) Basic Sequence


SC = "1"
ST = "0"
GS = "0"



↑
Additional conversion cycle for rounding the LSB - 1 Bit.

2) Expanded Sequence

SC = "1"
ST = "1"
GS = "0"



Programmable Voltage Comparison


1) Basic Sequence

PC = "1"
ST = "0"



2) Expanded Sequence

PC = "1"
ST = "1"



■ HOW TO USE THE ADU

● Functions of GAINSEL

The ADU is equipped with programmable GAINSEL output signal. By using GAINSEL output and external circuit, the ADU is able to implement following control.

- 1) Auto Range-Switching (Auto Gain) Control
 - 2) Programmable Gain control
 - 3) Sample & Hold control
- GAINSEL output is controlled by Mode Select bit (G0, G1) when GAINSEL enable bit (GS) is "1".

Table 6 GAINSEL Control

| GS | G1 | G0 | GAINSEL | Control Mode | DW |
|----|----|----|---------|----------------------------------|----|
| 0 | x | x | "Low" | Normal Use (GAINSEL is not used) | 0 |
| 1 | 0 | 0 | "High" | Sample & Hold control | 0 |
| 1 | 0 | 1 | * | Auto Range Switching x 2 control | ** |
| 1 | 1 | 0 | * | Auto Range Switching x 4 control | ** |
| 1 | 1 | 1 | "High" | Programmable Gain control | 1 |

* GAINSEL goes "High" or "Low" according to the condition shown in Table 5.
** See, Table 5.

How to Control External Circuit

(1) Sample & Hold Control (G1=0, G0=0)

An example of Sample & Hold circuit is shown in Fig. 14. When ADU is set in Sample & Hold Control Mode, GAINSEL becomes "High" level on conversion and controls the data holding.

(2) Automatic Range Switching Control (G1=0, G0=1 or G1=1, G0=0)

The GAINSEL signal controls the external amplifier which can change the ratio of voltage amplification. (GAIN: 1 → 2 times or 1 → 4 times). Fig. 15 shows Automatic Range Switching Control. In this case, when the input voltage is lower than $206/1024 V_{REF(+)}$, GAINSEL becomes "High" level. This makes the GAIN of the amplifier change from 1 to 4 times, and 4 times value of the input voltage is A/D converted. Using this function even if an input signal is small, it is possible to execute A/D conversion in nearly full scale. In this mode, when GAINSEL signal becomes "High", DW bit becomes "1" to show the range switching is in a progress.

(3) Programmable GAIN Control (G1=1, G0=1)

The GAINSEL signal is used for controlling the external amplifier of any GAIN which is fit to the system.

In this mode, GAINSEL always becomes "High" at the beginning of A/D conversion, so the change of range is controlled by GS bit. Converted data need to be corrected in software in accordance with GAIN of the amplifier.

This mode is effective in the case of converting very small input voltage.

(Note) Refer to "ADU Function Sequence" (A/D Conversion and PC Sequence) for the timing in which GAINSEL signal becomes "High". GAINSEL signal becomes "Low" in accordance with "1" → "0" change of BSY bit. Refer to Fig. 13.

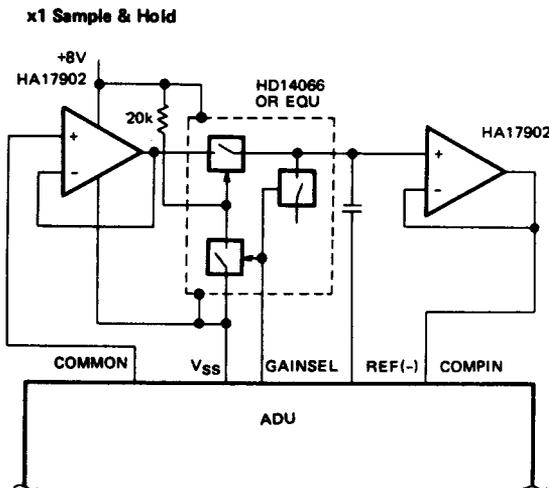


Figure 14 Sample & Hold Circuit


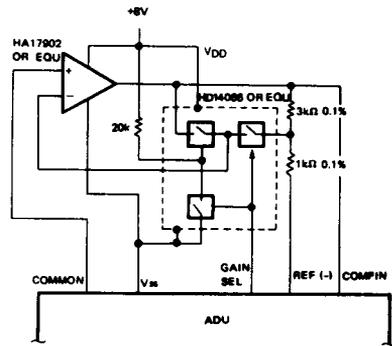


Figure 15 Pre-amplifier Circuit
(x1, x4 Auto-Range Switching)

• Overscale Check

ADU is equipped with hardware overscale detection function. The overscale detection is performed automatically when the result of A/D conversion is $2^n - 1$ (all bits = 1). When analog input V_{IN} is higher than $V_{REF(+)}$, overscale bit (OV) is set to "1". The definition of the overscale is illustrated in Fig. 17. And the flow of overscale check is shown in Fig. 16.

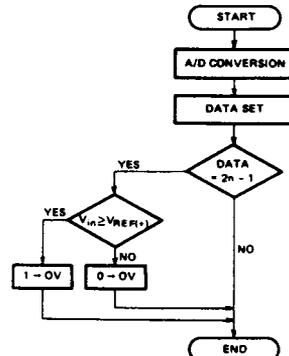

| OV | DATA | NOTE |
|----|------------|---------------|
| 0 | 11 1 | NOT OVERSCALE |
| 1 | 11 1 | OVERSCALE |

Figure 16 Overscale Check Flow

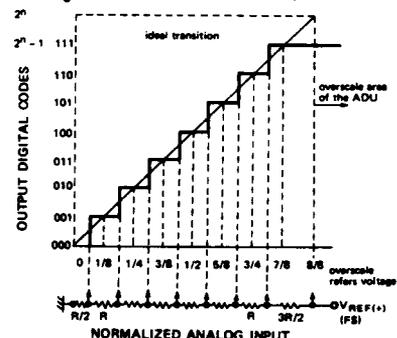


Figure 17 Definition ADU's Overscale

● Usage of the PC

The ADU has a programmable threshold voltage comparator (PC) function. The threshold voltage is pre-settable from 0V to 5V range with 8 bit resolution. The comparator's

output is stored into PCO bit at the end of comparision.

The programmable voltage comparison time is so short that the interrupt is not requested at this mode. The end of comparison needs to be confirmed by reading the 1→0 transition of the BSY bit in R2.

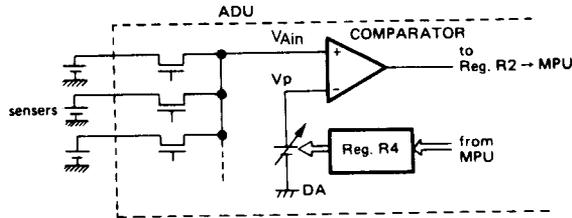


Figure 18 Function Diagram of the PC

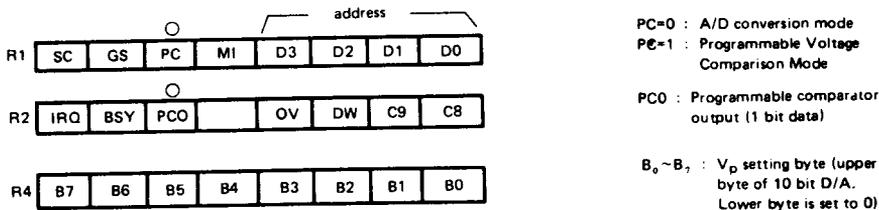


Figure 19 Registers of the PC Mode


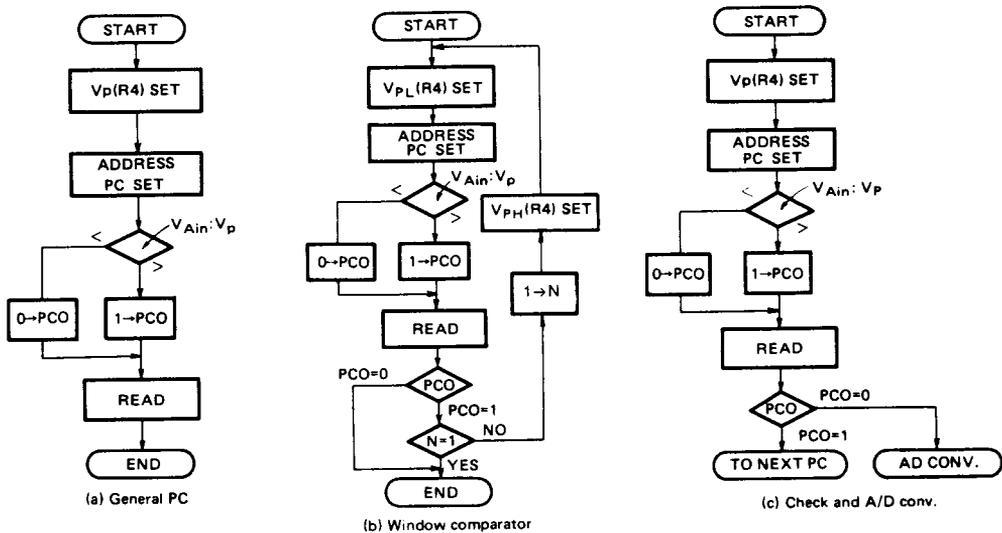


Figure 20 PC Application Flow Chart Examples




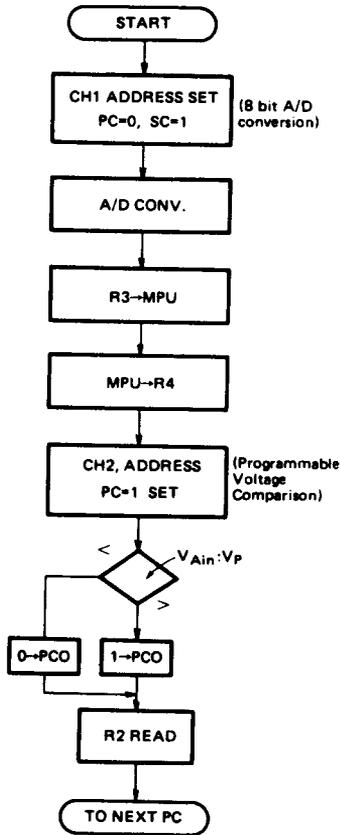


(d) Voltage Comparison between two channels.

Figure 20 PC Application Flow Chart Examples (continued)

■ EXAMPLE OF APPLIED CIRCUIT OF THE ADU

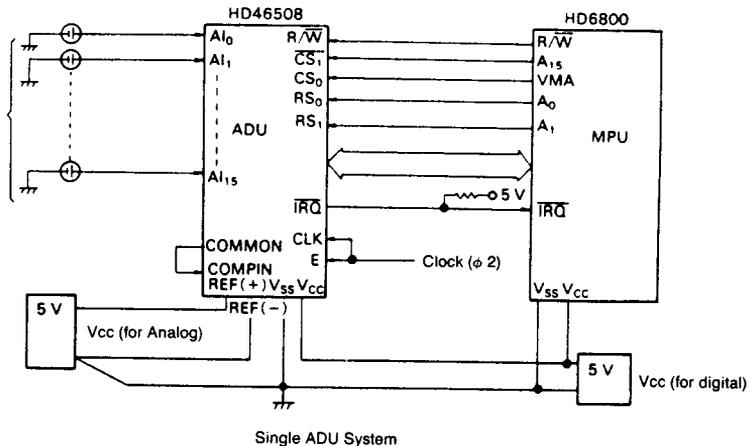


- How to use MI bit
 MI bit (R1) functions as follows.
 MI = 1: Internal MPX channel is inhibited in order to use attached external MPX channel.
 MI = 0: Internal MPX channel is enabled.
 MI bit used to select either of External MPX and Internal MPX. External MPX is connected as follows.

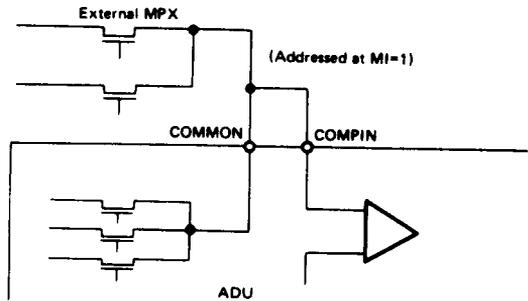

[NOTE] When external MPX is used as the way figure 20, 1 dummy AD conversion or PC at MI=1 should be performed.

Figure 21 How to use External MPX

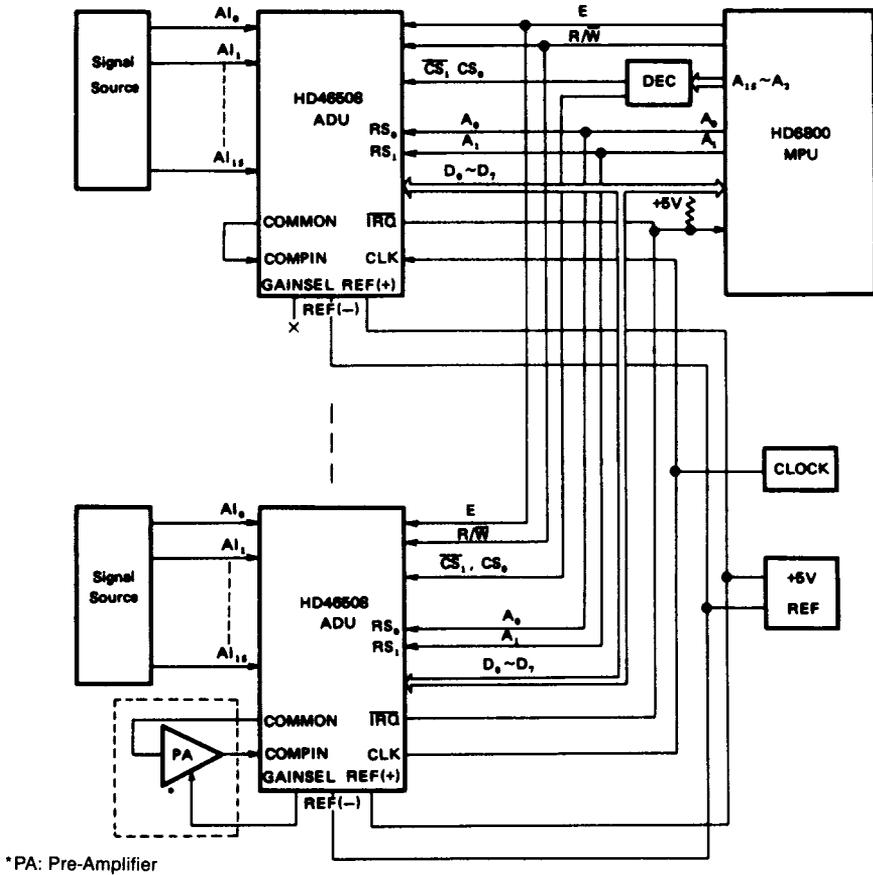

*PA: Pre-Amplifier

Figure 23 Multi ADU System



■ DEFINITIONS OF ACCURACY

Definitions of accuracy applied to HD46508 are as follows.

- (1) Resolution ... The number of output binary digit.
- (2) Offset Error ... The difference between actual input voltage and ideal input voltage for the first transition. (when digital output code is changed from 000 ... 00 to 000 ... 01.)
- (3) Full Scale Error ... The difference between actual input voltage and ideal input voltage for the final transition. (when digital output code is changed from 111 ... 10 to 111 ... 11.)
- (4) Quantizing Error ... Error equipped in A/D converter inherently. Always $\pm 1/2$ LSB is applied.
- (5) Non-linearity Error ... The maximum deviation of the actual transfer line from an ideal straight line. This error doesn't include Quantizing Error, Offset, or Full Scale Errors.
- (6) Absolute Accuracy ... The deviation of the digital output code from an analog input voltage. Absolute accuracy includes all of (2), (3), (4), (5).

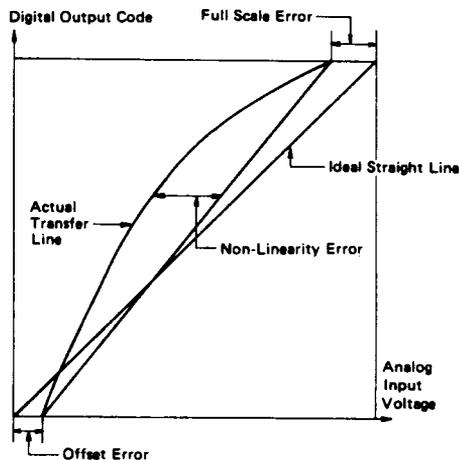
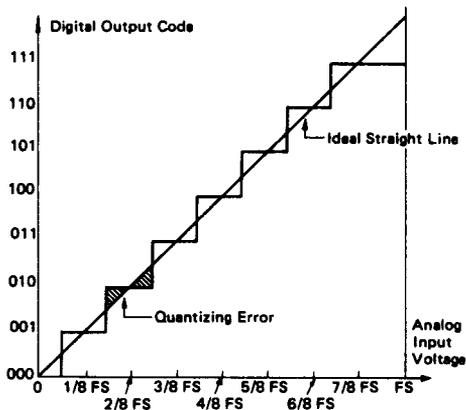


Figure 24 Definition of Accuracy